



Product Catalog

Trane Rental Services

I-Line Panels





Introduction

Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

Trademarks

All trademarks referenced in this document are the trademarks of their respective owners.



Table of Contents

Horizontal I-Line Panel 800A	4
RSIP800S0	4
Vertical I-Line Panel 1200A	6
RSIP1200S0 and RSIP1200J0	6
Vertical I-Line Panel 3000A	13
RSIP3000S0	13
Breaker List	15



Horizontal I-Line Panel 800A

RSIP800S0

General Information

- I-line interior rated for 600 V
- UL50, 1640 listed
- C(ETL) listed
- NEMA 3R
- Largest breaker size - 800 A¹

Features

- Corrosion-resistant aluminum construction
- Adaptable I-Line due to changeable gland plates
- Adaptable heavy-duty cage with forklift pockets
- Metal casters with industrial grade floor locks²

Table 1. Input

Label	Value
Panel mount	Two sets of 16 series cam-type connection
Hardwire access	Bottom conduit trap door
Wire size	Maximum 750 MCM (four per phase)

Table 2. Output

Label	Value
Hardwire access	Bottom conduit trap door

Table 3. Dimensions and weights

Label	Value
Length	5 ft – 2 in.
Width	2 ft – 1 in.
Height	3 ft – 7 in.
Weight	500 lb


Note: Actual weight and physical dimensions may vary.

¹ Panel cannot accommodate main breaker switch.

² Not applicable to all panels.

Horizontal I-Line Panel 800A

Figure 1. RSIP800A I-Line panel

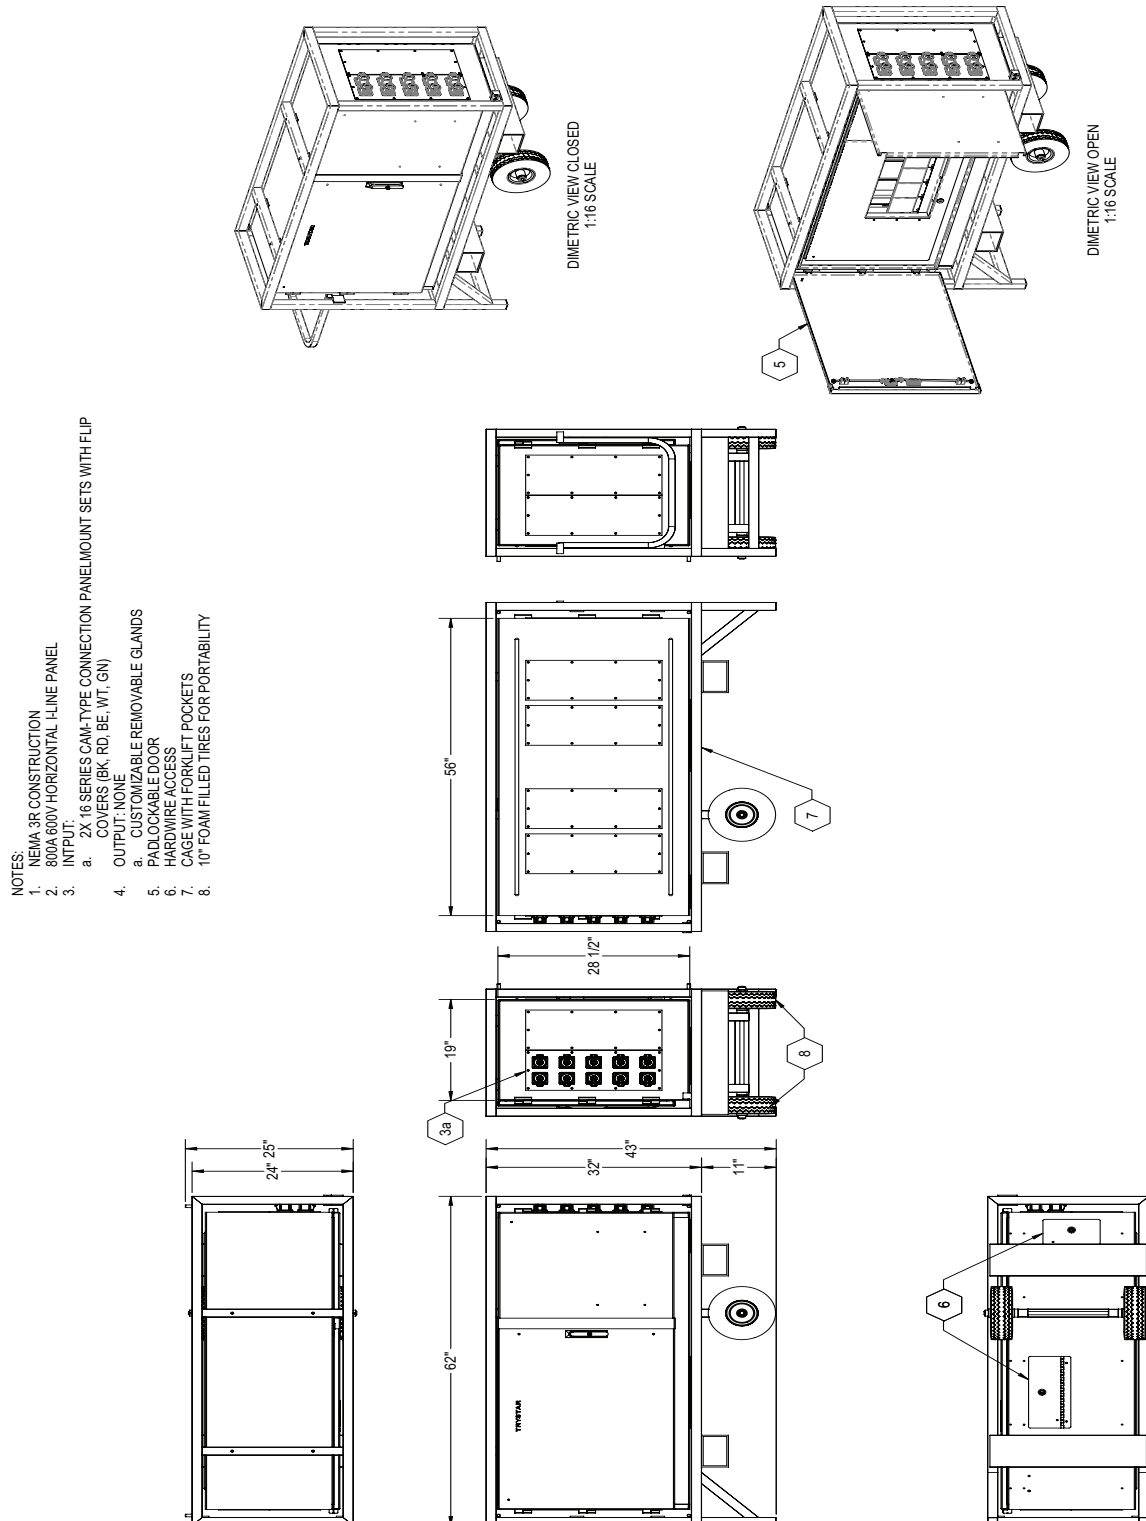



Vertical I-Line Panel 1200A

RSIP1200S0 and RSIP1200J0

General Information

- I-line interior rated for 600 V
- UL50 listed
- NEMA 3R
- 65 KAIC rating when using 65 KAIC-rated breakers
- Largest breaker size - 800 A¹

Features

- Corrosion-resistant aluminum construction
- Adaptable I-Line due to changeable gland plates
- Adaptable heavy-duty cage with forklift pockets
- Metal casters with industrial grade floor locks²

Table 1. Input

Label	Value
Panel mount	Four sets of 16 series cam-type connection
Hardwire access	Bottom conduit trap door
Wire size	Maximum 750 MCM (four per phase)

Table 2. Output

Label	Value
Hardwire access	Bottom conduit trap door

Table 3. Dimensions and weights


Label	Value
Length	4 ft – 3 in.
Width	3 ft – 1 in.
Height	6 ft – 10 in.
Weight	600 lb

Note: Actual weight and physical dimensions may vary.

¹ Panel cannot accommodate main breaker switch.


² Not applicable to all panels.

Figure 1. RSIP1200A I-Line panel (S0AA-S0AL)(S0AV-S0BF)

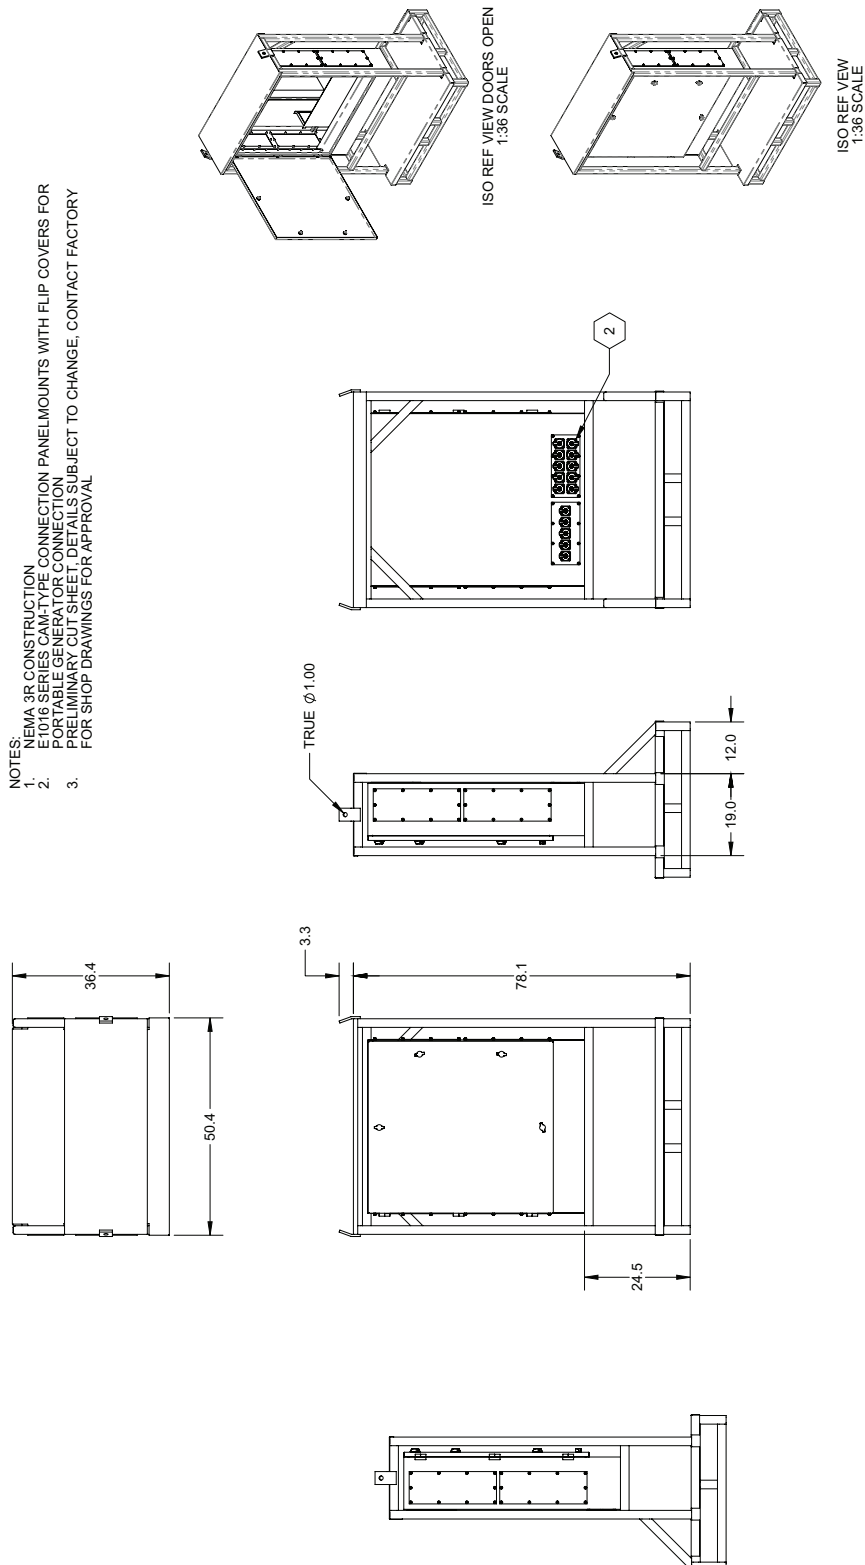


Vertical I-Line Panel 1200A

Figure 2. RSIP1200A I-Line panel (S0AM-S0AS)(S0BG-S0BM)

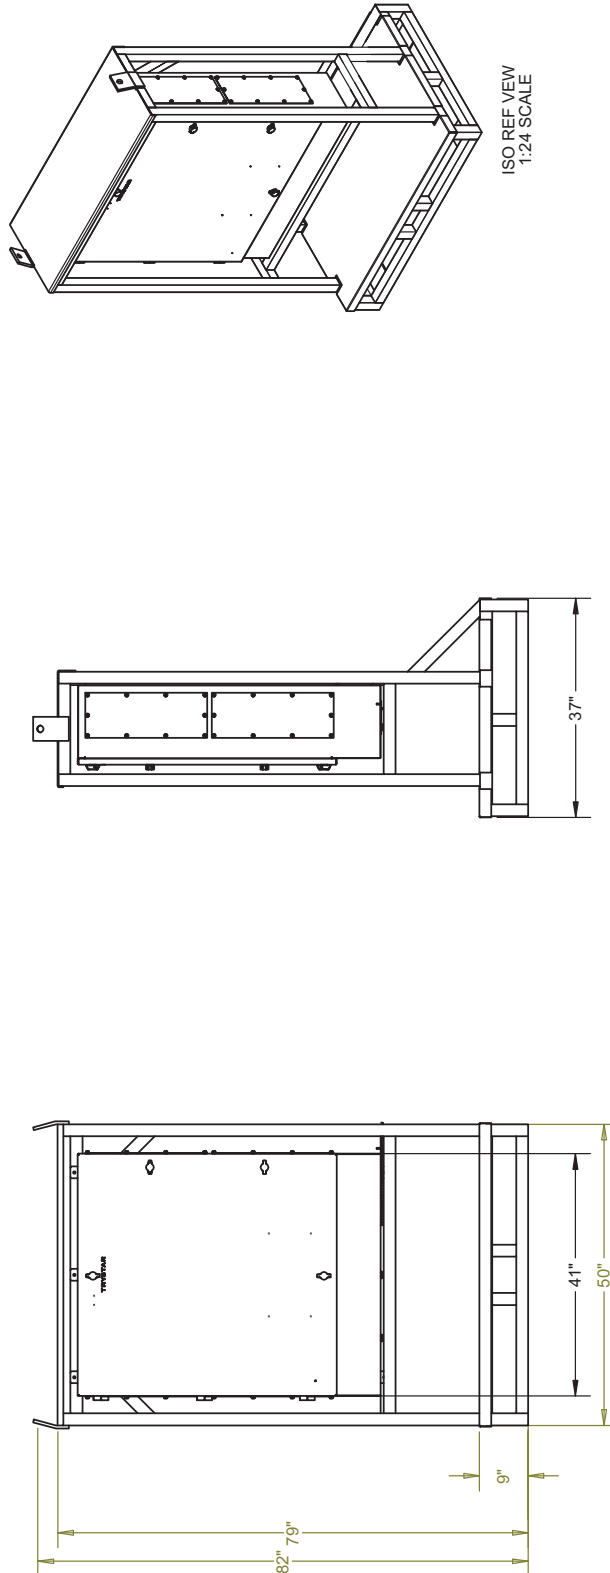


Vertical I-Line Panel 1200A

Figure 3. RSIP1200A I-Line panel (S0BN-S0BQ)

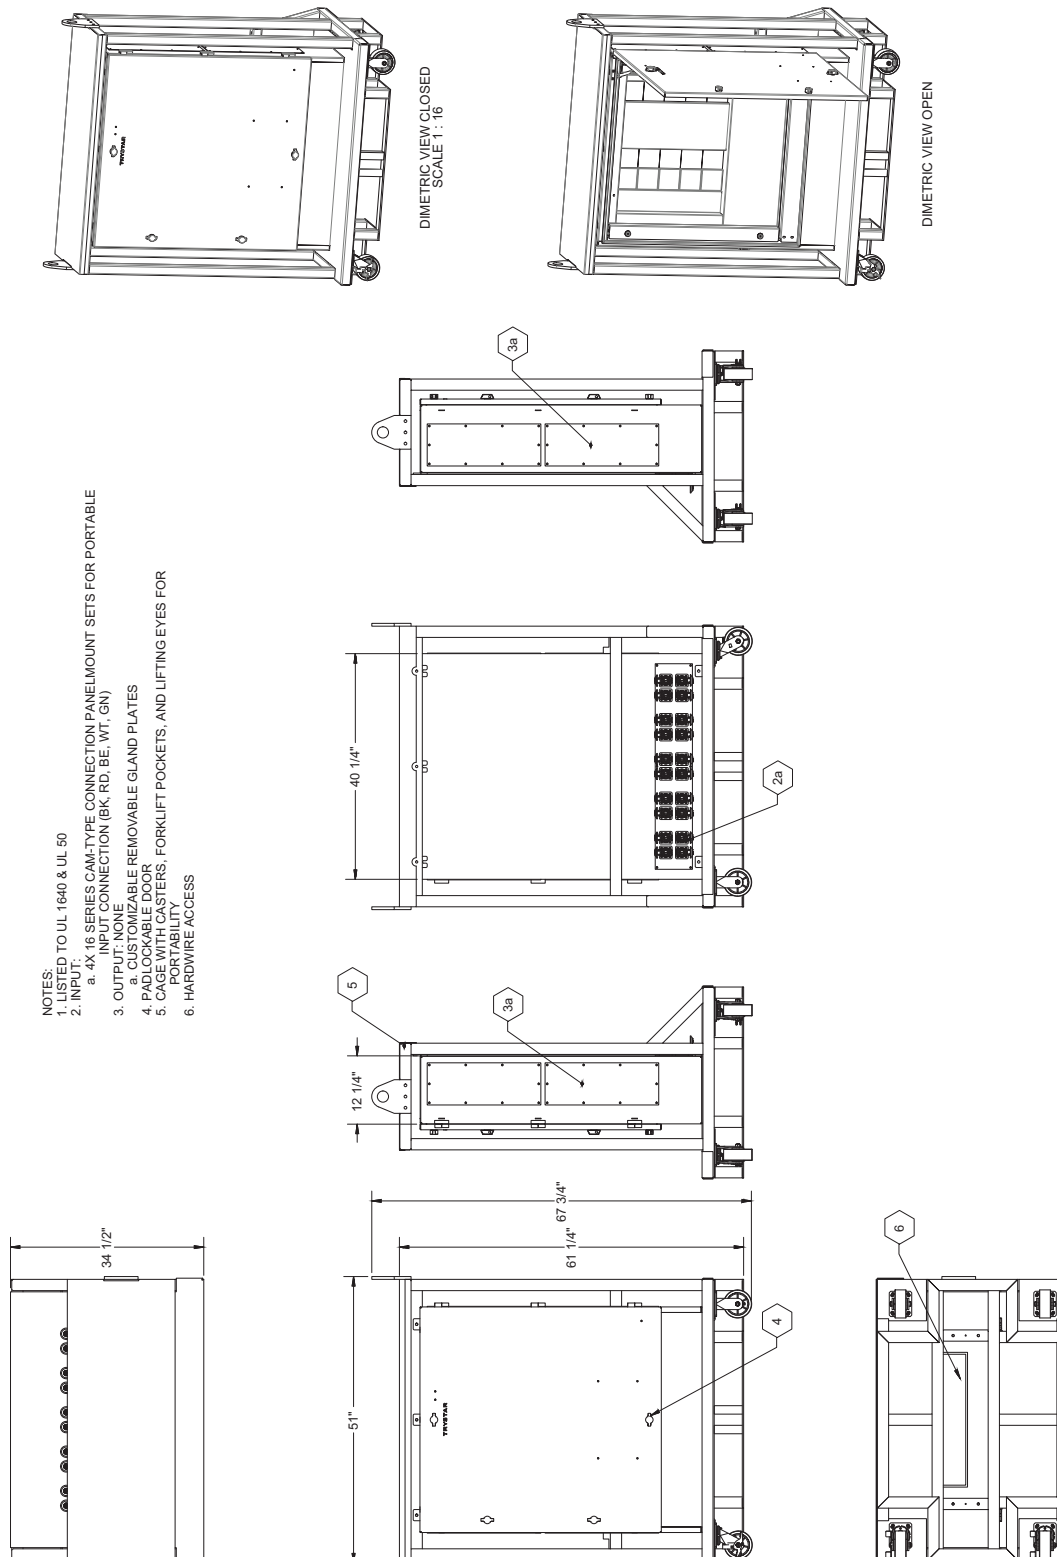


Vertical I-Line Panel 1200A

Figure 4. RSIP1200A I-Line panel (S0BR-S0DO)

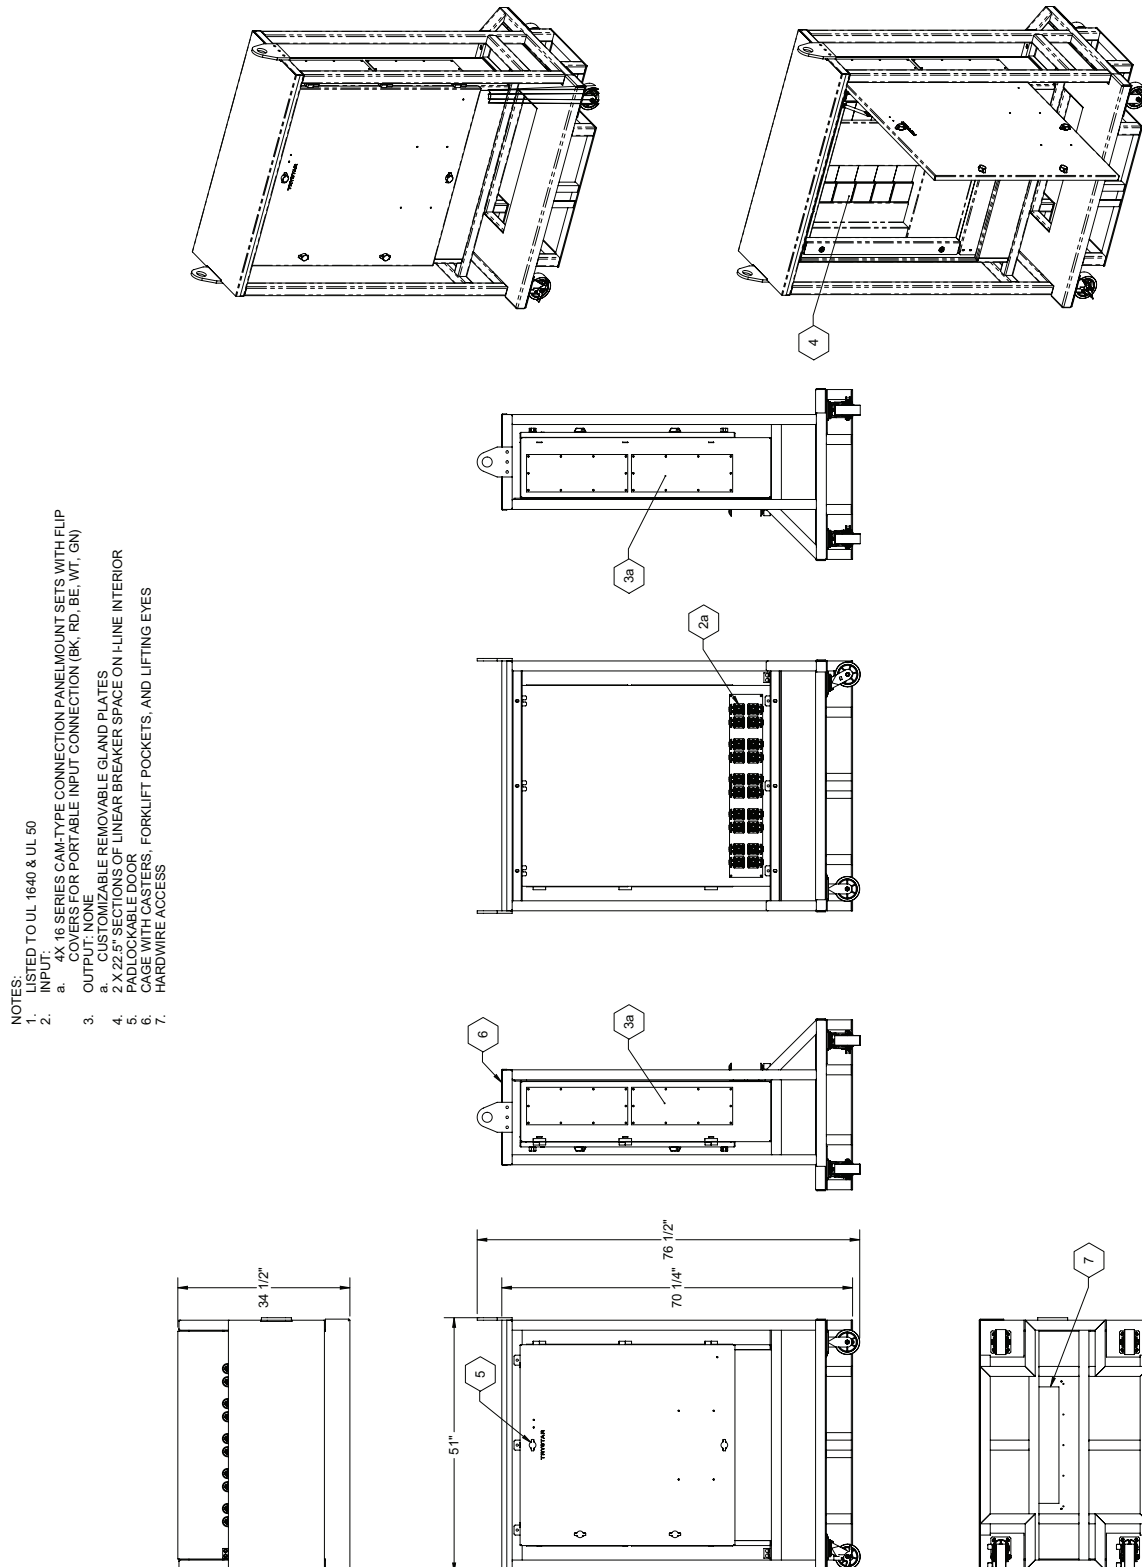


Vertical I-Line Panel 1200A

Figure 5. RSIP1200A I-Line panel (S0DP-S0DY)

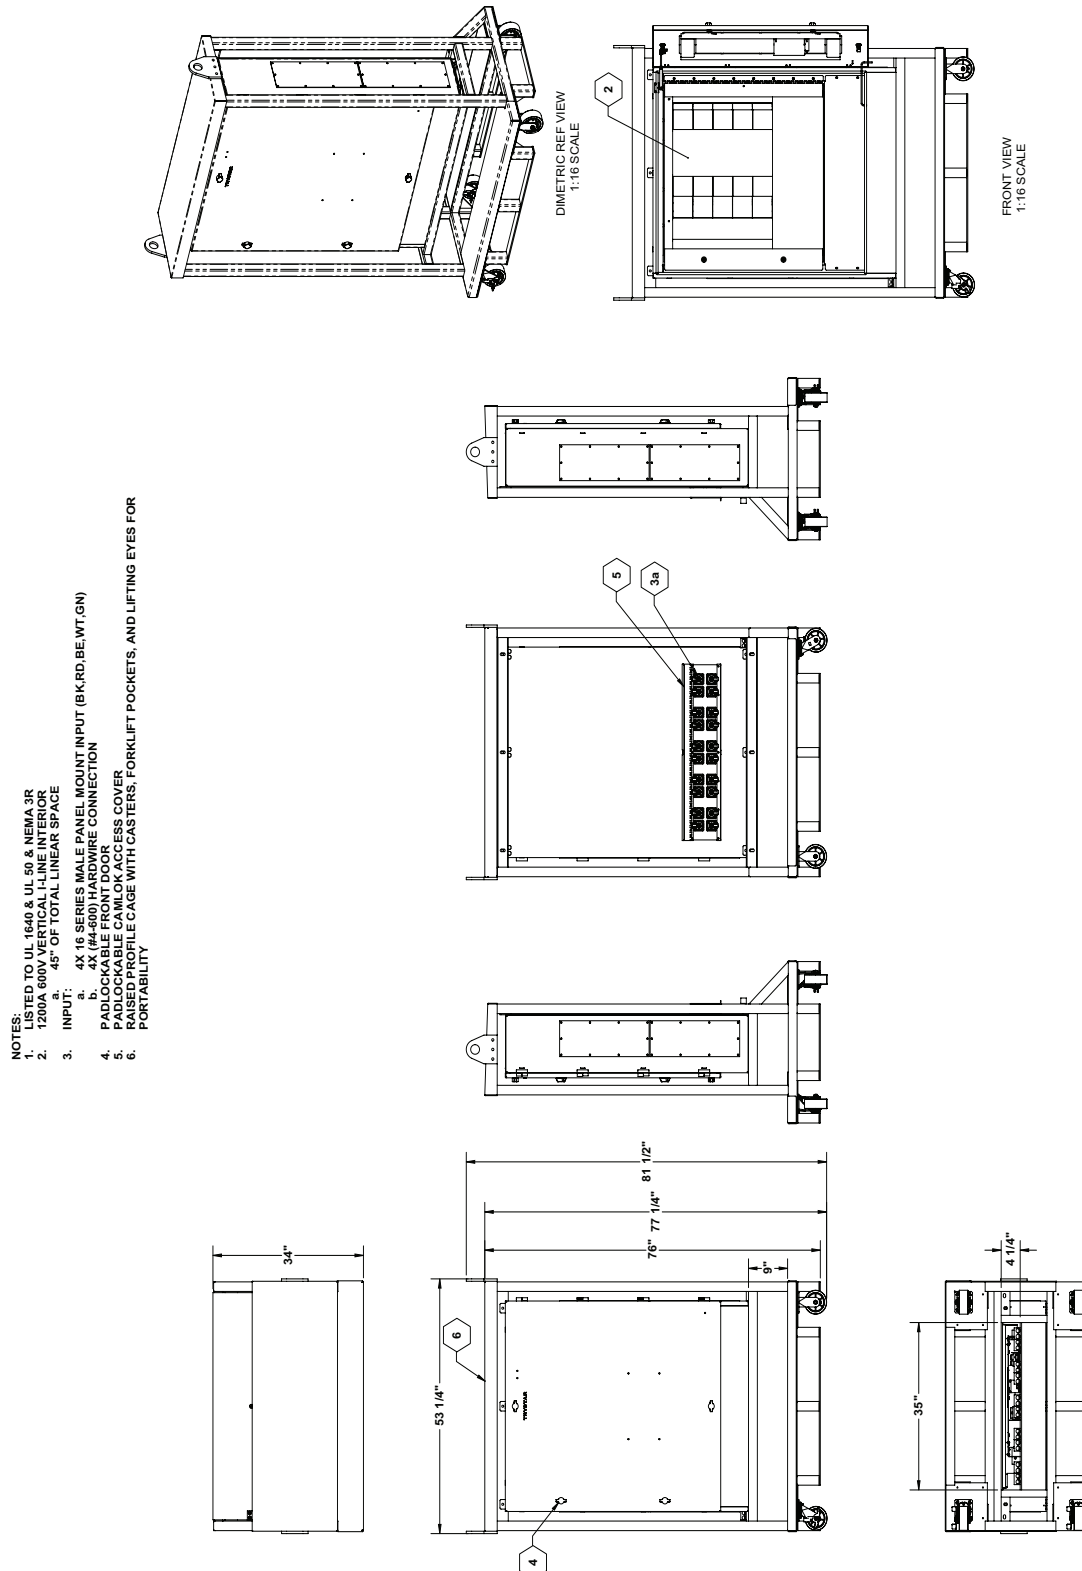

[illegible]

- NOTES:
1. LISTED TO UL 1640 & UL 50 & NEMA 3R
 1. 1200A 600V VERTICAL LINE IN PRIOR
 2. 45° OF TOTAL LINEAR SPACE
 3. INPUT:
 4. 4X 16 SERIES MALE PANEL MOUNT INPUT (B,K,R,D,BE,WT,G,N)
 5. R. 4X 16 SERIES FEMALE CONNECTION
 6. PADLOCKABLE FRONT DOOR
 7. PADLOCKABLE CAM/LOCK ACCESS COVER
 8. PADLOCKABLE CASE WITH CASTERS, FORKLIFT POCKETS, AND LIFTING EYES FOR PORTABILITY

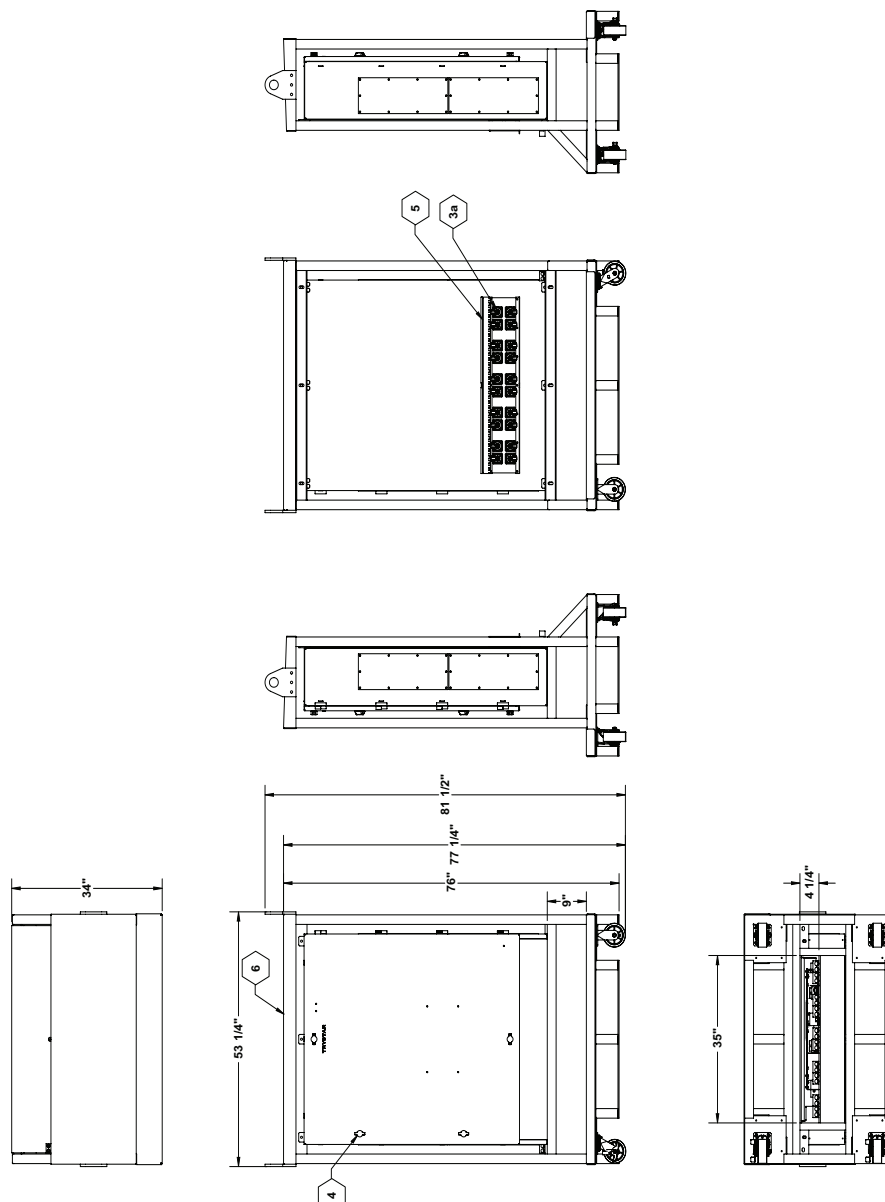



Vertical I-Line Panel 3000A

RSIP3000S0

General Information

- I-line interior rated for 600 V
- UL50 listed
- NEMA 3R
- 65 KAIC rating when using 65 KAIC-rated breakers
- Largest breaker size -1200 A¹

Features

- Corrosion-resistant aluminum construction
- Adaptable I-Line due to changeable gland plates
- Adaptable heavy-duty cage with lifting eyes and forklift pockets
- Metal casters with industrial grade floor locks²

Table 1. Input

Label	Value
Panel mount	Eight sets of 16 series cam-type connection
Hardwire access	Bottom conduit trap door
Wire size	Maximum 600 MCM (eight per phase)

Table 2. Output

Label	Value
Hardwire access	Bottom conduit trap door

Table 3. Dimensions and weights

Label	Value
Length	5 ft – 9 in.
Width	5 ft – 3 in.
Height	8 ft – 6 in.
Weight	2000 lb


Note: Actual weight and physical dimensions may vary.

¹ Panel cannot accommodate main breaker switch.

² Not applicable to all panels.

Vertical I-Line Panel 3000A

Figure 1. RSIP3000A I-Line panel

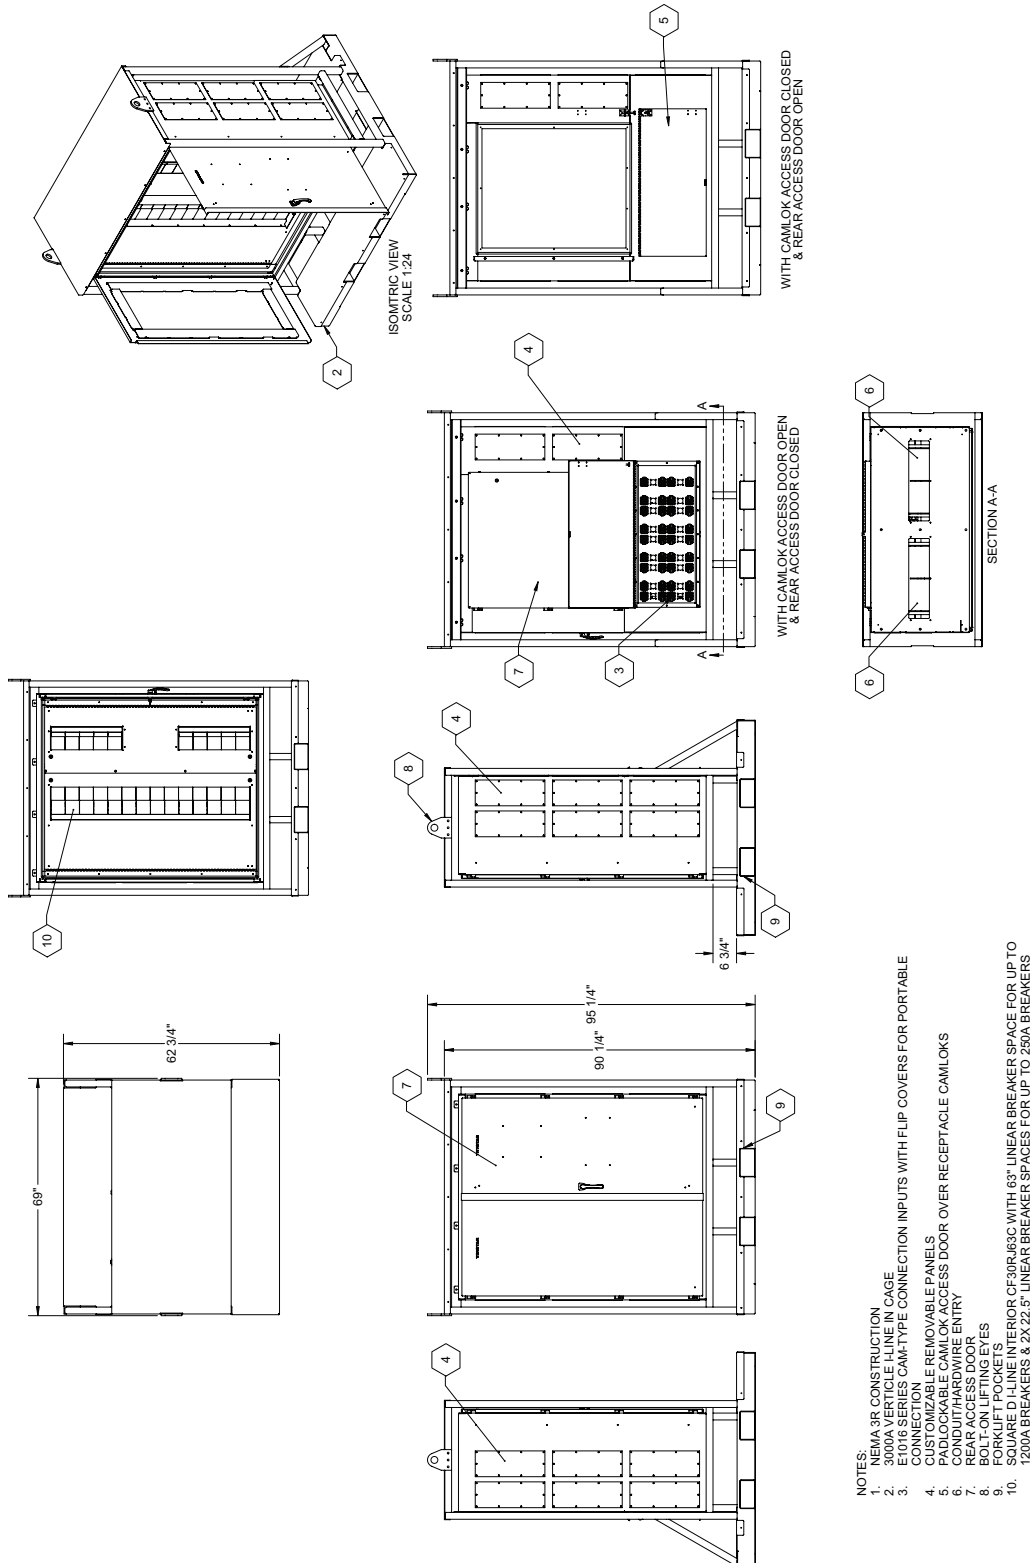



Breaker List

Trane Rental Services offer a variety of breaker types and sizes to be used in a wide range of applications. For more information, please contact Trane Rental Services.

Table 1. Trane rental services breakers

Type	Nominal size	Adjustable range
Adjustable	150	50, 60, 70, 80, 90, 100, 110, 125, 150
	250	70, 80, 100, 125, 150, 175, 200, 225, 250
	400	125, 150, 175, 200, 225, 250, 300, 350, 400
	600	200, 225, 250, 300, 350, 400, 450, 500, 600
	800	250, 300, 350, 400, 450, 500, 600, 700, 800
	1200	300, 350, 400, 450, 500, 600, 700, 800, 1000, 1200
Non-adjustable	20, 30, 40, 50, 60, 80, 100, 125, 150, 200, 225, 250, 400, 600, 800	



Notes

Trane - by Trane Technologies (NYSE: TT), a global climate innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit trane.com or tranetechnologies.com.

Trane has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.