

80 Ton Industrial High Static DX Unit

Rental Services





General - RSHX0080	
Nominal Tons	80
Refrigerant	R410A
Refrigerant Charge (Ckt1/Ckt2)	60 lbs/60 lbs
Ambient Operating Conditions	0°F - 105°F
Number of Electrical Circuits	1
Number of Refrigerant Circuits	2
Number of Compressors per Circuit	1
Air Flow Data	
Supply Motor	30 HP
Nominal CFM	12,800
Min/Max CFM	4,200 - 17,000
ESP @ Nominal CFM	4.6"
Supply Air Connection Qty/Size	(3) 20"
Return Air Connection Qty/Size	(4) 20"
MERV-8 Throwaway Filters	(8) 16" x 25" x 2"
Electrical Data - Circuit Breaker Style Disconnect	
Voltage	460V 3 Phase
Frequency	60Hz
Wire Connection Type	Series 16 Cam Type Only
SCCR	5000A
Electric Heater kW	162kW (Three Stages: 54kW Each)
Minimum Circuit Ampacity (MCA)	329A
Maximum Overcurrent Protection (MOP)	400A
Cooling Only FLA	147.1A
Heating FLA	237.7A
Cooling + Reheat FLA	282.7A
Certification	ETL, UL 1995 & CSA STD C22.2 No. 236



Features


- Hot Gas Bypass
- Cam Type Electrical Connections
- Electric Heat w/ Reheat (Dehumidification) Option
- Hydrophilic Condenser and Evaporator Coils
- Phase Monitor
- Stainless Steel Drain Pan
- Remote Wireless Thermostat (available upon request)
- Run Hour Meter
- 120V 6 Amp GFCI Convenience Outlet
- Supply and Condenser Fan VFD's w/ Bypass

30 HP Supply Fan Curve

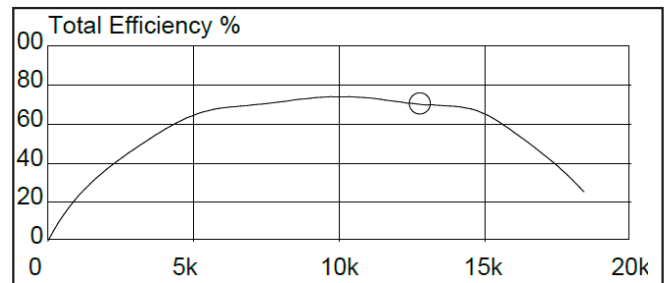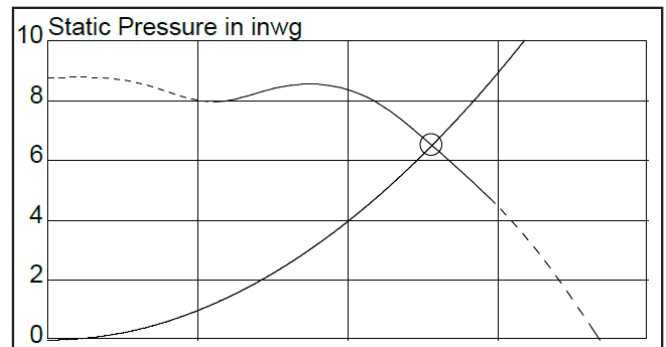

Dimension and Weights

Length	13' 0"
Width	7' 4"
Height	8' 4"
Shipping Weight	9,800 lbs
Fork Pocket Dimensions	12" x 4 3/4"
Center to Center Distance of Fork Pockets	48"
Lifting Device	Forklift or Crane

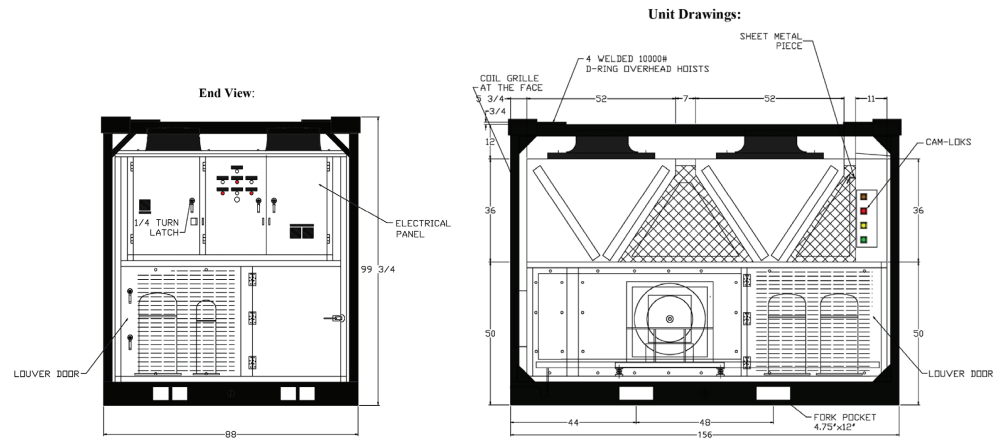

24hr Trane Rental
Customer Service:
800-755-5115



Trane – by Trane Technologies (NYSE: TT), a global climate innovator – creates comfortable, energy efficient indoor environments through a broad portfolio of heating, ventilating and air conditioning systems and controls, services, parts and supply. For more information, please visit trane.com or tranetechnologies.com.

All trademarks referenced in this document are the trademarks of their respective owners.

© 2021 Trane. All Rights Reserved.

TEMP-SLB001-EN
06/01/2021