
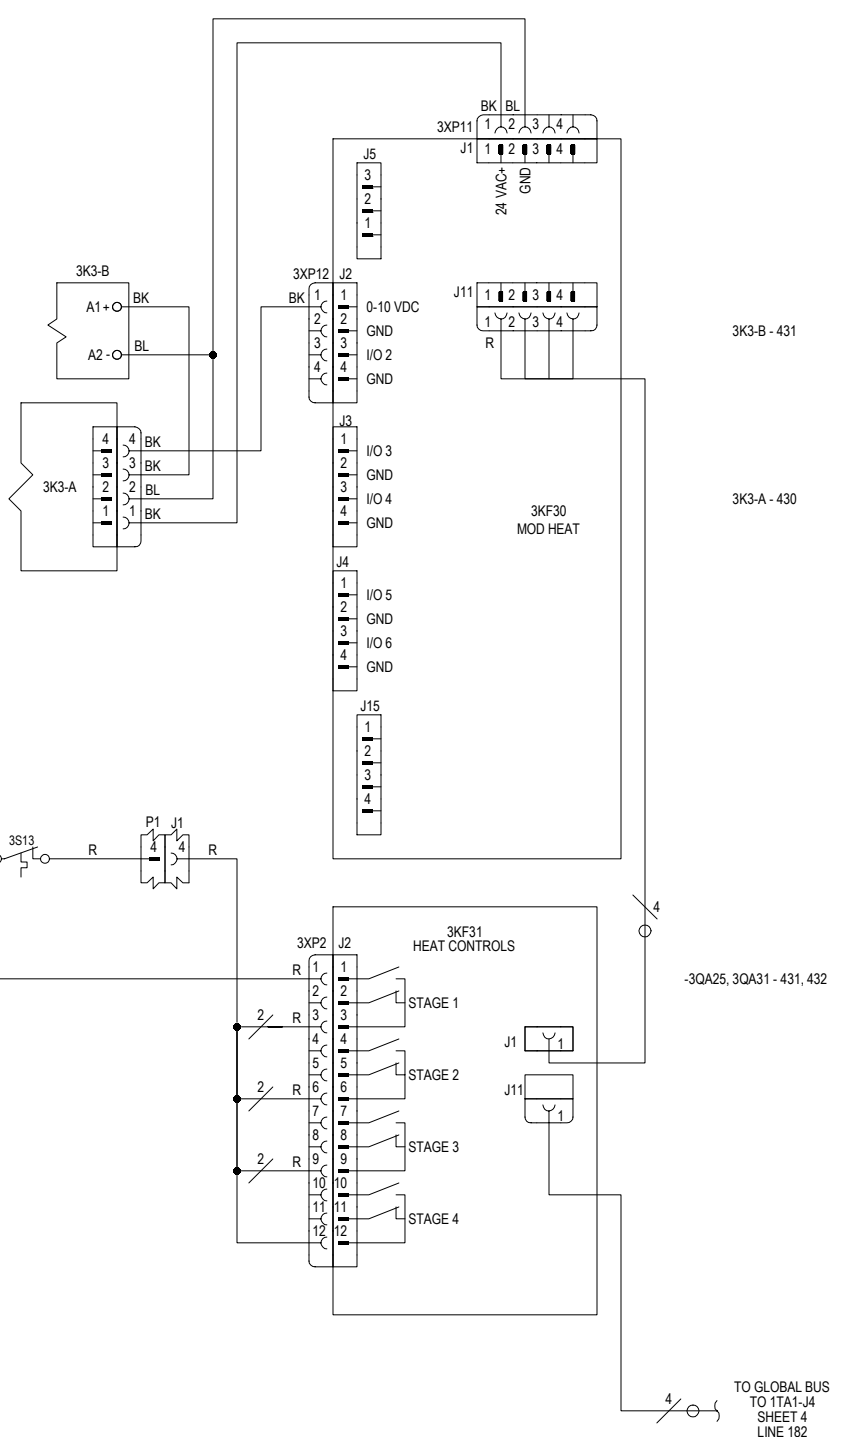
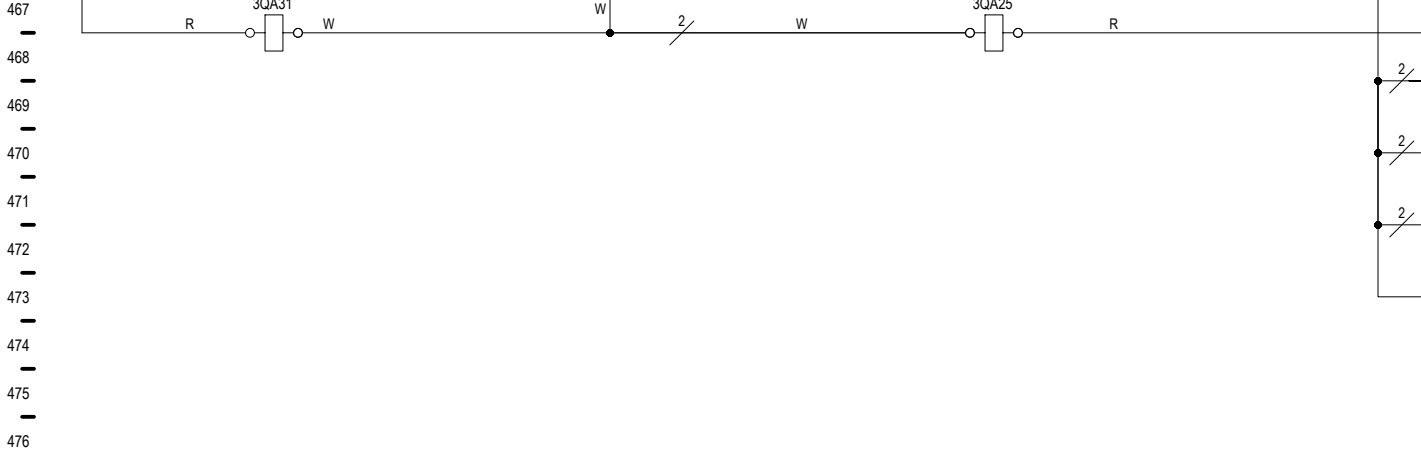
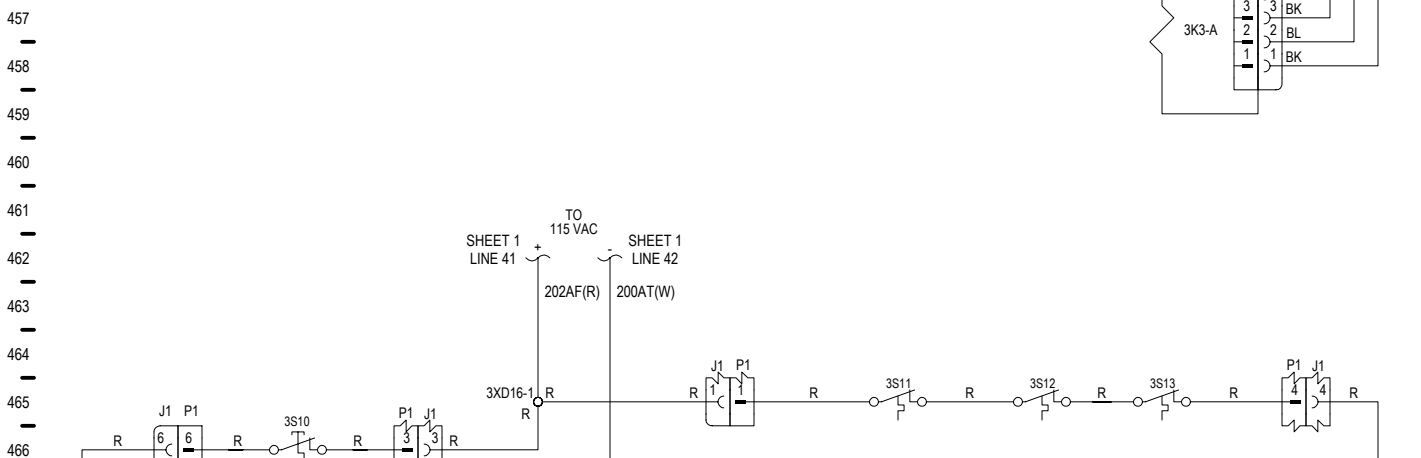


WIRE COLOR ABBREVIATION CODES			
CODE	COLOR	CODE	COLOR
BK	BLACK	PK	PINK
BL	BLUE	R	RED
BR	BROWN	TQ	TURQUOISE
G	GREEN	V.(PR)	PURPLE
GY	GREY	W	WHITE
O	ORANGE	Y	YELLOW

LEGEND		
REF DES	DESCRIPTION	LINE NO
1XD3	TERMINAL BLOCK	428
3E6	HEAT ELEMENT - WYE - CKT A	434
3F20	FUSE BLOCK	434
3K3-A	SCR RELAY - POWER SWITCH	433
3K3-A	SCR RELAY - PRIMARY CONTROL	456
3K3-B	SCR RELAY - SECONDARY CONTROL	454
3K3-B	SCR RELAY - POWER SWITCH	434
3KF30	LLID (HEX) - MOD HEAT CONTROLS	451
3KF31	HEAT CONTROLS	467
3QA25	CONTACTOR - HEAT CIRCUIT A	434
3QA25	CONTACTOR - HEAT CIRCUIT A	467
3QA31	CONTACTOR - BACK-UP	434
3QA31	CONTACTOR - BACK-UP	467
3QB4	MANUAL DISCONNECT - ELEC HEAT	424
3S10	HIGH TEMP LIMIT - MANUAL RESET	466
3S11	HIGH TEMP LIMIT - AUTO RESET #1	465
3S12	HIGH TEMP LIMIT - AUTO RESET #2	465
3S13	HIGH TEMP LIMIT - AUTO RESET #3	465
3XD5	TERMINAL BLOCK	428
3XD16	TERM BLOCK - 115 VAC	465
3XD17	TERM BLOCK - 115 VAC COM	466
3XD20	TERMINAL BLOCK	434
GLC	EARTH GROUND TO CHASSIS	423

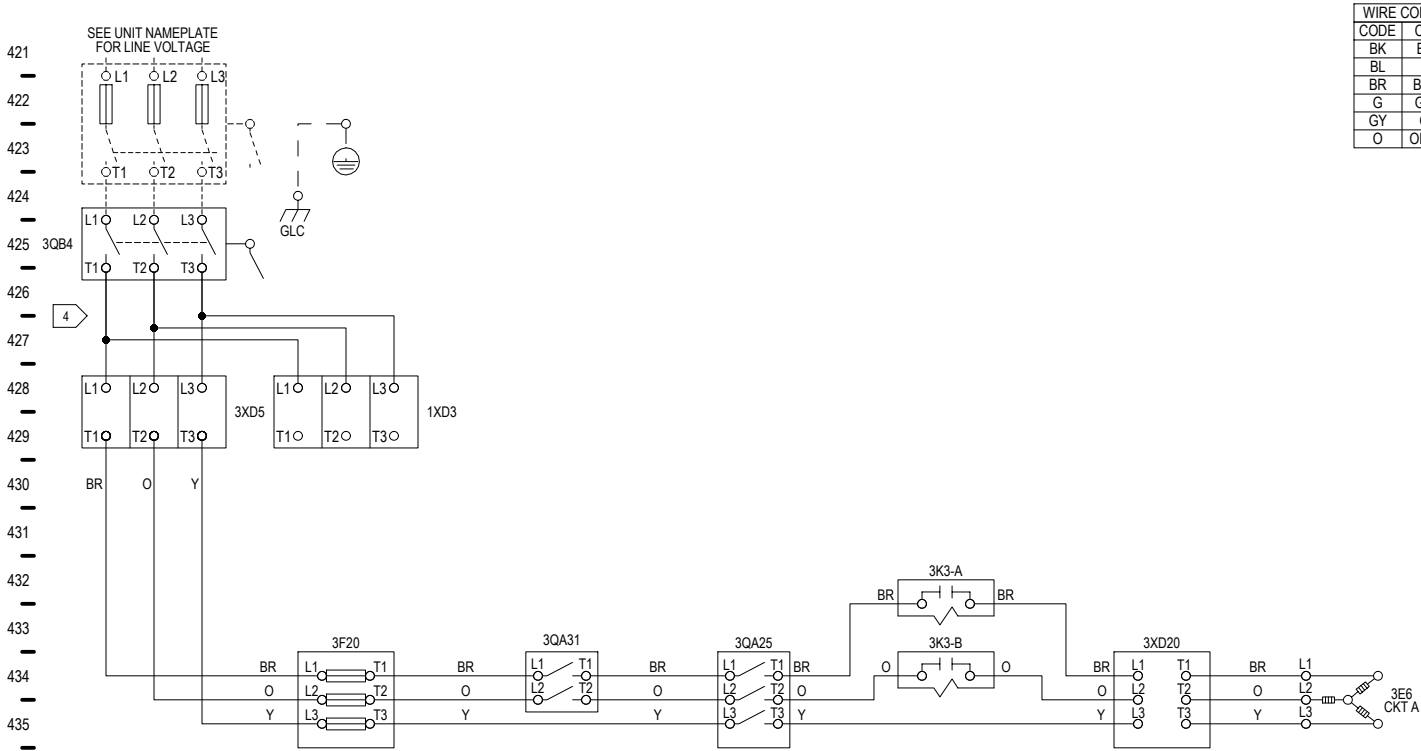

NOTES: SEE SHEET 1 FOR STANDARD NOTES 1-2 THAT APPLY TO ALL SHEETS.

3. NUMBERS ALONG THE RIGHT SIDE MARGIN OF THE SCHEMATIC DESIGNATE BY LINE NUMBER THE LOCATION OF CONTACTS ENERGIZED BY COIL. AN UNDERLINED NUMBER INDICATES A NORMALLY CLOSED CONTACT. AN OPEN ARROWHEAD POINTING UPWARD BELOW THE LINE NUMBER INDICATES A TIMED CONTACT WHICH BEGINS TIMING WHEN ENERGIZED.

4. TRANE PROVIDES 1XD3, 2QB1/2XD1 AND WIRES (BR), (O), AND (Y) TO 3XD5 FOR 460V APPLICATIONS ONLY.

DESIGNER:	T. PEED
ENGINEER:	E. CAROTA
TRANE © DATE:	4/19/2024
REPLACES:	
SIMILAR TO:	
REVISION DATE:	4/19/2024
REVISED BY:	T. PEED
APPROVED BY:	
CAD SYSTEM USED:	CREO SCHEMATICS

TRANE®

THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF TRANE.

INTELLIPAK 3 SCHEMATIC			
ELECTRIC HEAT WITH SCR MODULATING 30KW - 480V			
MASTER NUMBER:	DRAWING NUMBER:	SHEET:	REV
	12132842	8	B