
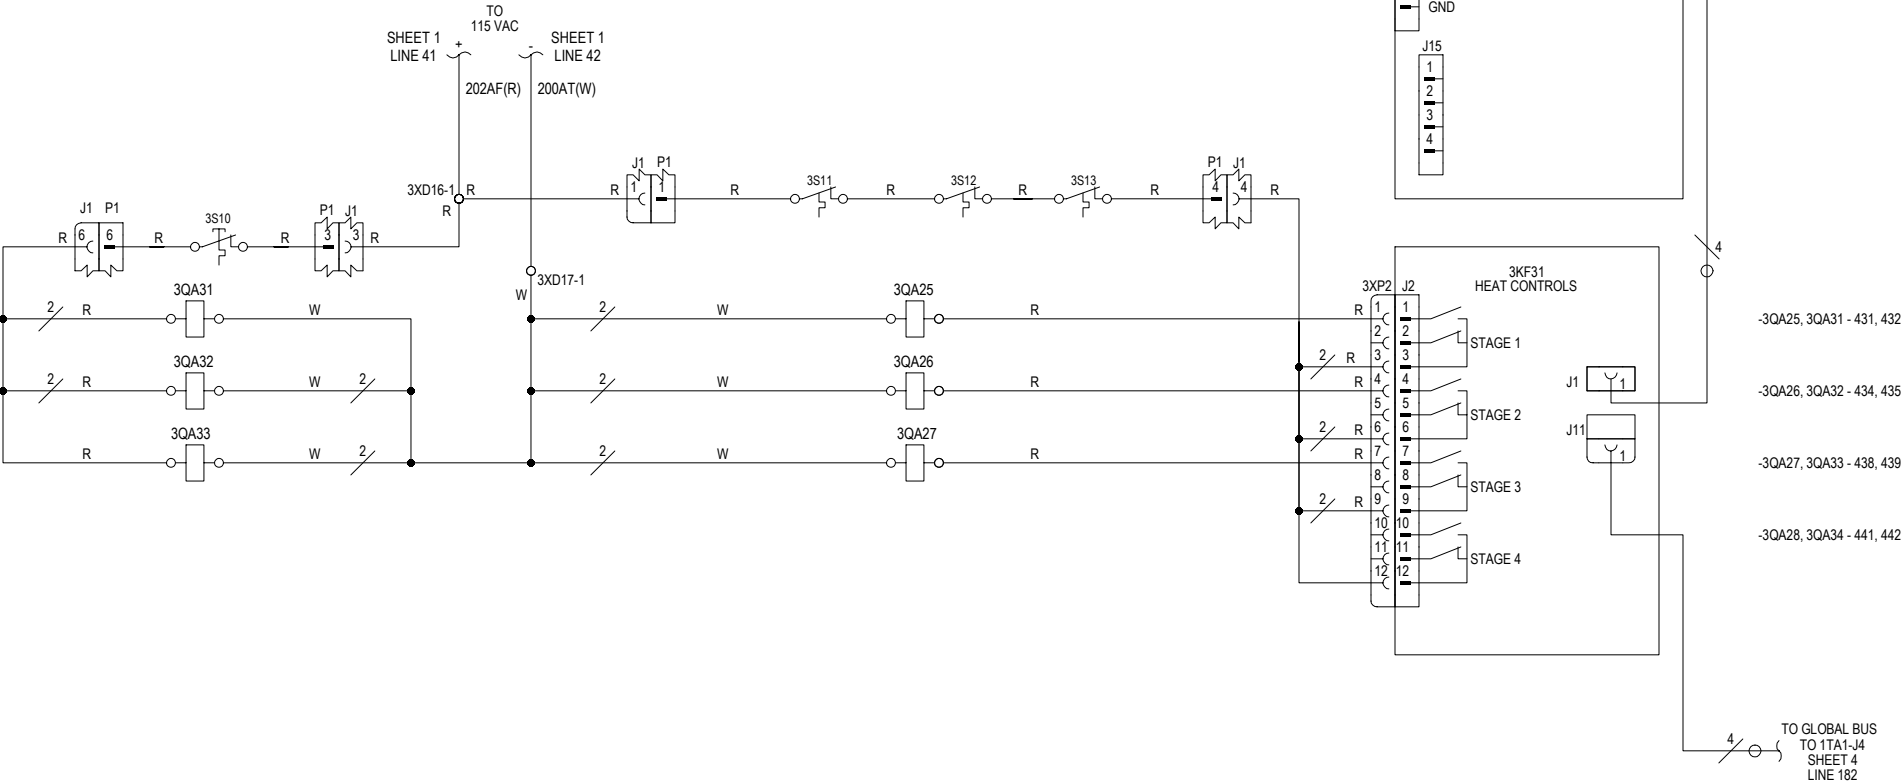
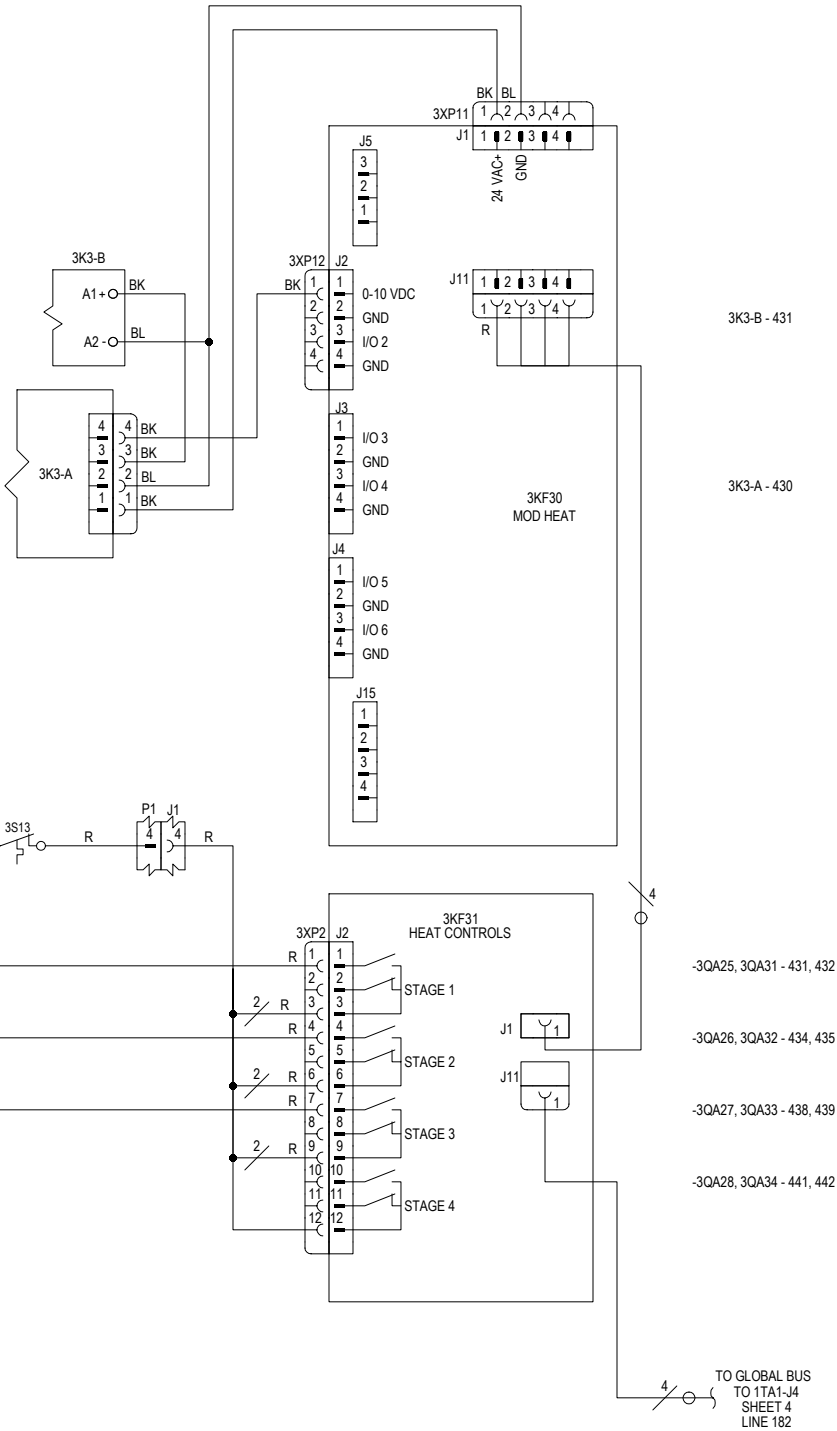


421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480

WIRE COLOR ABBREVIATION CODES			
CODE	COLOR	CODE	COLOR
BK	BLACK	PK	PINK
BL	BLUE	R	RED
BR	BROWN	TQ	TURQUOISE
G	GREEN	V.(PR)	PURPLE
GY	GREY	W	WHITE
O	ORANGE	Y	YELLOW

LEGEND		
REF DES	DESCRIPTION	LINE NO
1XD3	TERMINAL BLOCK	428
2QB1/2XD1	MANUAL DISCONNECT - ELEC HEAT	425
3E6	HEAT ELEMENT - WYE - CKT A	436
3E6	HEAT ELEMENT - WYE - CKT B	439
3E6	HEAT ELEMENT - WYE - CKT C	443
3F20	FUSE BLOCK	436
3F21	FUSE BLOCK	439
3F22	FUSE BLOCK	443
3K3-A	SCR RELAY - POWER SWITCH	434
3K3-A	SCR RELAY - PRIMARY CONTROL	456
3K3-B	SCR RELAY - POWER SWITCH	436
3K3-B	SCR RELAY - SECONDARY CONTROL	454
3KF30	LLID (HEX) - MOD HEAT CONTROLS	451
3KF31	HEAT CONTROLS	467
3QA25	CONTACTOR - HEAT CIRCUIT A	436
3QA25	CONTACTOR - HEAT CIRCUIT A	467
3QA26	CONTACTOR - HEAT CIRCUIT B	469
3QA26	CONTACTOR - HEAT CIRCUIT B	439
3QA27	CONTACTOR - HEAT CIRCUIT C	443
3QA27	CONTACTOR - HEAT CIRCUIT C	470
3QA31	CONTACTOR - BACK-UP	467
3QA31	CONTACTOR - BACK-UP	436
3QA32	CONTACTOR - BACK-UP	439
3QA32	CONTACTOR - BACK-UP	469
3QA33	CONTACTOR - BACK-UP	443
3QA33	CONTACTOR - BACK-UP	470
3S10	HIGH TEMP LIMIT - MANUAL RESET	466
3S11	HIGH TEMP LIMIT - AUTO RESET #1	465
3S12	HIGH TEMP LIMIT - AUTO RESET #2	465
3S13	HIGH TEMP LIMIT - AUTO RESET #3	465
3XD5	TERMINAL BLOCK	428
3XD16	TERM BLOCK - 115 VAC	465
3XD17	TERM BLOCK - 115 VAC COM	466
3XD20	TERMINAL BLOCK	436
GLC	EARTH GROUND CHASSIS	423

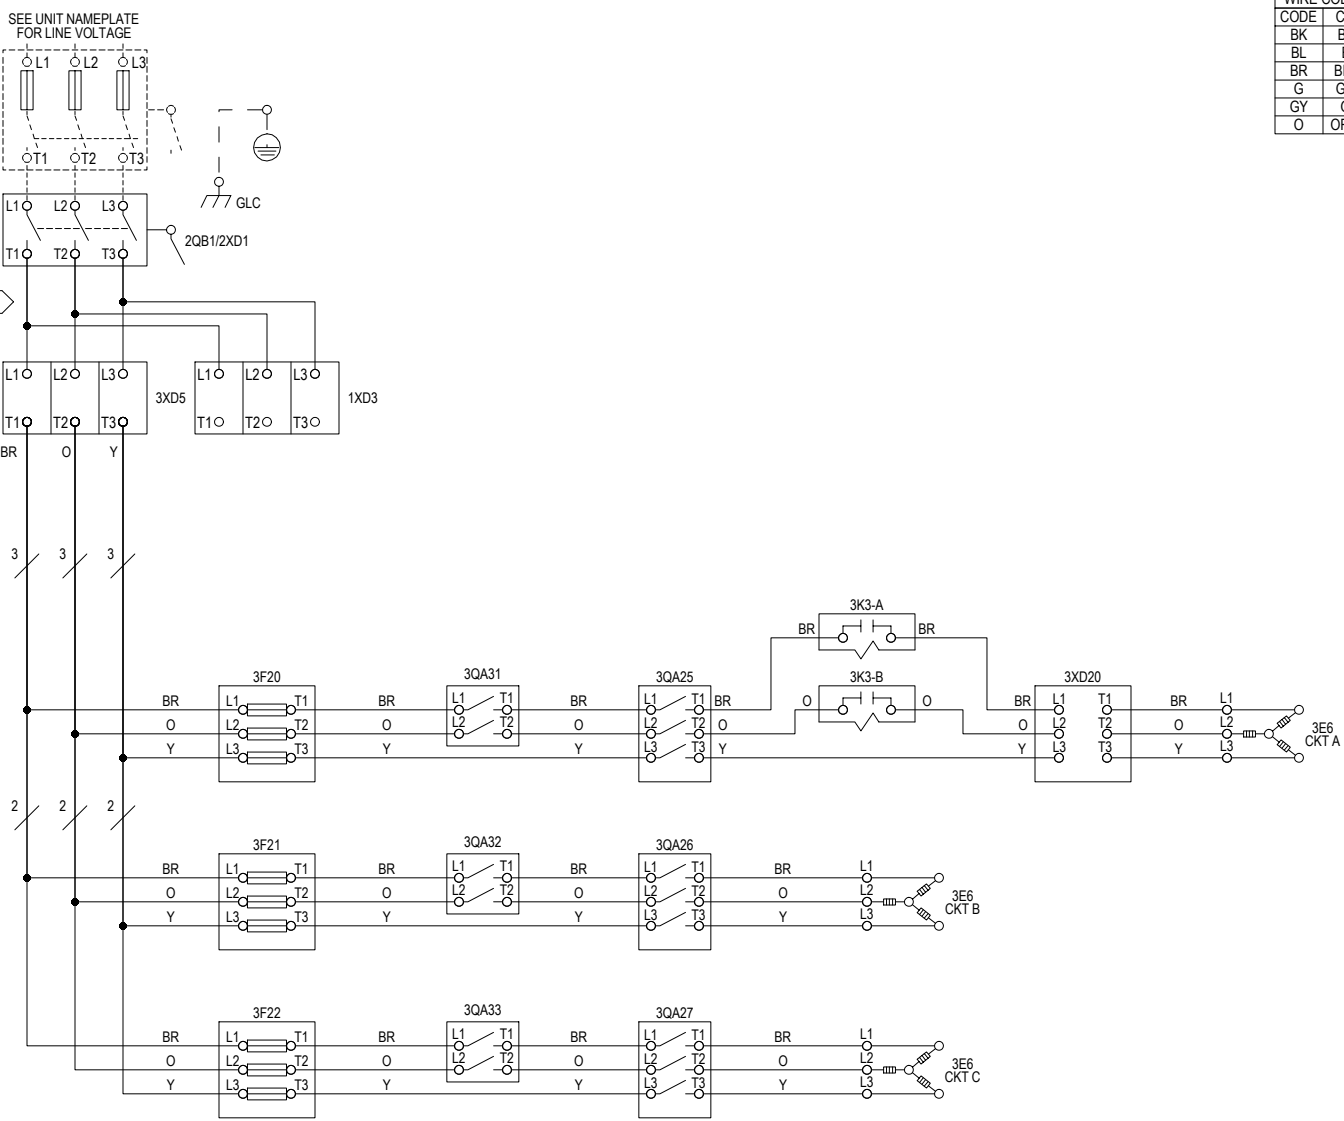

- NOTES: SEE SHEET 1 FOR STANDARD NOTES 1-2 THAT APPLY TO ALL SHEETS.
3. NUMBERS ALONG THE RIGHT SIDE MARGIN OF THE SCHEMATIC DESIGNATE BY LINE NUMBER THE LOCATION OF CONTACTS ENERGIZED BY COIL. AN UNDERLINED NUMBER INDICATES A NORMALLY CLOSED CONTACT. AN OPEN ARROWHEAD POINTING UPWARD BELOW THE LINE NUMBER INDICATES A TIMED CONTACT WHICH BEGINS TIMING WHEN ENERGIZED.
4. TRANE PROVIDES 1XD3, 2QB1/2XD1 AND WIRES (BR), (O), AND (Y) TO 3XD5 FOR 460V APPLICATIONS

DESIGNER:	T. PEED
ENGINEER:	E. CAROTA
TRANE © DATE:	4/19/2024
REPLACES:	
SIMILAR TO:	
REVISION DATE:	4/19/2024
REVISED BY:	T. PEED
APPROVED BY:	
CAD SYSTEM USED:	CREO SCHEMATICS

TRANE® THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF TRANE.			
INTELLIPAK 3 SCHEMATIC ELECTRIC HEAT WITH SCR MODULATING 90KW - 480V			
MASTER NUMBER:	DRAWING NUMBER:	SHEET:	REV
	12132846	8	B