


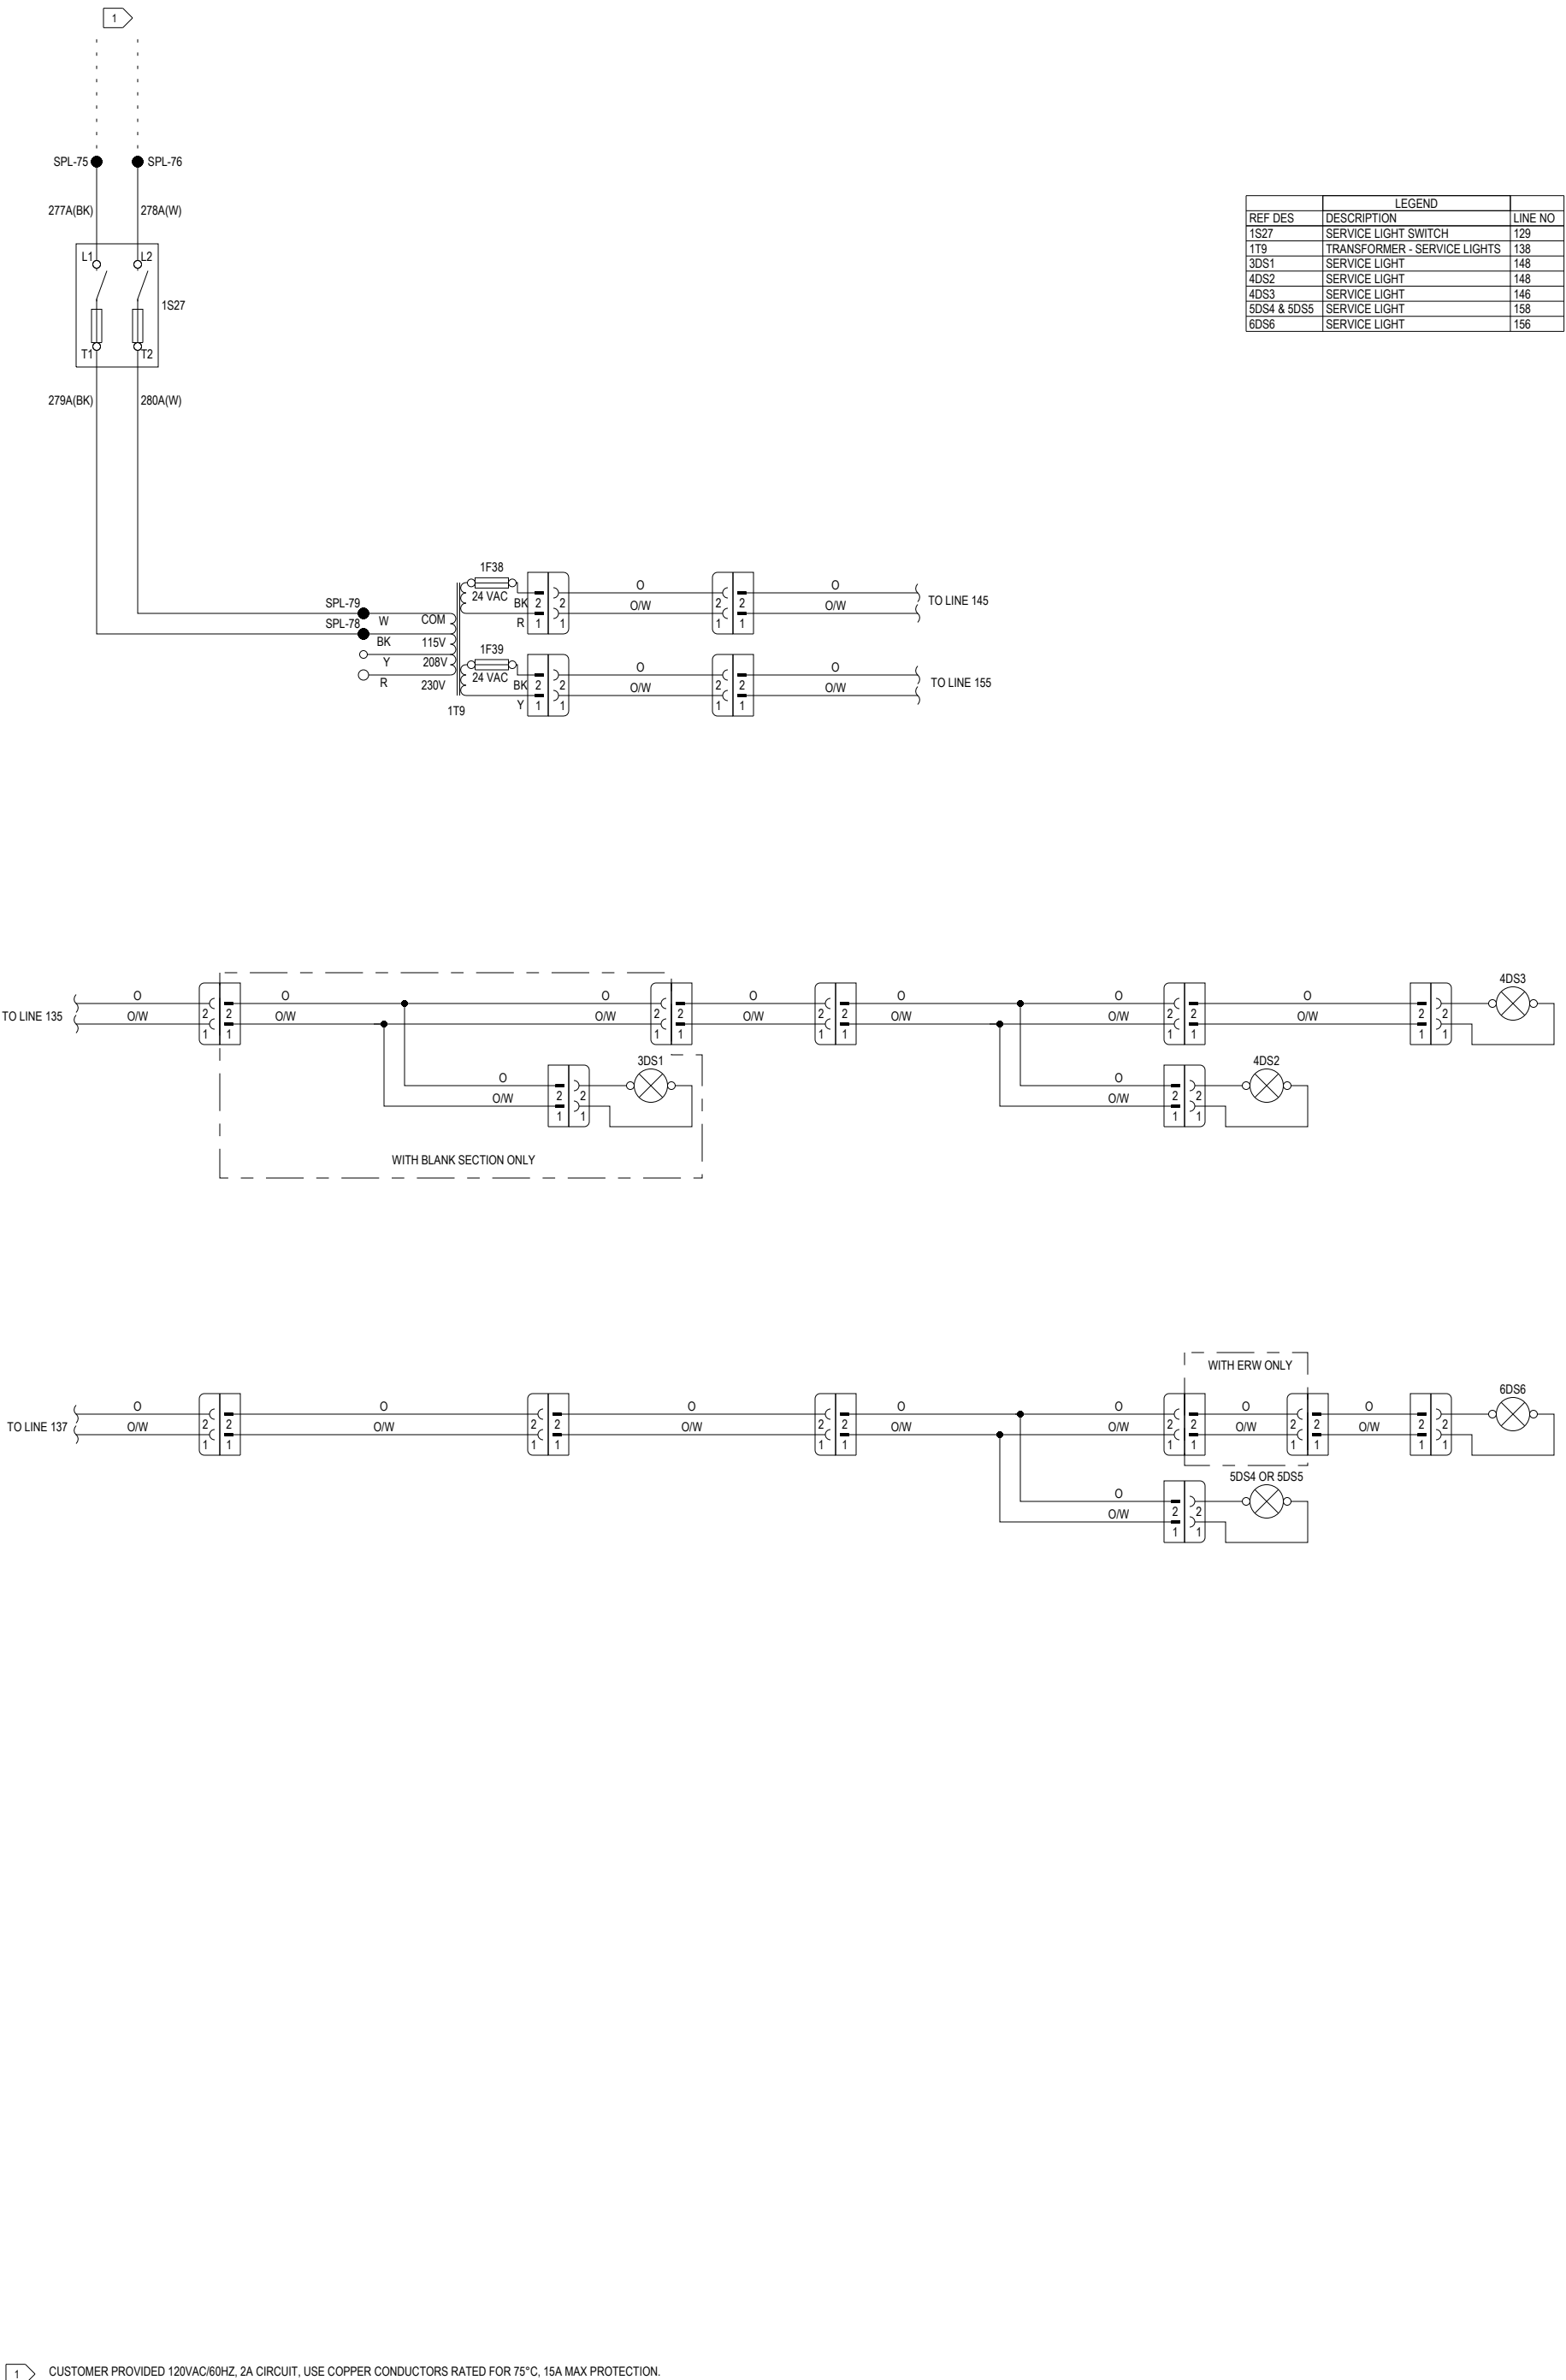

1 CUSTOMER PROVIDED 120VAC/60HZ, 2A CIRCUIT, USE COPPER CONDUCTORS RATED FOR 75°C, 15A MAX PROTECTION.