


74—
75—
76—
77—
78—
79—
80—
81—
82—
83—
84—
85—
86—
87—
88—
89—
90—
91—
92—
93—
94—
95—
96—
97—
98—
99—
100—
101—
102—
103—
104—
105—
106—
107—
108—
109—
110—
111—
112—
113—
114—
115—
116—
117—
118—
119—
120—
121—
122—
123—
124—
125—
126—
127—
128—
129—
130—
131—
132—
133—
134—
135—
136—
137—
138—
139—
140—
141—
142—
143—
144—
145—
146—

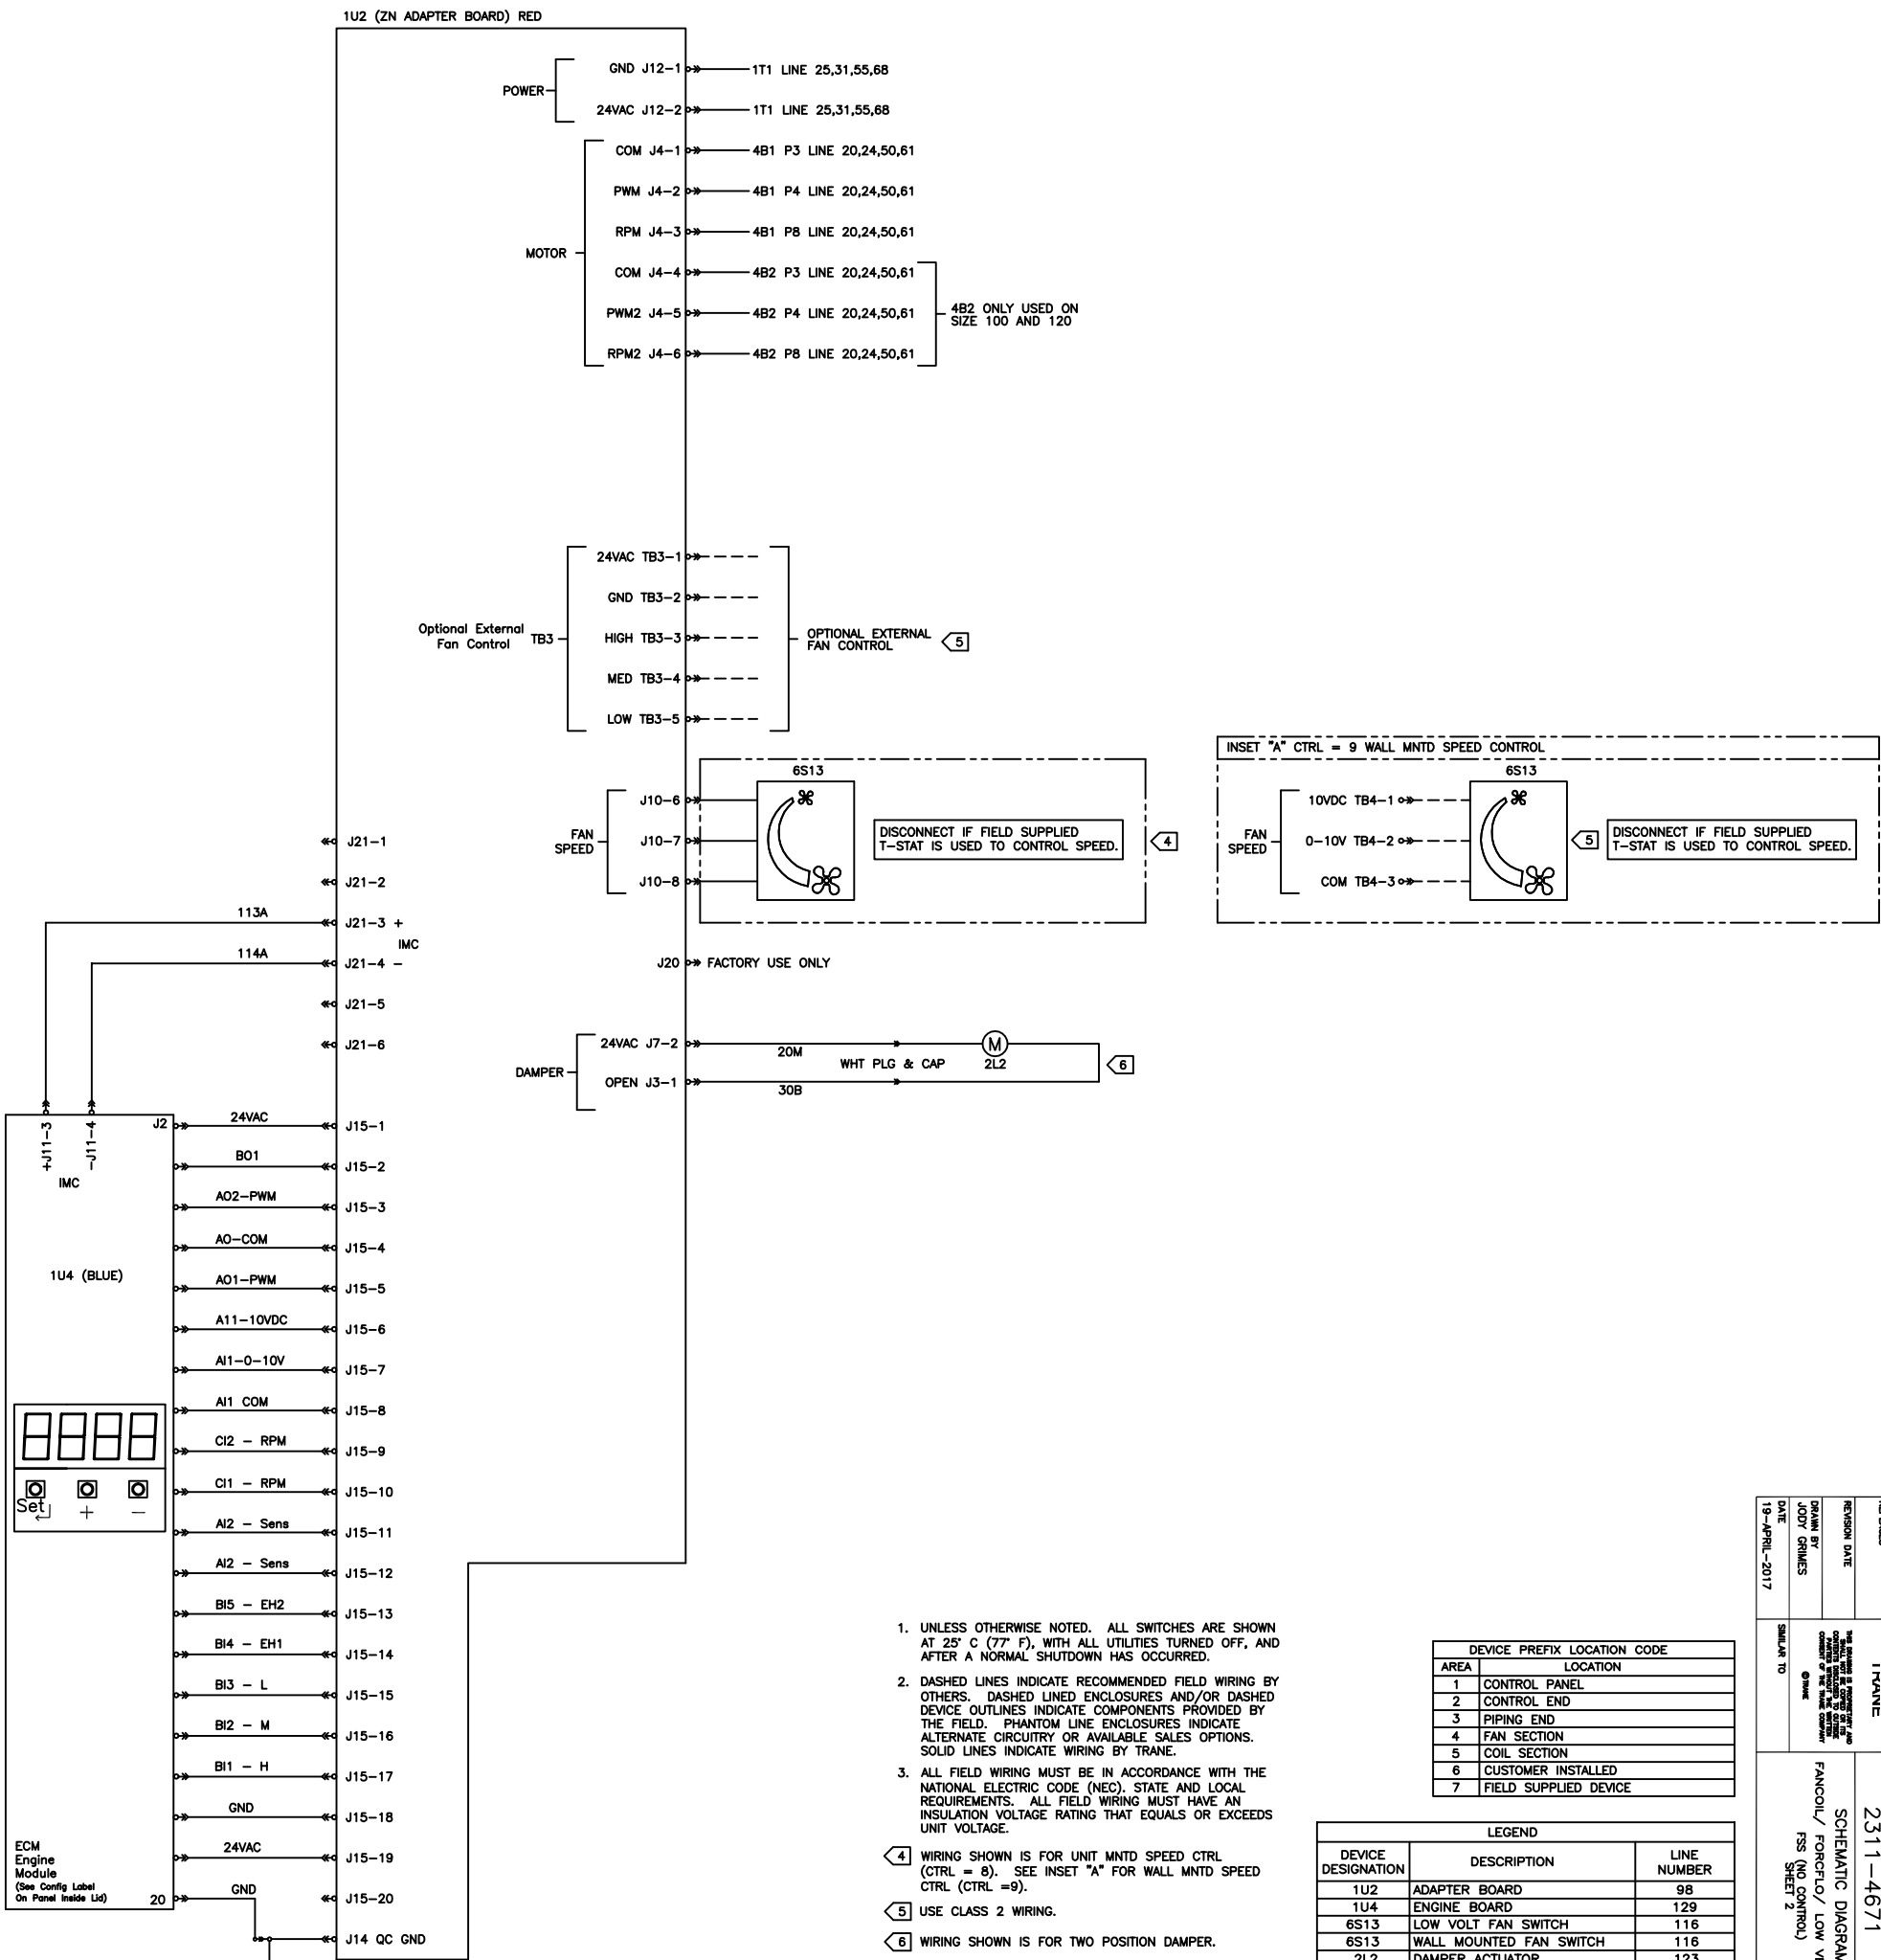

1. UNLESS OTHERWISE NOTED. ALL SWITCHES ARE SHOWN AT 25° C (77° F), WITH ALL UTILITIES TURNED OFF, AND AFTER A NORMAL SHUTDOWN HAS OCCURRED.
 2. DASHED LINES INDICATE RECOMMENDED FIELD WIRING BY OTHERS. DASHED LINED ENCLOSURES AND/OR DASHED DEVICE OUTLINES INDICATE COMPONENTS PROVIDED BY THE FIELD. PHANTOM LINE ENCLOSURES INDICATE ALTERNATE CIRCUITRY OR AVAILABLE SALES OPTIONS. SOLID LINES INDICATE WIRING BY TRANE.
 3. ALL FIELD WIRING MUST BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE (NEC), STATE AND LOCAL REQUIREMENTS. ALL FIELD WIRING MUST HAVE AN INSULATION VOLTAGE RATING THAT EQUALS OR EXCEEDS UNIT VOLTAGE.
- 4 WIRING SHOWN IS FOR UNIT MNTD SPEED CTRL (CTRL = 8). SEE INSET "A" FOR WALL MNTD SPEED CTRL (CTRL = 9).
- 5 USE CLASS 2 WIRING.
- 6 WIRING SHOWN IS FOR TWO POSITION DAMPER.

DEVICE PREFIX LOCATION CODE	
AREA	LOCATION
1	CONTROL PANEL
2	CONTROL END
3	PIPING END
4	FAN SECTION
5	COIL SECTION
6	CUSTOMER INSTALLED
7	FIELD SUPPLIED DEVICE

LEGEND		
DEVICE DESIGNATION	DESCRIPTION	LINE NUMBER
1U2	ADAPTER BOARD	98
1U4	ENGINE BOARD	129
6S13	LOW VOLT FAN SWITCH	116
6S13	WALL MOUNTED FAN SWITCH	116
2L2	DAMPER ACTUATOR	123

REPLACES	I/P NAME	2311-4671	REV	A
REVISION DATE	THE DESIGNER IS PROVIDING THIS AND THE INFORMATION CONTAINED HEREIN AS A GUIDE TO THE CONTRACTOR OF THE TRADE COMPANY © INMATE	SCHEMATIC DIAGRAM FANCOIL/ FORC-FLO/ LOW VERTICAL FSS (NO CONTROL) SHEET 2		
DRAWN BY				
DATE				
19-APRIL-2017	SUBMITAL TO			