

Contents - Residential

Model Nomenclature	TOC-5
Connected Comfort Solutions	
• Conventional 24 Volt Smart Thermostat	CHS-1
• ComfortLink™ II Communicating Smart Thermostat	CHS-2
• Trane® Home Compatible Products	CHS-3
Split System Cooling	
• TruComfort™ Variable Speed Single Phase, 2-5 Tons (4TTV0, 4TTV8, 4TTV7)	SC-1
• Single Phase, 1½-5 Tons (4TTX7, 4TTX5)	SC-3
• Single Phase, 1½-5 Tons (4TTR6, 4TTR5, 4TTL5)	SC-5
• Single Phase, 1½-5 Tons (4TTR4, 4TTR3)	SC-7
• Three Phase (4TTA7, 4TTA4, 4TTA3)	SC-9
Split System Heat Pumps	
• TruComfort™ Variable Speed Single Phase, 2-5 Tons (4TWV0, 4TWL9, 4TWV8, 4TWV7)	SH-1
• Single Phase, 1½-5 Tons (4TWX7, 4TWX5, 5TWX5)	SH-3
• Single Phase, 1½-5 Tons (4TWR6, 4TWR5, 5TWR5, 4TWL5)	SH-5
• Single Phase, 1½-5 Tons (4TWR4)	SH-7
• Three Phase (4TWA7, 4TWA4)	SH-9
Air Handlers/Heaters	
• Features and Benefits	AH-1
• Hyperion, TAMX, TAM9 Variable Speed Multi-Position, 2-5 Tons (TAMX, TAM9)	AH-2
• Multi-position Chart	AH-5
• Hyperion, GAM5 Multi-Position, Single Phase, 1½-5 Tons (GAM5)	AH-6
• Heaters for Hyperion Multi-Position	AH-8
• TEM Split System, Single Phase, 1½-5 Tons (TEM8, TEM6, TEM4, 5TEM6)	AH-10
• Heaters for TEM	AH-12
• TMM Wall, Stud, or Over the Water Heater Mount Air Handlers Single Phase, 1½-3 Tons (TMM5, TMM4)	AH-14
• P-Series Modular Air Handler - Variable Speed	AH-16
Coils	
• Split System Aluminum Cased Heat Pump and Cooling (5TXC, 4TXC-DS, 4PXC-U, 4PXC-D)	COIL-1
• Split System Aluminum Uncased Heat Pump and Cooling (4AXA, 4PXA-U)	COIL-2
• Split System Aluminum Cased Heat Pump and Cooling (4PXF)	COIL-3
• Split System Aluminum Cased Heat Pump and Cooling (4MXC)	COIL-4
Furnaces	
• S9V2-VS, S9V2 Two Stage Variable Speed ECM	FUR-1
• S9X2 Two Stage High Efficiency ECM	FUR-2
• S9V2-VS, S9V2, S9X2 Features & Accessories	FUR-3
• S9X1, S9B1 Single Stage High Efficiency ECM	FUR-4
• S9X1, S9B1 Features & Accessories	FUR-5
• XC95m Airflow Directions	FUR-6
• XC95m Modulating Communicating Variable Speed (TUHM, TDHM)	FUR-7
• XC95m Features & Accessories	FUR-8
• Special Use Furnace Accessories	FUR-9
• S8V2-C Two Stage Communicating ECM Variable Speed	FUR-10
• S8X2 Two Stage ECM	FUR-10
• S8X1, S8B1 Single Stage ECM	FUR-11
• S8V2-C, S8X2, S8X1, S8B1 Features & Accessories	FUR-12
• XC80 Airflow Directions	FUR-14
• XC80 Communicating Two Stage ECM Variable Speed (TUD2-ACV, TDD2-ACV)	FUR-15
• XV80 Two Stage ECM Variable Speed (TUD2, TDD2)	FUR-15
• XC80, XV80 Features & Accessories	FUR-16
• High Efficiency Oil Furnaces Ordering Information	FUR-18
• L8V1 Single Stage, Variable Speed, Ultra-Low NOx Gas Furnace (CALIFORNIA ONLY)	FUR-19
• L8X1 Single Stage, Ultra-Low NOx Gas Furnace (CALIFORNIA ONLY)	FUR-19
• L9X1 Single Stage, Ultra-Low NOx Gas Furnace (CALIFORNIA ONLY)	FUR-20

This publication is for general reference information only and is not intended for systems equipment / combination selections.

For complete equipment / combination selections, installation instructions and warranty information please refer to Product Data/Ratings and/or Installers Guides and Limited Warranty Handbooks.

Products listed in this book are not always carried in factory/distributor inventory, nor are all products available through all distribution channels. Consult your Distributor for availability and shipping information.

Since Trane has a policy of continuous product improvement, it reserves the right to change design and specification without notice.

© 2023 Trane. All rights reserved.

For complete equipment / combination selections, installation instructions and warranty information, please refer to Product Data/Ratings and/or Installers Guides and Limited Warranty Handbooks.

Contents - Residential

Indoor Air Quality

- Trane CleanEffects™ Whole House Air Cleaner (EFD) IAQ-1
- Perfect Fit™ Filter Accessories and SlimFit Filters IAQ-2
- QuikBox™ Media Cabinet and Filters IAQ-3
- Humidifiers Steam..... IAQ-4
- Humidifiers Fan Powered and Bypass..... IAQ-5
- Whole Home Dehumidifiers with Optional Ventilation..... IAQ-6
- Inline Ventilators (QF130V)..... IAQ-7
- Energy Recovery Ventilator (ERV) IAQ-8
- Premium Energy Recovery Ventilator (ERV)..... IAQ-9

Comfort Controls/Zone Sensors

- Conventional 24 Volt Smart Thermostat CCZO-1
- Trane® Link Communicating System Controller and Smart Thermostat CCZO-3
- ComfortLink™ II Communicating Smart Thermostat CCZO-4
- Zoning Communicating Sensor with Display..... CCZO-6
- Trane® Pivot™ Commercial Thermostats CCZO-7
- Trane® Link Zone Panel, 8X CAN Bus Distribution Board, Trane® Link Zone Kit... CCZO-8
- Trane® Link System Component Overview CCZO-9
- Conventional 24 Volt HVAC System Interface Relay Panel for
ComfortLink™ Controls CCZO-10
- ComfortLink™ II XL1050 Control Component Overview CCZO-11
- ComfortLink™ II Zoning Assembly & Zone Expander Panel..... CCZO-12
- ComfortLink™ II Zoning Component Overview CCZO-13
- 24 Volt Modulating Dampers CCZO-15
- Programmable Touchscreen Thermostats..... CCZO-20
- Programmable Thermostats..... CCZO-21
- Non-Programmable Comfort Controls..... CCZO-22
- Remote Sensors..... CCZO-23
- Outdoor Thermostat Kit..... CCZO-24

Packaged Units

- Cooling Convertible, 2-5 Tons (4TCC4)..... PK-1
- Hybrid/Dual Fuel Convertible, 2-5 Tons (4DCZ5)..... PK-4
- Heat Pump Convertible, 2-5 Tons (4WCZ6, 4WCZ5, 4WCY4, 4WCC4)..... PK-7
- Heat Pump Over/Under 2-3.5 Tons (4WHC4)..... PK-10
- Gas/Electric Convertible, 2-5 Tons (4YCZ6, 4YCZ5, 4YCY4, 4YCC4) PK-11
- Convertible, 2-5 Tons Single Power Entry Kits PK-14
- Convertible, 2-5 Tons Supplemental Heaters PK-15

RunTru™

- Model Nomenclature..... RTNOM-1
- Split System Cooling Single Phase – 1½-5 Tons (A4AC3, A4AC4, A4AC5) RTSC-1
- Split System Heat Pumps Single Phase – 1½-5 Tons
(A4HP4, A4HP5, A5HP5, E4HL5)..... RTSH-1
- Split System Air Handlers Single Phase 1½-5 Tons
(A4AH4, A4AH5, A5AHV, E4AH5) RTAH-1
- TMM Wall, Stud, or Over the Water Heater Mount
Air Handlers Single Phase, 1½-3 Tons (TMM5, TMM4) RTAH-4
- Split System – Cased Heat Pump and Cooling Coils (4MXC)..... RTCOIL-1
- A801X - Single Stage ECM (A801X) RTFUR-1
- A951X - Single Stage ECM (A951X) RTFUR-3
- A952V - Two Stage, Variable Speed ECM (A952V) RTFUR-3
- Packaged Cooling Convertible 2-5 Tons (4TCA4) RTPK-1
- Packaged Heat Pump Convertible 2-5 Tons (4WCA4) RTPK-3

Accessories/Information

- Roof Curbs (BAYCURB050A, BAYCURB051A) AC/IN-1
- Thermal Expansion Valves..... AC/IN-2
- Equipment Date Identification..... AC/IN-4
- Refrigerant Line Sets AC/IN-5
- Refrigerant HFC 410A (R-410A)..... AC/IN-6
- Refrigerant Piping Information for Two Stage Split Systems..... AC/IN-7
- Branch Circuit Wire Sizing Table/Heater De-Rating Chart..... AC/IN-8
- Basic Air Conditioning Formulas..... AC/IN-9
- Low Ambient Cooling Operation Accessories..... AC/IN-10

For complete equipment / combination selections, installation instructions and warranty information, please refer to Product Data/Ratings and/or Installers Guides and Limited Warranty Handbooks.

Contents - Light Commercial

Split System Cooling

- Odyssey with Symbio™ Single Circuit, Three Phase, 6-25 Tons, R-410A (TTA)..... LSC-1
- Odyssey with Symbio™ Dual Circuit, Three Phase, 6-25 Tons, R-410A (TTA)..... LSC-2
- Three Phase, 6-25 Tons, R-410A Condenser Accessories LSC-3
- Three Phase, 6-25 Tons, Control Options LSC-4

Split System Heat Pumps

- Odyssey with Symbio™ Three Phase, 6-20 Tons, R-410A (TWA) LSH-1
- Three Phase, 6-20 Tons, R-410A Accessories..... LSH-2
- Three Phase, 6-20 Tons, Controls LSH-2

Air Handlers/Heaters

- Odyssey with Symbio™ Single Phase 5-10 Tons, Three Phase 5-25 Tons (TWE).....LAH-1
- Heaters for Single and Three Phase LAH-3
- Accessories for Single and Three Phase LAH-4

Packaged Cooling

- Precedent™ Convertible, 3-5 Tons Features LPC-1
- Precedent™ Convertible, 3-5 Tons, R-410A (THC, TSC) LPC-2
- Precedent™ Convertible, 3-5 Tons Model Digit Numbers..... LPC-3
- Precedent™ Convertible, 3-5 Tons, Electric Heaters LPC-5
- Precedent™ Convertible, 3-5 Tons Accessories..... LPC-6
- Precedent™ Convertible, 3-5 Tons Zone Sensors/Thermostats..... LPC-8
- ReliaTel™ Controls for Precedent™
(Packaged Unit Protection/Operation Timings and Features)..... LPC-9
- Precedent™ with Symbio™ Convertible, 6-25 Tons Features LPC-10
- Precedent™ with Symbio™ Convertible, 6-25 Tons, R-410A (THJ, TSJ) LPC-11
- Precedent™ with Symbio™ Convertible, 6-25 Tons Model Digit Numbers LPC-13
- Precedent™ with Symbio™ Convertible, 6-25 Tons, Electric Heaters LPC-14
- Precedent™ with Symbio™ Convertible, 6-25 Tons Accessories LPC-15
- Foundation™ 3-5 Tons, R-410A (EBC) LPC-16
- Foundation™ 3-5 Tons, R-410A (Model Digit Numbers)..... LPC-17
- Foundation™ 3-5 Tons, Accessories..... LPC-18
- Foundation™ 3-5 Tons, Heaters LPC-19
- Medium Foundation™ 7.5-12.5 Tons, R-410A (ECC)..... LPC-20
- Medium Foundation™ 7.5-12.5 Tons, R-410A (Model Digit Numbers) LPC-21
- Medium Foundation™ 7.5-12.5 Tons Accessories LPC-22
- Medium Foundation™ 7.5-12.5 Tons Heaters..... LPC-23
- Foundation™ 15-25 Tons, R-410A (ECC) LPC-24
- Foundation™ 15-25 Tons, R-410A (Model Digit Numbers)..... LPC-25
- Foundation™ 15-25 Tons, Accessories..... LPC-26
- Foundation™ 15-25 Tons, Heaters LPC-27

Packaged Heating

- Precedent™ Convertible, 3-10 Tons Features LPH-1
- Precedent™ Convertible, 3-10 Tons, R-410A (WHC/DHC)..... LPH-2
- Precedent™ Convertible, 3-10 Tons, R-410A (WSC) LPH-4
- Precedent™ Convertible, 3-10 Tons Model Digit Numbers..... LPH-5
- Precedent™ Convertible, 3-10 Tons Electric Heaters LPH-7
- Precedent™ Convertible, 3-10 Tons, Electric Heaters and Zone Sensors LPH-8
- Precedent™ Convertible, 3-10 Tons Accessories..... LPH-9
- Precedent™ with Symbio™ Convertible, 12.5-25 Tons Features..... LPH-11
- Precedent™ with Symbio™ Convertible, 12.5-25 Tons, R-410A
(WHJ, DHJ, WSJ, DSJ).....LPH-12
- Precedent™ with Symbio™ Convertible, 12.5-25 Tons Model Digit Numbers....LPH-14
- Precedent™ with Symbio™ Convertible, 12.5-25 Tons Accessories LPH-15

Contents - Light Commercial

Packaged Gas/Electric

- Precedent™ Convertible, 3-5 Tons Features LPG-1
- Precedent™ Convertible, 3-5 Tons, 17 SEER, R-410A (YHC)..... LPG-2
- Precedent™ Convertible, 3-5 Tons, 15 SEER, R-410A (YHC)..... LPG-3
- Precedent™ Convertible, 3-5 Tons, 14 SEER, R-410A (YSC-G)..... LPG-4
- Precedent™ Convertible, 3-5 Tons Model Digit Numbers..... LPG-5
- Precedent™ Convertible, 3-5 Tons Accessories..... LPG-7
- Precedent™ Convertible, 3-5 Tons Zone Sensors/Thermostats..... LPG-9
- Precedent™ with Symbio™ Convertible, 6-25 Tons Features LPG-10
- Precedent™ with Symbio™ Convertible, 6-25 Tons,
High Efficiency, R-410A (YHJ)..... LPG-11
- Precedent™ with Symbio™ Convertible, 6-25 Tons,
Standard Efficiency, R-410A (YSJ)..... LPG-13
- Precedent™ with Symbio™ Convertible, 6-25 Tons Model Digit Numbers LPG-15
- Precedent™ with Symbio™ Convertible, 6-25 Tons Accessories LPC-16
- Foundation™, 3-5 Tons, R-410A (GBC)..... LPG-17
- Foundation™, 3-5 Tons, R-410A (Model Digit Numbers)..... LPG-18
- Foundation™, 3-5 Tons, R-410A Accessories LPG-19
- Medium Foundation™ 7.5-12.5 Tons, R-410A (GCC) LPG-20
- Medium Foundation™ 7.5-12.5 Tons, R-410A (Model Digit Numbers) LPG-21
- Medium Foundation™ 7.5-12.5 Tons Accessories LPG-22
- Foundation™, 15-25 Tons, R-410A (GCC)..... LPG-23
- Foundation™, 15-25 Tons, R-410A (Model Digit Numbers)..... LPG-24
- Foundation™, 15-25 Tons Accessories..... LPG-25

Accessories/Information

- Precedent™ Roof Curb Compatibility Information LAC/IN-1
- Odyssey Footprint Information..... LAC/IN-2

Comfort Controls/Zone Sensors

- Zone Sensors LCCZO-1
- Air-Fi Wireless Communicating Zone Sensors LCCZO-3
- Thermostats LCCZO-4



It's Hard To Stop A Trane.®

Model Nomenclature Residential

Outdoor Units

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
4 T R 4 0 6 0 A 1 0 0 0 A A

- Refrigerant Type**
2 = R-22
4 = R-410A
5 = R-454B
- Brand**
T = Trane
- System Type**
T = AC
W = HP
- Product Family**
A = Light Commercial R = XR
B = XB V = VSPD
L = Side Discharge X = XL
M = XM/XB 300 Z = 2 Recip 20 SEER
- Nominal Rated SEER2**
0 = 10 or 20 SEER2 6 = 16 SEER2
3 = 13 SEER2 7 = 17 SEER2
4 = 14 SEER2 8 = 18 SEER2
5 = 15 SEER2 9 = 19 SEER2
- Field Connection**
0 = Brazed
5 = Mechanical
- Nominal Tonnage**
12 = 1.0 24 = 2.0 31 = 2.5 42 = 3.5 49 = 4.0 72 = 6.0
18 = 1.5 25 = 2.0 36 = 3.0 43 = 3.5 60 = 5.0
19 = 1.5 30 = 2.5 37 = 3.0 48 = 4.0 61 = 5.0
- Major Design Change**
A thru Z Note: No F, I, O
- Power Supply** Voltage/Phz/Hz
1 = 200-208-230/1/60 4 = 460/3/60 A = 220-240/1/50
3 = 200-230/3/60 5 = 400/3/60 D = 380-415/3/50
- Other Functions**
000 = Typical-no meaning QH0 = Qatar w/ high capacity ID
00L = Latin America QM0 = Qatar w/ nom. capacity ID
COT = Coated PlateFin S00 = SASO Cooling Only
BH0 = Bahrain w/ high capacity ID SE0 = SASO w/ Electric Ht
BM0 = Bahrain w/ nom. capacity ID SV0 = SASO Vidalia
- Minor Design Change**
A thru Z Note: No F, I, O
- Service Digit - Not Orderable**
A thru Z Note: No F, I, O

R-454B Air Handler

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
5 T A M X B 0 2 A V 2 1 D A A

- Refrigerant**
5 = R-454B
- Brand**
T = Trane
- Product Type**
A = Hyperion Air Handler
E = Metal Air Handler
- Convertability**
M = Multi-poise 4-way
- Product Tier**
X = Communicating or 24v TAM
4 = 24v Entry Level
6 = 24v Mid-Tier
8 = High-Tier Communicating or 24v
- Cabinet Width**
B = Hyperion: 17.5"; TEM: 18.5"
C = Hyperion: 21.3"; TEM: N/A
D = Hyperion: 23.5"; TEM: 23.5"
- Cooling Capacity - 1,000 BTUs**
01 = 18 - 24K 05 = 36 - 48K
02 = 18 - 24K 06 = 36 - 60K
03 = 18 - 30K 07 = 42 - 60K
04 = 24 - 42K
- Major Modification**
- Airflow Type & Capability**
C = CTM
V = Variable Speed
- Nominal Airflow Tonnage**
2 = 2 Tons 4 = 4 Tons
3 = 3 Tons 5 = 5 Tons
- Power Supply**
1 = 208 - 230/1/60
2 = Dual Voltage (120 or 230)
- Control Type**
S = 24V 3 = 3-Phase
D = Link or 24V
- Minor Design Change**
- Service Digit**

Hyperion Air Handler

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
G A M 5 A 0 B 3 6 M 3 1 S A A

- Brand**
T or G = Trane Technologies
- Product Type**
A = Air Handler
E = Air Handler
- Convertability**
M = Multi-poise 4-way
F = Upflow Front Return, 3-way
T = 3-way
- Product Tier**
2 = Good, Entry Level Feature Set
4 = Better, Retail Replacement Mid Effy.
5 = Better, Entry Level High Effy., Multi-Speed
7 = Best, Retail Replacement High Effy., Variable-Speed
8 = Best, Retail Ultimate High Effy., Variable-Speed
9 = Best, Comm/24V Variable-Speed
G = Best, Geothermal
X = Best, Trane Link/24V Variable Speed
- Major Design Change**
- No Descriptor**
0 = Air Handler / Coil
- Size (Footprint)**
A = 17.5 x 21.8
B = 21.3 x 21.8
C = 23.5 x 21.8
- Cooling Size: Air Handler or Coil**
0-9 = AH Coil - 1000 BTU's (18, 24, 30, 36, 42, 48, 60)
- Airflow Type & Capability**
S = Standard Effy PSC, 1-5 - nom. Tonnage (cfm/ton)
M = Mid Effy Multi-Speed, 1-5 - nom. Tonnage (cfm/ton)
H = High Effy Variable, 1-5 - nom. Tonnage (cfm/ton)
V = High Effy Variable, 1-5 - nom. Tonnage (cfm/ton)
- Power Supply**
1 = 208-230/1/60
- System Control Type**
S = Standard - 24 VAC
C = CLII 13.8 VDC
D = Dual (24 VAC or ComfortLink/Trane Link)
E = Epoxy Coated Coil Fins
- Minor Design Change**
- Service Digit - Not Orderable**

Hyperion Air Handler Electric Heaters

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
B A Y E A A C 1 5 B K 1 A A A

- Brand**
B = Both Brands
- Product Type**
AY = Accessory
- Heat Type**
E = Electric Heater
- Product Tier**
A = TAM9, TAM4, GAM5, TAMGB
E = TAM8, TAM7
C = GAF2
- Size (Footprint)**
A-C = Minimum Cabiner Width
- Size (Footprint)**
A-C = Maximum Cabiner Width
- Electric Heat Input**
Electric Heat kW
- Connection**
BK = Breaker
LG = Lugs
- Power Supply**
1 = 208-230/1/60
A = 200/1/50
3 = 208-230/3/60
- Major Design Modification**
- Minor Design Modification**
- Service Digit - Not Orderable**

For complete equipment / combination selections, installation instructions and warranty information, please refer to Product Data/Ratings and/or Installers Guides and Limited Warranty Handbooks.



It's Hard To Stop A Trane.®

Model Nomenclature Residential

Air Handler - Residential

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
T E M A O B 3 6 M 3 1 S A A

- Brand**
T = Trane
- Product Type**
E = Metal Cabinet
M = Metal Over Hot Water Heater
- Convertability**
M = Multi-poise 4-way
- Product Tier**
4/5 = Entry Level Multi-Speed
6 = Entry Level Variable Speed
8 = Entry Level Comm/24V Variable Speed
- Major Design Change**
- No Descriptor**
0 = Air Handler / Coil
- Size (Footprint) (W x D)**
A = 20.5 x 15.0
B = 18.5 x 21.1 (TEM), 22.0 x 19.0 (TMM)
C = 23.5 x 21.1
D = 26.5 x 21.1
- Cooling Size: Air Handler or Coil**
0-9 = AH Coil - 1000 BTU's (18, 24, 30, 36, 42, 48, 60)
- Airflow Type & Capability**
S = Standard Effy, 1-5 - nom. Tonnage (cfm/ton)
M = Mid Effy Multi-Speed, 1-5 - nom. Tonnage (cfm/ton)
H = High Effy Variable, 1-5 - nom. Tonnage (cfm/ton)
V = High Effy Variable, 1-5 - nom. Tonnage (cfm/ton)
- Power Supply**
1 = 208-230/1/60
- System Control Type**
S = Standard - 24 VAC
C = CLII 13.8 VDC
D = Dual (24 VAC / CLII 13.8 VDC)
- Minor Design Change**
- Service Digit - Not Orderable**

Air Handler

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
4 F W C A 0 2 4 A 1 0 0 0 A A

- Refrigerant Type**
4 = R-410A
- Model Type**
FWC = Convertible
FWH = Convertible with Constant Torque ECM Motor
FWM = Stud Mount with Factory Installed Electric Heat
FWD = Furr-Down Uncased with Factory Installed Electric Heat
FWF = Furr-Down Cased with Factory Installed Electric Heat
- Insulation**
A = Standard
F = R4.2 Insulation
- Capacity**
Nominal Capacity in 1000's (BTUH)
- Major Design Change**
- Power Supply**
1 = Single Phase
- Electrical Connection**
0 = Pig Tails
D = Pull Disconnect
- Electric Heater**
00 = No heater
05 = 5 KW
08 = 8 KW
10 = 10 KW
15 = 15 KW
20 = 20 KW
- Minor Design Change**
- Service Digit - Not Orderable**

Air Handler/Heaters

1 2 3 4 5 6 7 8 9 10 11 12 13 14
B A Y H T R 1 4 1 5 B R K A

- Accessory**
- Heater**
- Power Supply**
1 = Single Phase
3 = Three Phase
- Series/Family**
3 = 2/4TEH Models Only
4 = 4TEC / Legacy
5 = TEM Models Only
- Heater KW**
- Electrical Connection**
000 = Pig Tails Only
BRK = Circuit Breaker
PDC = Pull Disconnect
RBR = Recessed Breaker-TVF018, TVF024, 14" Deep only
RPD = Recessed Pull Disconnect-TVF018, TVF024, 14" Deep only
- Minor Design Change**

P-Series Air Handler

1 2 3 4 5 6 7 8 9 10 11 12 13 14
P 0 V 0 A 0 0 0 M 3 0 S A A

- Level**
P = P Series
- Model Descriptor**
0 = Modular Air Handler
- Blower Type**
V = Variable Speed
- No Descriptor**
0 = All P-Series
- Cabinet Width**
A = 14.5"
B = 17.5"
C = 21"
D = 24.5"
- Nominal Coil Capacity in 1000's (BTUH)**
000 = N/A
- Poise**
M = 4 Way Poise
- Air Capacity for Cooling (in nominal tons)**
2 = 2 Tons
3 = 3 Tons
4 = 4 Tons
5 = 5 Tons
- No Descriptor**
0 = All P-Series
- Communicating Capability**
S = 24 volt
- Major Design Change**
- Minor Design Change**

For complete equipment / combination selections, installation instructions and warranty information, please refer to Product Data/Ratings and/or Installers Guides and Limited Warranty Handbooks.



It's Hard To Stop A Trane.®

Model Nomenclature Residential

Gas Furnaces

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 T U D 1 B 0 8 0 A 9 H 3 1 A A

Furnace Configuration

TU = Upflow/Horizontal
 TD = Downflow/Horizontal

Type

E = 80% Induced Draft Standard
 D = 80% Induced Draft Premium
 C = 90% Condensing Standard
 X = 90% Condensing Premium
 H = 95% + Condensing Premium

Number of Heating Stages

1 = Single Stage
 2 = Two Stage
 M = Modulating

Cabinet Width

A = 14.5" Cabinet Width
 B = 17.5" Cabinet Width
 C = 21.0" Cabinet Width
 D = 24.5" Cabinet Width

Nominal Heating Input in 1000's (BTUH)

080 = 80,000 BTUH

Major Design Change

Voltage

9 = 115 Volts / 60 Hertz / Natural Gas
 A = 115 Volts / 50 Hertz / Natural Gas
 C = 115 Volts / Natural Gas with Communicating System Control
 F = 115 Volts / Natural Gas with Integrated Electronic Filter
 D = 115 Volts / Natural Gas with Communicating System Control and Integrated Electronic Filter

Air Capacity for Cooling

Standard PSC	Variable Speed	High Efficiency
24 = 2 Tons	V3 = 3 Tons	H3 = 3 Tons
36 = 3 Tons	V4 = 4 Tons	H4 = 4 Tons
42 = 3.5 Tons	V5 = 5 Tons	H5 = 5 Tons
45 = 4 Tons		
48 = 4 Tons		
54 = 5 Tons		
60 = 5 Tons		
72 = 6 Tons		

Draft Inducer Speeds

1 = Single Speed
 2 = Two Speed
 V = Variable Speed

Minor Design Change

Service Digit - Not Orderable

S-Series Furnaces

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 S 8 B 1 B 0 8 0 U 2 P S A A A

Level

S = Series

AFUE

8 = 80%
 9 = 90% or Higher

Blower

B = Base model
 P = PSC
 X = CTM
 V = Variable Speed

Gas Valve Stages

1 = Single Stage
 2 = 2 Stage
 M = Modulating

Cabinet Width

A = 14.5"
 B = 17.5"
 C = 21"
 D = 24.5"

BTU Input

080 = 80,000 BTUH

Poise Options

U = 3 Way
 D = Dedicated Downflow
 M = 4 Way Poise

Air Capacity for Cooling

(in nominal tons)
 2 = 2 Tons
 3 = 3 Tons
 4 = 4 Tons
 5 = 5 Tons

Inducer Type

P = PSC
 X = CTM
 V = Variable Speed

Communicating Capability

C = Communicating System Control
 D = Communicating System Control, Low NOx
 S = 24 Volt
 T = 24 Volt, Low NOx

Major Design Change

Minor Design Change

Service Digit - Not Orderable



It's Hard To Stop A Trane.®

Model Nomenclature Residential

Heat Pump/ Cooling Coils

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
4 T X C B 0 3 6 A C 3 H C A A

- Refrigerant Type**
 - 4 = R-410A
 - 5 = R-454B
- Series**
 - T = Premium (Cooling and HP)
 - P = Premium High Efficiency - Dedicated position (Cooling and HP)
 - A = Entry Level (Cooling and HP)
 - M = Entry Level (Cooling and HP)
- Coil Design**
 - X = Direct Expansion Evaporator Coil
- Coil Feature**
 - C = Cased A Coil
 - A = Uncased A Coil
 - F = Cased Horizontal Flat Coil
- Coil Width (Cased/Uncased)**
 - A = 14.5" / 13.3" D = 24.5" / 23.3"
 - B = 17.5" / 16.3" H = 10.5"
 - C = 21.0" / 19.8"
- Refrigerant Line Coupling /**
- Airflow Configuration**
 - 0 = Brazed
 - U = Upflow only, convertible to Horizontal Left
 - D = Downflow only, convertible to Horizontal Right
- Coil Size (01-10) or Nominal Capacity in 1000's (BTUH)**
- Major Design Change**
- Efficiency**
 - C = Standard
 - S = High Efficiency (derived from 10 SEER products)
 - Z = High Efficiency (TXV modulates to 50%)
- Refrigerant Control**
 - 3 = TXV - Non-Bleed
 - 6 = FCCV (Flow Control/Check Valve)
- Coil Circuitry**
 - H = Heat Pump C = Cooling
- Airflow Configuration**
 - A = Upflow
 - U = Upflow /Downflow
 - D = Downflow
 - R = Downflow / Horizontal Right
 - H = Horizontal Left/Right
 - C = Convertible - Upflow, Downflow, Left or Right
- Minor Design Change**
- Service Digit - Not Orderable**

TXV Kits

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
2 A Y T X V H 3 A 2 5 3 1 A A

- Refrigerant**
 - 4 = R-410A
 - 2 = R-22
- Accessory**
- Accessory Type**
 - TXV Kit
- Compatibility**
 - Cooling & Heat Pump Compatible
- Flow Control**
 - 3 = TXV - Non Bleed
- Major Design Change**
 - B = Internally Mounted (Mechanical Fittings)
 - C = Internally Mounted (Mechanical Fittings)
 - D = Internally Mounted (Mechanical Fittings)
- Minimum Nominal Capacity in 000's BTU's**
- Maximum Nominal Capacity in 000's BTU's**
- Minor Design Change**
- Service Digit - Not Orderable**



It's Hard To Stop A Trane.®

Model Nomenclature Residential

Trane CleanEffects™ Whole House Air Cleaner

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
E F D 1 4 5 A L F R 0 0 0 C A

Brand _____
 E = Dual Branded

Filtration _____
 ifD = _____

Size _____
 Furnace Upflow Furnace Downflow Air Handler
 145 = 14.5" 14D = 14.5" 215 = 21.5"
 175 = 17.5" 17D = 17.5" 235 = 23.5"
 210 = 21.0" 21D = 21.0" 260 = 26.0"
 245 = 24.5" 24D = 24.5"

Major Design Change _____

Power Supply _____
 L = Low Voltage

Application _____
 AH000 = Air Handler
 FR000 = Furnace

Minor Design Change _____

Service Digit - Not Orderable _____

QuikBox Air Cleaner

1 2 3 4 5 6 7 8 9 10
E QB FM 175 A 0 FR 11

Brand _____
 E = Dual Branded

Model _____
 QB = QuikBox

Filter Type _____
 FM = Filter Media

Product Dimensions _____
 165 = 16.5" Furnace Width
 175 = 17.5" Furnace Width
 210 = 21.0" Furnace Width
 245 = 24.5" Furnace Width
 17D = 17.5" Air Handler Width
 185 = 18.5" Air Handler Width
 215 = 21.5" Air Handler Width
 235 = 23.5" Air Handler Width

Major Design Change _____

Product Development Sequence _____

Application _____
 AH = Air Handler
 FR = Furnace

MERV Rating _____
 11 = MERV 11
 13 = MERV 13

Dehumidifiers

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
E D H U M 7 0 H A H M 0 0 B A

Brand _____
 E = Dual Branded

Accessory Type _____
 DHUM = Humidifier

Model Series _____
 70H = 70 ppd, 1800 sq'
 098 = 98 ppd, 2300 sq'
 120 = 120 ppd, 2500 sq'

Major Design Change _____
 A = Design Series

Configuration _____
 H = Horizontal, Ducted Attic, Basement
 V = Vertical, Closet or Limited Space
 S = Split System Indoor and Outdoor Section

Voltage Supplied Wiring _____
 1 = 115 VAC, 9" Cord, Grounded Plug

Controls _____
 M = Wired 24V terminals

Application _____
 D = Dedicated Ventilating Dehumidifier
 N = Dehumidifier with optional ventilation

Minor Design Change _____

Service Digit - Not Orderable _____

QuikBox Filter Accessories

1 2 3 4 5 6
FLR QB 5 FR 17 M11

Accessory Type _____
 FLR = Filter

Model _____
 QB = QuikBox

Product Development Sequence _____
 5 = 5" Expandable Media

Application _____
 AH = Air Handler
 FR = Furnace

Product Dimensions _____
 16 = 16.5" Furnace Width
 17 = 17.5" Furnace Width
 21 = 21.0" Furnace Width
 24 = 24.5" Furnace Width
 17D = 17.5" Air Handler Width
 18 = 18.5" Air Handler Width
 21 = 21.5" Air Handler Width
 23 = 23.5" Air Handler Width





MERV Rating _____
 11 = MERV 11
 13 = MERV 13

For complete equipment / combination selections, installation instructions and warranty information, please refer to Product Data/Ratings and/or Installers Guides and Limited Warranty Handbooks.



It's Hard To Stop A Trane.®

Model Nomenclature Residential

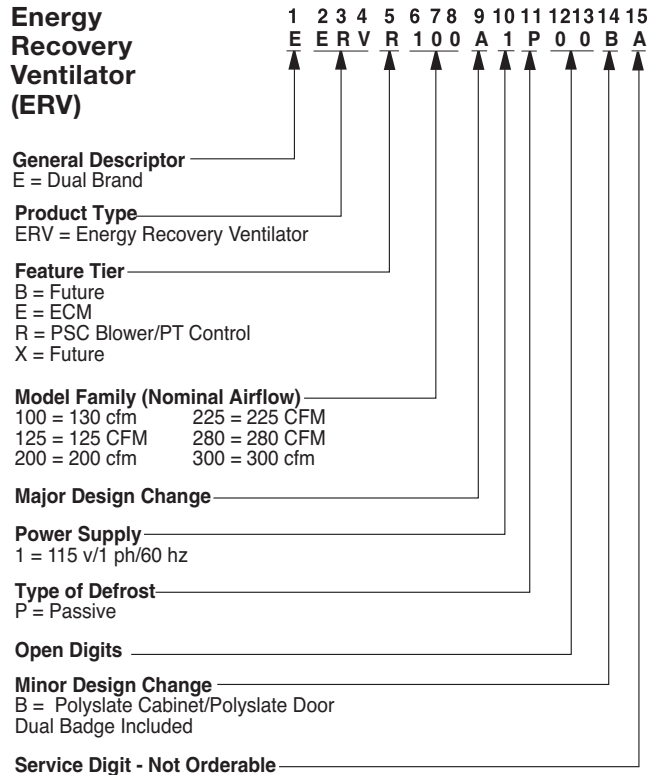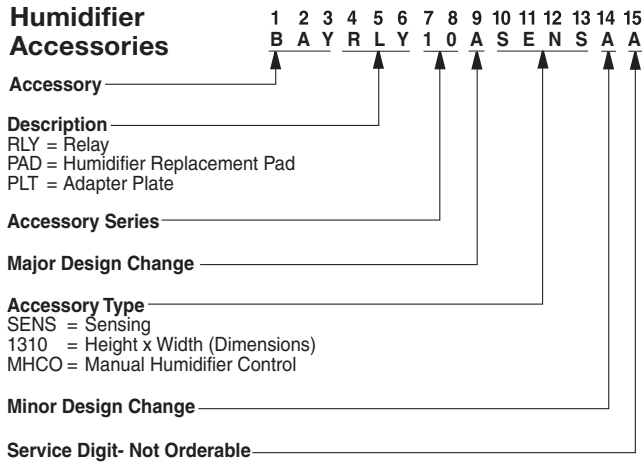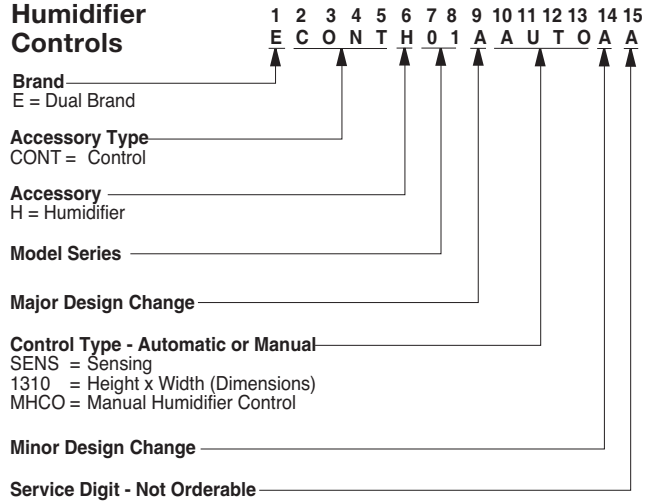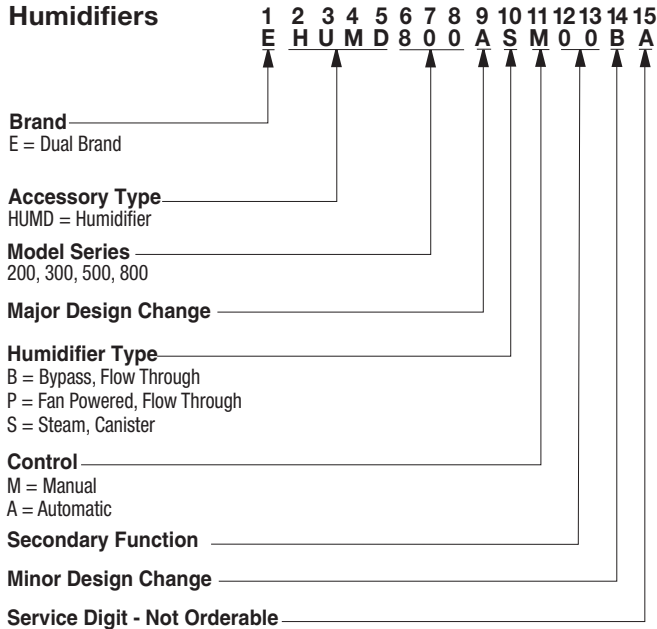



It's Hard To Stop A Trane.®

Model Nomenclature Residential

Packaged Units 15-Digit Model

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
4 Y C C 4 0 4 2 A 3 0 0 0 A A

- Refrigerant**
4 = R-410A
- Type**
Y = Gas Electric
W = Heat Pump
D = Dual Fuel
T = Air Conditioner
- Configuration**
C = Convertible
H = Horizontal (only)
- Model Tier**
C = Entry Level
Y = Premium
Z = Leadership - (2-Stage)
- Efficiency Tier**
4 = 14.0 SEER / 13.4 SEER2
5 = 15.0 SEER2
6 = 16.0 SEER

- Capacity in 1000's (BTUH)**
018 042
024 048
030 060
036

Major Design Change

- Voltage & Phase**
1 = 230V 1 Phase
3 = 230V 3 Phase
4 = 460V 3 Phase

- Gas Heat Input (MBTU/H)**
000 (AC or HP) 090
060 096
070 115
075 120

Minor Design Change

Service Digit - Not Orderable

Packaged Units (Pre-410A Refrigerant)

1 2 3 4 5 6 7 8 9 10 11 12
Y C X 0 3 6 G 1 M 0 A 0

- Product Type**
TC = Cooling, Electric Heat
WC = Heat Pump Packaged
YC = Gas Electric
DC = Heat Pump with Gas Heat
- Airflow Configuration**
D = Downflow Y = Super High Efficiency
H, K = Horizontal Z = Ultra High Efficiency
C = Convertible
X = High Efficiency

- Cooling Capacity in 1000's (BTUH)**
018 = 1 1/2 Tons 060 = 5 Tons
024 = 2 Tons 150 = 12 1/2 Tons
030 = 2 1/2 Tons 180 = 15 Tons
036 = 3 Tons 210 = 17 1/2 Tons
042 = 3 1/2 Tons 240 = 20 Tons
048 = 4 Tons 300 = 25 Tons

Commercial High Efficiency Units

- 151 = 12 1/2 Tons
181 = 15 Tons
211 = 17 1/2 Tons
241 = 20 Tons
301 = 25 Tons

Major Design Change

- F = Impack - Side by Side - Ft. Smith Only
B = Over/Under - Ft. Smith Only
G = Impack Plus - Side by Side - Ft. Smith Only

Electrical Characteristics

- 1 = 208-230/1/60
3 = 208-230/3/60
4 = 460/3/60

Secondary Capacity And/Or Factory-Installed Options

- OO = No Heat, No Options
LO = Low Heating Capacity
MO = Medium Heating Capacity
HO = High Heating Capacity

Minor Design Change

Service Digit - Not Orderable



It's Hard To Stop A Trane.®

Model Nomenclature Residential

Controls

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
T L I N K 3 6 0 A C 5 2 Z A A

Brand

T = Trane
 Z = Unbranded

Accessory Type

CONT = Control (thermostat)
 ZONE = Control (zoning)
 LINK = Control (CAN thermostat kit)

Model Series

Major Design Modifications

Control Platform

M = Mechanical
 N = Non-programmable Electronic (Digital Display)
 F = Five/Two Programmable Electronic (Digital Display)
 S = Seven Day Programmable Electronic (Digital Display)
 C = Communicating
 W = Wireless

Heating Stages

Cooling Stages

Equipment Application

A = AC / Heat (Gas or Electric)
 G = AC / Heat (Gas)
 E = AC / Heat (Electric)
 H = Heat Pump
 M = Multi-Application - AC / Heat (Gas/Elec) / Heat Pump
 D = Dual Fuel, Heat Pump, or AC and Heat (Gas/Elec)
 C = Communicating
 Z = Zoning - Universal application - 3 wire Communicating zone control of AC or Heat (Gas/Elec) and Dual Fuel Heat Pump
 U = Universal Application - Communicating Control of AC/Heat (Gas/Elec) / Dual Fuel Heat Pump

Minor Design Change

Service Digit

Zone Dampers

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
Z D A M P R D M A 0 0 1 2 A A

Brand

Z = Zoning

Damper

Model Series

RD = Round
 RR = Retro-Fit Round
 SM = Side Mount Rectangular
 BM = Bottom Mount Rectangular

Modulating Damper (24 Volt, 60 Sec. Timing)

Major Design Modifications

Dimensions

0012 = 12" Round
 1014 = 10" X 14" Rectangular (motor mounted on 2nd dimension)

Minor Design Change

Service Digit

Accessories

1 2 3 4 5 6 7 8 9 10 11 12
***B A Y E C O N 0 0 1 A 0**

Denotes: Accessories

Accessories Type (Example: BAYCURB, TAYSTAT)

ASCT = Anti-Cycle Timer	LOAM = Low Ambient Controls
BARM = Barometric Relief	LPKT = L.P. Kit
BASE = Subbase	LSDR = Low Static Drive
BRZQ = Coupling Kit Adaptors	NXKT = NOx Rod Accessory Kit
CCHT = Crankcase Heater	PANL = Panel
CLE = Coil Enclosures	PLNM = Plenum
CURB = Roof Curb	PLUS = Add-on Heat Pump
DMPR = Damper	REFLN = Refrigerant Lines
DNFLW = Downflow Conversion Kit	RLAY = Relay
ECMT = Extreme Mounting Kit	SEAC = Sea Coast Kit
ECON = Economizer	SENS = Sensor
ENTH = Enthalpy Control	SPEK = Single Power Entry Kit
FLTR = Filter	STAT = Thermostat
GARD = Coil Guard	TBKT = Thru Base Utility Kit
GRLE = Return Air Grill	TEST = Test Accessory
HALT = High Altitude Kit	TFMR = Transformer
HGBP = Hot Gas Bypass Control	TWIN = Twinning Kits
HSMT = High Static Motor	TXVA = Cooling — Bleed/Non Bleed Kits
HTRA = Electric Heater (Digit 7 Is Used To Differentiate The Products Accessory Is Used With)	TXVH = Heat Pump Non Bleed Kits
ISLT = Isolator	UTIL = Curb Ext. Kit
KSKT = Start Accessory Kit	VENT = Termination Kit
LEGS = Snow Legs	WAR = Warranty
LEGSCAP = Leveling Caps	WATR = Hydronic Heat Coils
LIFT = Lifting Lug Kit	WRKT = Wire Kit
	2STG = 2 Stage Gas

Major Design Change

Numbers Are Sequentially Assigned Except For Electric Heaters.
 On Electric Heaters Digit 8 Is Used To Identify Voltage And Digit 9
 And 10 Are Used To Identify Capacity In KW's.

Minor Design Change

Accessory To Unit Match-up (When Required)

Service Digit - Not Orderable

*B or T or No Digit.

For complete equipment / combination selections, installation instructions and warranty information, please refer to Product Data/Ratings and/or Installers Guides and Limited Warranty Handbooks.