



Product Data


Side Discharge HP Models

For coastal applications where units are installed within one (1) mile of salt water, epoxy coated models are recommended. These models have an 8 week lead time after order.

4TWL6018A1000A
4TWL6024A1000A
4TWL6030A1000A
4TWL6036A1000A
4TWL6042A1000A
4TWL6048A1000A
4TWL6060A1000A

Epoxy Coated Model

4TWL6018A1COTA
4TWL6024A1COTA
4TWL6030A1COTA
4TWL6036A1COTA
4TWL6042A1COTA
4TWL6048A1COTA
4TWL6060A1COTA

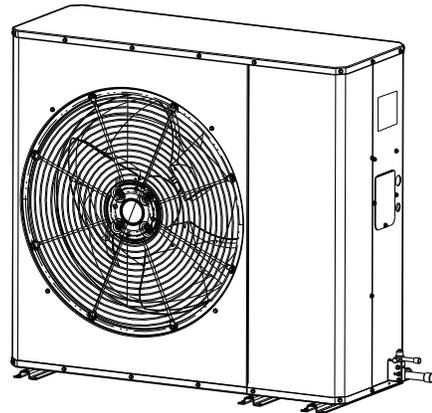

Note: "Graphics in this document are for representation only. Actual model may differ in appearance."



Outline Drawing

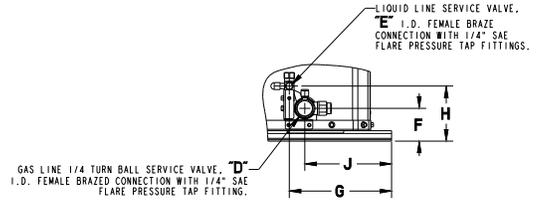
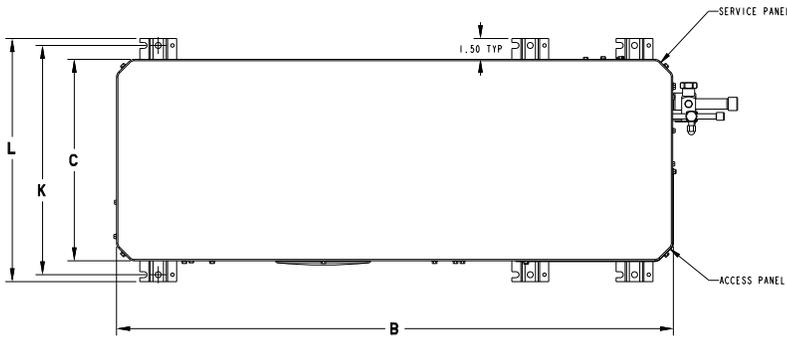


FIGURE 2

▲ SHOULD BE AT LEAST 152.4 (6 INCHES) FROM WALL AND 609.6 (2 FEET) FROM SURROUNDING SHRUBBERY ON ALL SIDES.


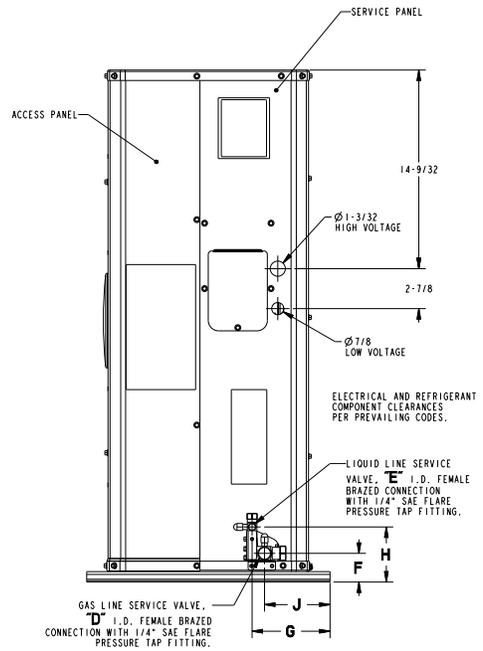


FIGURE 1

DWG. D159818_Rev D

Model	Base	A	B	C	D	E	F	G	H	J	K	L
4TWL6018A	3.2	781 (30-3/4)	1016 (40)	368 (14-1/2)	19 (3/4)	10 (3/8)	53 (2-1/16)	142 (5-19/32)	101 (3-31/32)	120 (4-23/32)	419 (16-1/2)	445 (17-1/2)
4TWL6024A	3.2	781 (30-3/4)	1016 (40)	368 (14-1/2)	19 (3/4)	10 (3/8)	53 (2-1/16)	142 (5-19/32)	101 (3-31/32)	120 (4-23/32)	419 (16-1/2)	445 (17-1/2)
4TWL6030A	4.3	934 (36-3/4)	1194 (47)	445 (17-1/2)	19 (3/4)	10 (3/8)	53 (2-1/16)	187 (7-11/32)	101 (3-31/32)	159 (6-1/4)	495 (19-1/2)	520 (20-1/2)
4TWL6036A	4.3	934 (36-3/4)	1194 (47)	445 (17-1/2)	22 (7/8)	10 (3/8)	53 (2-1/16)	187 (7-11/32)	101 (3-31/32)	159 (6-1/4)	495 (19-1/2)	520 (20-1/2)
4TWL6042A	4.3	934 (36-3/4)	1194 (47)	445 (17-1/2)	22 (7/8)	10 (3/8)	53 (2-1/16)	187 (7-11/32)	101 (3-31/32)	159 (6-1/4)	495 (19-1/2)	520 (20-1/2)
4TWL6048A	4.4	1086 (42-3/4)	1194 (47)	445 (17-1/2)	22 (7/8)	10 (3/8)	60 (2-3/8)	187 (7-11/32)	101 (3-31/32)	159 (6-1/4)	495 (19-1/2)	520 (20-1/2)
4TWL6060A	4.4	1086 (42-3/4)	1194 (47)	445 (17-1/2)	22 (7/8)	10 (3/8)	60 (2-3/8)	187 (7-11/32)	101 (3-31/32)	159 (6-1/4)	495 (19-1/2)	520 (20-1/2)

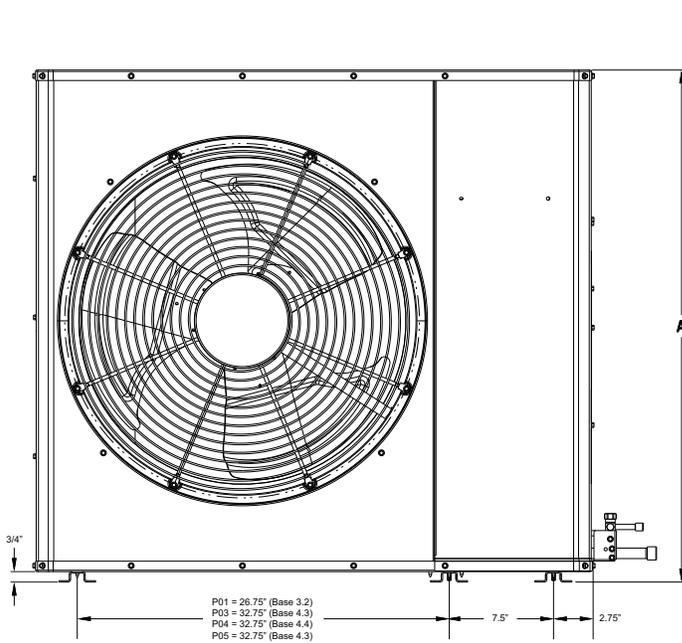

Sound Power Level

MODEL	A-Weighted Sound Power Level [dB(A)]	Full Octave Sound Power(dB)							
		63 Hz*	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
4TWL6018A	69	72	70	72	66	65	59	52	44
4TWL6024A	69	72	72	71	66	65	59	53	43
4TWL6030A	70	72	76	72	68	65	60	52	44
4TWL6036A	71	72	77	74	68	65	59	53	46
4TWL6042A	71	75	75	73	68	66	60	53	46
4TWL6048A	74	75	80	77	70	68	62	54	48

Note: Rated in accordance with AHRI Standard 270 *For Reference Only

MODEL	Sound Pressure [dB(A)]			
	3 ft	5 ft	10 ft	15 ft
4TWL6018A	62	58	51	48
4TWL6024A	62	58	51	48
4TWL6030A	63	58	52	49
4TWL6036A	64	59	53	50
4TWL6042A	64	59	53	50
4TWL6048A	67	62	56	53

Note: Rated in accordance with AHRI Standard 275



Product Specifications

Model No. ^(a)	4TWL6018A1XXXA	4TWL6024A1XXXA	4TWL6030A1XXXA	4TWL6036A1XXXA
POWER CONNS. – V/PH/HZ ^(b)	208–230/1/60	208–230/1/60	208–230/1/60	208–230/1/60
MIN. BRCH. CIR. AMPACITY	13	13	13	19
BR. CIR. PROT. RTG. – MAX. (AMPS)	20	20	20	30
COMPRESSOR	CLIMATUFF®-SCROLL	CLIMATUFF®-SCROLL	CLIMATUFF®-SCROLL	CLIMATUFF®-SCROLL
R.L. AMPS – L.R. AMPS	10.1 – 56	10.1 – 52	9.4 – 72.5	14.7 – 75
OUTDOOR FAN	PROPELLER	PROPELLER	PROPELLER	PROPELLER
DIA. (IN.)	23	23	27.5	27.5
NO. MOTORS – HP	1 – 1/8	1 – 1/8	1 – 1/8	1 – 1/8
F.L. AMPS	0.67	0.67	0.81	0.81
OUTDOOR COIL – TYPE	PLATE FIN	PLATE FIN	PLATE FIN	PLATE FIN
REFRIGERANT	4 LBS., 11 OZ	5 LBS., 9 OZ	6 LBS, 9 OZ	6 LBS, 13 OZ
LINE SIZE – IN. O.D. GAS ^(c)	3/4	3/4	3/4	7/8
LINE SIZE – IN. O.D. LIQ. ^(c)	3/8	3/8	3/8	3/8
CHARGING SPECIFICATIONS				
SUBCOOLING	8°F	10°F	8°F	8°F
DIMENSIONS	H X W X D	H X W X D	H X W X D	H X W X D
CRATED (IN.)	34.75 X 47.5 X 20.0	34.75 X 47.5 X 20.0	40.88 X 54.5 X 23.0	40.88 X 54.5 X 23.0
WEIGHT				
SHIPPING (LBS.)	186	186	222	225
NET (LBS.)	166	166	195	198
OPTIONAL ACCESSORIES				
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079	AY28X079
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Start Kit	BAYKSKT263	BAYKSKT263	BAYKSKT263	BAYKSKT263
Crankcase Heater Kit	BAYCCHT302RES	BAYCCHT302RES	BAYCCHT302RES	BAYCCHT302RES
Snow Leg Kit 4"	BAYLEGS004	BAYLEGS004	BAYLEGS004	BAYLEGS004
Snow Leg Kit 7"	BAYLEGS007	BAYLEGS007	BAYLEGS007	BAYLEGS007
Scroll Compressor Enclosure	BAYSDEN003	BAYSDEN003	BAYSDEN003	BAYSDEN003
Low Ambient Kit	BAYLOAM107A	BAYLOAM107A	BAYLOAM107A	BAYLOAM107A
Wall Mount Kit	BRK05033 ^(d)	BRK05033	BRK05033	BRK05033
Wind Baffle Kit	BAYWIND100	BAYWIND100	BAYWIND100	BAYWIND101
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079	AY28X079
Refrigerant Lineset ^(e)				

^(a) Certified in accordance with the Air-Source Unitary Air-conditioner Equipment certification program, which is based on AHRI standard 210/240.

^(b) Calculated in accordance with Natl. Elec. Codes. Use only HACR circuit breakers or fuses.

^(c) Standard line lengths – 150', Standard lift – 50' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub#32-3312-0* (* denotes latest revision)..

^(d) Available from Trane Parts

^(e) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

OUTDOOR UNIT ^(a)	4TWL6042A1XXXA	4TWL6048A1XXXA	4TWL6060A1XXXA
POWER CONNS. – V/PH/HZ ^(b)	208–230/1/60	208–230/1/60	208–230/1/60
MIN. BRCH. CIR. AMPACITY	25	26	29
BR. CIR. PROT. RTG. – MAX. (AMPS)	40	45	50
COMPRESSOR	CLIMATUFF®- SCROLL	CLIMATUFF®- SCROLL	CLIMATUFF®- SCROLL
R.L. AMPS – L.R. AMPS	19.2 – 124	19.6 – 130	22.2 – 127.9
OUTDOOR FAN	PROPELLER	PROPELLER	PROPELLER
DIA. (IN.)	27.5	27.5	27.5
NO. MOTORS – HP	1 – 1/5	1 – 1/5	1 – 1/4
F.L. AMPS	1.19	1.05	1.3
OUTDOOR COIL – TYPE	PLATE FIN	PLATE FIN	PLATE FIN
REFRIGERANT	7 LBS, 10 OZ	8 LBS, 5 OZ.	9 LBS, 0 OZ.
LINE SIZE – IN. O.D. GAS ^(c)	7/8	7/8	7/8
LINE SIZE – IN. O.D. LIQ. ^(c)	3/8	3/8	3/8
CHARGING SPECIFICATIONS			
SUBCOOLING	10°F	8°F	10°F
DIMENSIONS	H X W X D	H X W X D	H X W X D
CRATED (IN.)	40.88 X 54.5 X 23.0	46.88 X 54.5 X 23.0	46.88 X 54.5 X 23.0
WEIGHT			
SHIPPING (LBS.)	244	266	267
NET (LBS.)	217	239	240
OPTIONAL ACCESSORIES			
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101
Start Kit	BAYKSKT263	BAYKSKT263	BAYKSKT263
Crankcase Heater Kit	BAYCCHT302RES	BAYCCHT302RES	BAYCCHT302RES
Snow Leg Kit 4"	BAYLEGS004	BAYLEGS004	BAYLEGS004
Snow Leg Kit 7"	BAYLEGS007	BAYLEGS007	BAYLEGS007
Scroll Compressor Enclosure	BAYSDEN003	BAYSDEN003	BAYSDEN003
Low Ambient Kit	BAYLOAM107A	BAYLOAM107A	BAYLOAM107A
Wall Mount Kit	BRK05033 ^(d)	BRK05033	BRK05033
Wind Baffle Kit	BAYWIND100	BAYWIND100	BAYWIND100
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079
Refrigerant Lineset ^(e)			

^(a) Certified in accordance with the Air-Source Unitary Air-conditioner Equipment certification program, which is based on AHRI standard 210/240.

^(b) Calculated in accordance with Natl. Elec. Codes. Use only HACR circuit breakers or fuses.

^(c) Standard line lengths – 150', Standard lift – 50' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub#32–3312–0* (* denotes latest revision)..

^(d) Available from Trane Parts

^(e) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.



Accessory Description and Usage

Evaporation Defrost Control — SPST Temperature actuated switch that cycles the condenser off as indoor coil reaches freeze-up conditions. Used for low ambient cooling to 30°F with TXV.

Rubber Isolators — Six (6) large rubber donuts to isolate condensing unit from transmitting energy into mounting frame or pad. Use on any application where sound transmission needs to be minimized.

Hard Start Kit — Start capacitor and relay to assist compressor motor startup. Use in areas with marginal power supply, on long linesets, low ambient conditions, etc.

AHRI Standard Capacity Rating Conditions

AHRI Standard 210/240 Rating Conditions

1. Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.

AHRI Standard 270 Rating Conditions — (Noise rating numbers are determined with the unit in cooling operations.) Standard Noise Rating number is at 95°F outdoor air.

Model Nomenclature

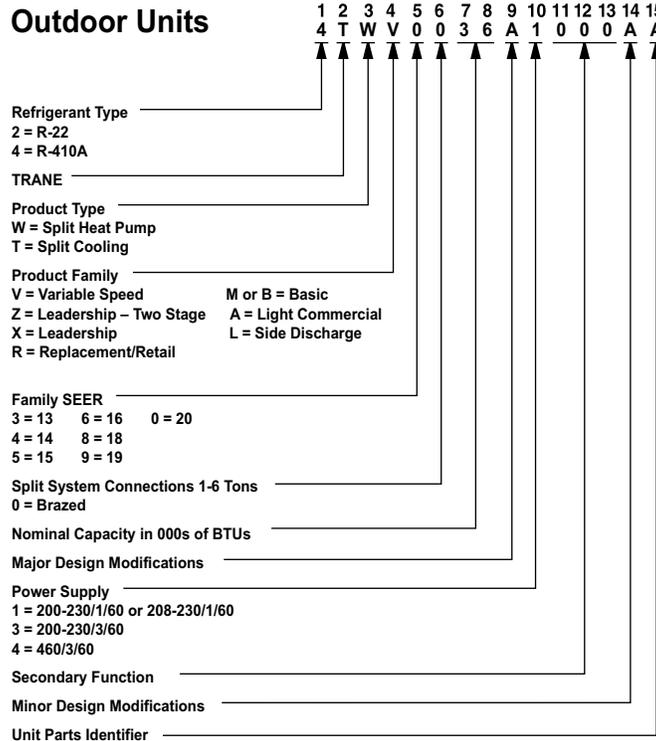


Figure 2. 1.5 & 2.5 Ton Models

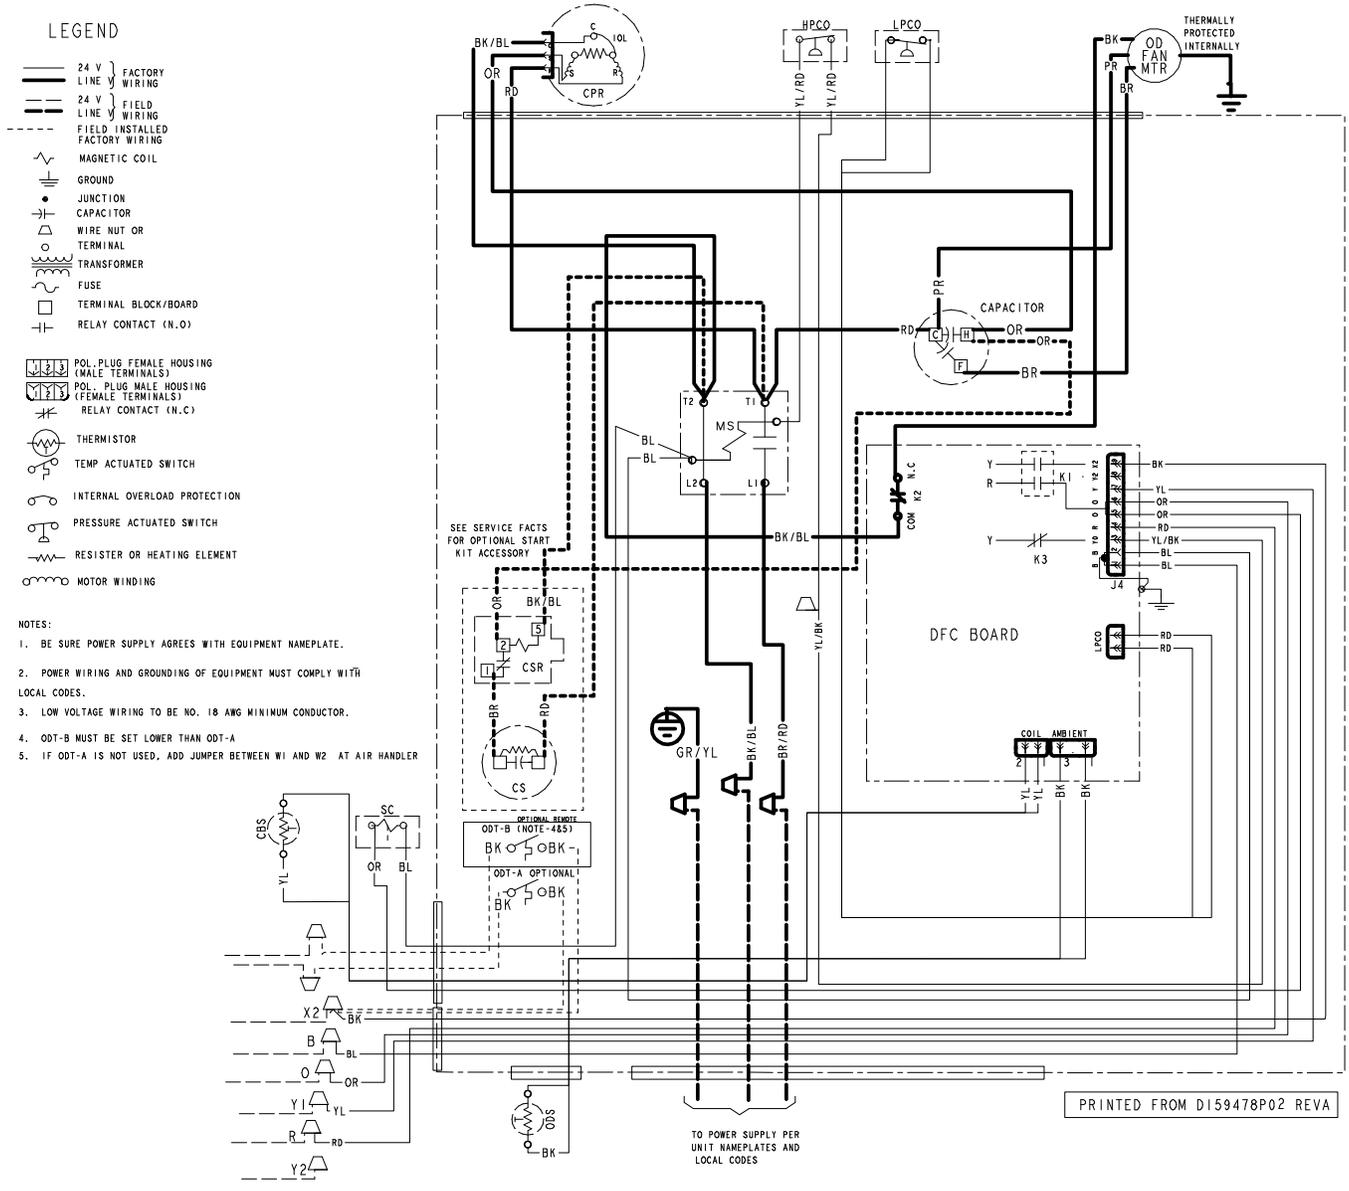


Figure 3. 2.0, 3.0 & 3.5 Ton Models

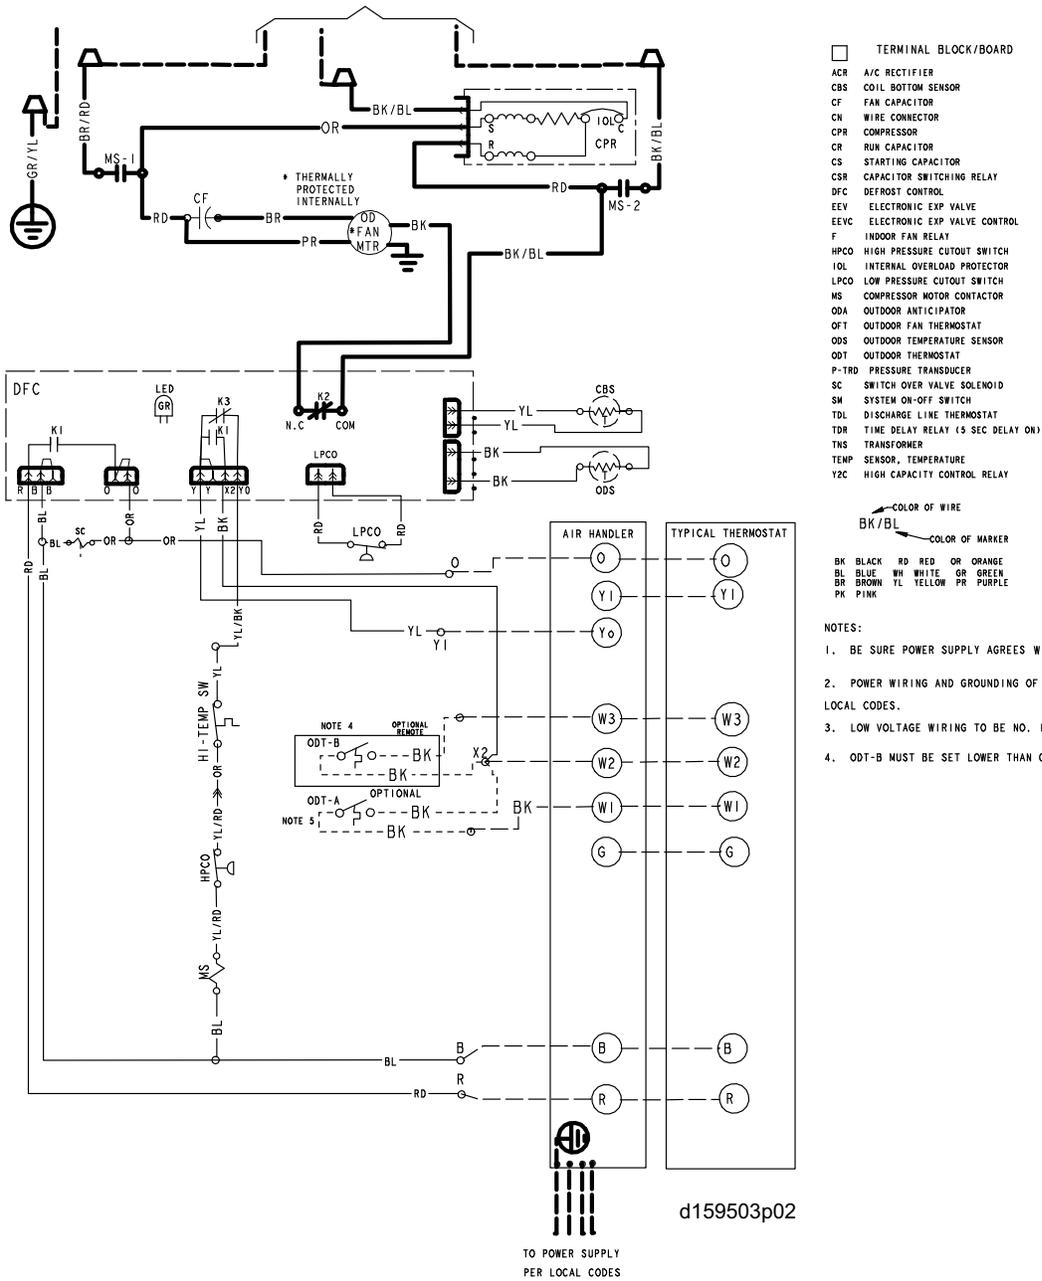


Figure 4. 2.0, 3.0 & 3.5 Ton Models


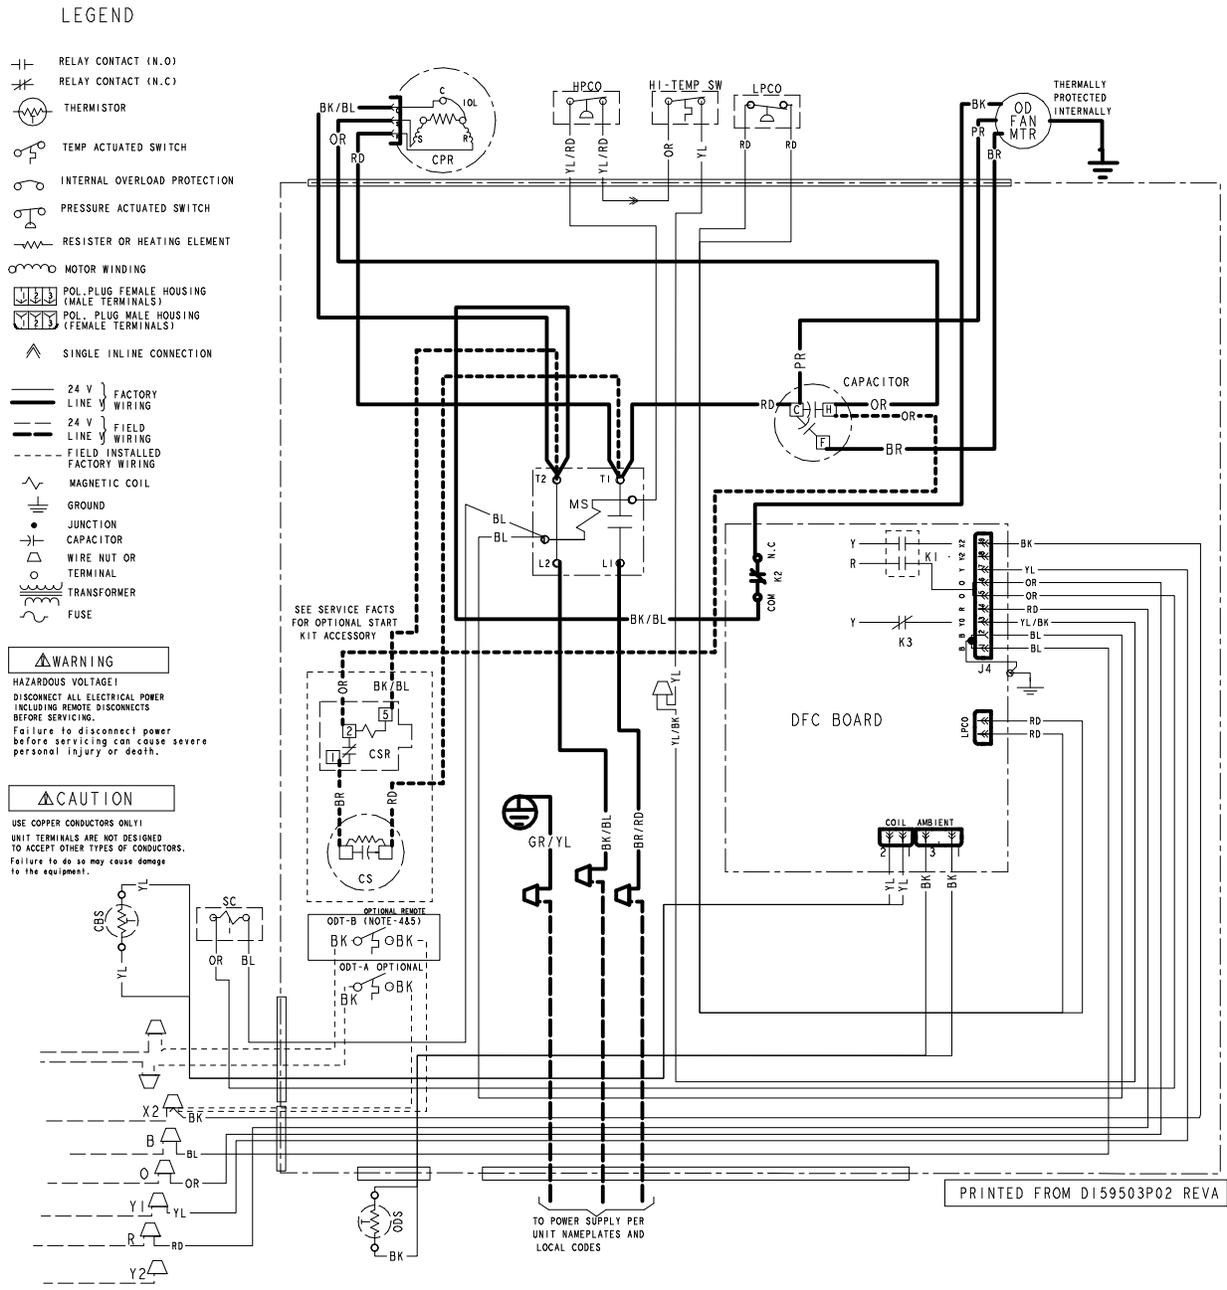


Figure 6. 4 Ton Model

- NOTES:
1. BE SURE POWER SUPPLY AGREES WITH EQUIPMENT NAMEPLATE.
 2. POWER WIRING AND GROUNDING OF EQUIPMENT MUST COMPLY WITH LOCAL CODES.
 3. LOW VOLTAGE WIRING TO BE NO. 18 AWG MINIMUM CONDUCTOR.
 4. ODT-B MUST BE SET LOWER THAN ODT-A
 5. IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 AND W2 AT AIR HANDLER

LEGEND	
	24 V } FACTORY WIRING
	24 V } FIELD WIRING
	24 V } FIELD INSTALLED LINE W/ FACTORY WIRING
	MAGNETIC COIL
	GROUND
	JUNCTION
	CAPACITOR
	WIRE NUT OR CONNECTOR
	TERMINAL
	TRANSFORMER
	FUSE
	TERMINAL BLOCK/BOARD
	RELAY CONTACT (N.O)
	RELAY CONTACT (N.C)
	THERMISTOR
	TEMP ACTUATED SWITCH
	PRESSURE ACTUATED SWITCH
	MOTOR WINDING
	POL. PLUG FEMALE HOUSING (MALE TERMINALS)
	POL. PLUG MALE HOUSING (FEMALE TERMINALS)
	SINGLE INLINE CONNECTION

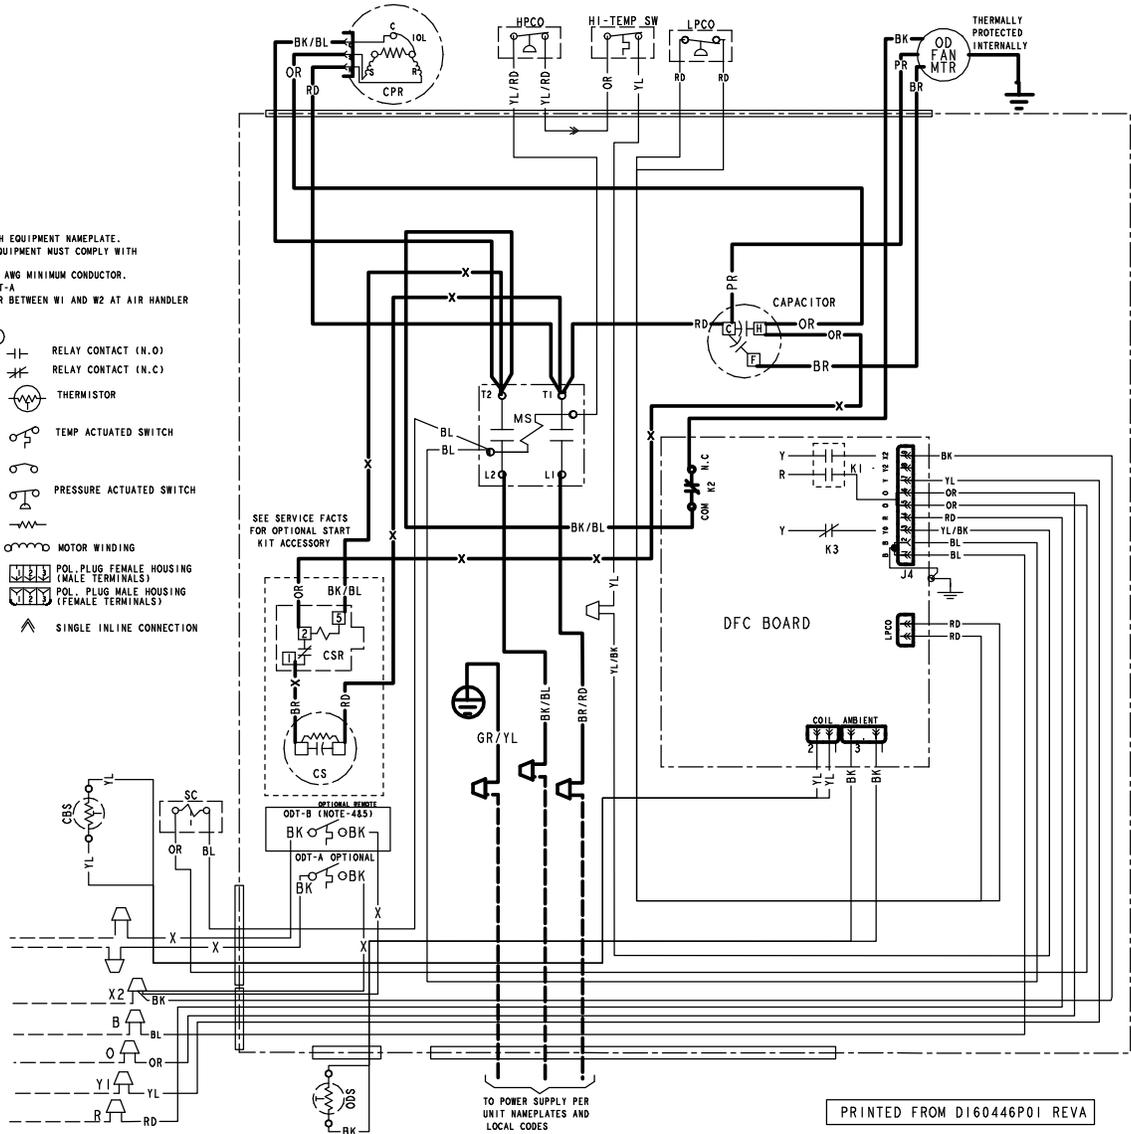

PRINTED FROM D160446P01 REVA



Mechanical Specification Options

General

The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 1995. Exterior is designed for outdoor application.

Casing

Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish. The corner panels are prepainted. All panels are subjected to our 1,000 hour salt spray test.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor and low and high pressure switches. A factory supplied, field installed liquid line drier is standard.

Compressor

The compressor features internal over temperature and pressure protection. Other features include: Centrifugal oil pump and low vibration and noise.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Low Ambient Cooling

As manufactured, this system has a cooling capacity to 55°F. The addition of an evaporator defrost control permits operation to 40°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30°F.

The addition of the BAYLOAM107A low ambient kit permits ambient cooling to 20°F.

Thermostats—Cooling only and heat/cooling (manual and automatic change over). Sub-base to match thermostat and locking thermostat cover.



Trane - by Trane Technologies (NYSE: TT), a global innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit trane.com or tranetechnologies.com.



The AHRI Certified mark indicates Trane U.S. Inc. participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

Trane has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.