




# Product and Submittal Data

## Heat Pump with WeatherGuard™

5TWX6018A1000A  
5TWX6024A1000A  
5TWX6030A1000A  
5TWX6036A1000A  
5TWX6042A1000A  
5TWX6048A1000A  
5TWX6060A1000A

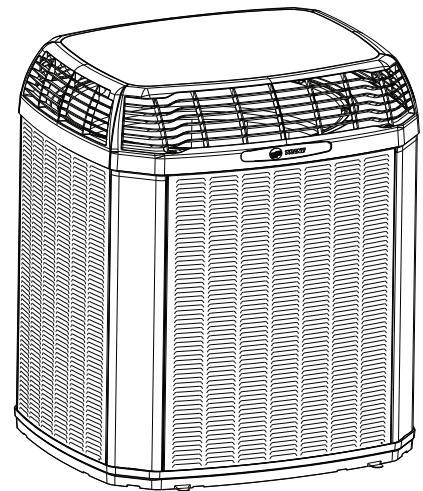

**Note:** Graphics in this document are for representation only.  
Actual model may differ in appearance.



# Introduction

## Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

## Trademark

All trademarks referenced in this document are the trademarks of their respective owners.



# Table of Contents

Product Specifications .....	4
Sound Power Level .....	7
Accessory Description and Usage .....	8
Model Nomenclature .....	9
Wiring Diagrams .....	10
Dimensional Data .....	13
Mechanical Specification Options .....	14



# Product Specifications

**Table 1. 5TWX6018, 5TWX6024, 5TWX6030, and 5TWX6036 models**

Model No. <sup>(a)</sup> <sup>(b)</sup>	5TWX6018A1000A	5TWX6024A1000A	5TWX6030A1000A	5TWX6036A1000A
Power Conns.. – V/Ph/Hz <sup>(c)</sup>	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
Min. BRCH. CIR. Ampacity	12	13	16	19
BR. CIR. PROT. RTG. – Max. (Amps)	20	20	25	30
<b>Compressor</b>	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL
No. Used – No. Stages	1 – 1	1 – 1	1 – 1	1 – 1
Volts/Ph/Hz	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
RL Amps <sup>(d)</sup> – LR Amps	7.8 - 47.5	9.1 - 75.9	10.4 - 71.0	13.5 - 75
Factory Installed				
Start Components <sup>(e)</sup>	No (Uses BAYKSKT263)	No (Uses BAYKSKT263)	No (Uses BAYKSKT263)	No (Uses BAYKSKT263)
Insulation/ Sound Blanket	NO	NO	NO	NO
Compressor Heat	NO	NO	NO	NO
<b>Outdoor Fan</b>	PROPELLER	PROPELLER	PROPELLER	PROPELLER
DIA. (in.) – No. Used	23 – 1	23 – 1	23 – 1	27.5 – 1
Type Drive – No. Speeds	DIRECT – 1	DIRECT – 1	DIRECT – 1	DIRECT – 1
CFM @ 0.0 (in.) W.G. <sup>(f)</sup>	2980	2980	2820	4230
No. Motors – HP	1 – 1/8	1 – 1/8	1 – 1/8	1 – 1/8
Motor Speed R.P.M.	850	850	850	850
Volts/Ph/Hz	208/230/1/60	208/230/1/60	208/230/1/60	200/230/1/60
F.L. AMPS	0.64	0.64	0.64	0.64
<b>Outdoor Coil – Type</b>	SPINE FIN™	SPINE FIN™	SPINE FIN™	SPINE FIN™
Rows – F.P.I.	1 – 24	1 – 24	1 – 24	1 – 24
Face Area (Sq. Ft.)	18.75	18.75	16.3	24
Tube Size (in.)	3/8	3/8	3/8	3/8
Refrigerant Control	Expansion Valve	Expansion Valve	Expansion Valve	Expansion Valve
<b>Refrigerant</b>				
LBS. – R-454B (O.D. Unit) <sup>(g)</sup>	4 LBS., 12 OZ	4 LBS., 10 OZ	4 LBS., 10 OZ	5 LBS., 10 OZ
Factory Supplied	YES	YES	YES	YES
Line Size – (in.) O.D. Gas <sup>(h)</sup> <sup>(i)</sup>	3/4	3/4	3/4	3/4
Line Size – (in.) O.D. Liq.	5/16	5/16	5/16	5/16
<b>Charging Specifications</b>				
Subcooling	9°F	12°F	12°F	10°F
<b>Dimensions</b>	H x W x D			
Crated (in.)	42.9 x 30 x 33	42.9 x 30 x 33	42.9 x 30 x 33	43.8 x 35 x 37.9
<b>Weight</b>				
Shipping (lbs.)	218	218	218	266

**Table 1. 5TWX6018, 5TWX6024, 5TWX6030, and 5TWX6036 models (continued)**

Net (lbs.)	184	184	184	232
<b>Optional Accessories:</b>				
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control	—	—	—	—
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Extreme Condition Mount Kit	BAYECMT023	BAYECMT023	BAYECMT004	BAYECMT004
Start Kit	—	—	BAYKSKT263	BAYKSKT263
Crankcase Heater Kit	BAYCCHT302	BAYCCHT302	BAYCCHT302	BAYCCHT302
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001	BAYSEAC001
Low Ambient Kit	BAYLOAM107	BAYLOAM107	BAYLOAM107	BAYLOAM107
Refrigerant Lineset <sup>(i)</sup>				

<sup>(a)</sup> Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

<sup>(b)</sup> Rated in accordance with AHRI standard 270.

<sup>(c)</sup> Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

<sup>(d)</sup> This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.

<sup>(e)</sup> No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

<sup>(f)</sup> Standard Air— Dry Coil— Outdoor

<sup>(g)</sup> This value approximate. For more precise value see unit nameplate.

<sup>(h)</sup> Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006-xx) for long line sets or specialty applications (xx denotes latest revision).

<sup>(i)</sup> The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. Always verify proper system charge via subcooling (TXV/EEV) or superheat (fixed orifice) per the unit nameplate.

<sup>(j)</sup> 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

**Table 2. 5TWX6042, 5TWX6048, and 5TWX6060 models**

Model No. <sup>(a) (b)</sup>	5TWX6042A1000A	5TWX6048A1000A	5TWX6060A1000A
Power Conns. — V/Ph/Hz <sup>(c)</sup>	208/230/1/60	208/230/1/60	208/230/1/60
Min. BRCH. CIR. Ampacity	24	25	33
BR. CIR. PROT. RTG. — Max. (Amps)	40	40	50
<b>Compressor</b>	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL
No. Used — No. Stages	1 — 1	1 — 1	1 — 1
Volts/Ph/Hz	208/230/1/60	208/230/1/60	208/230/1/60
RL Amps <sup>(d)</sup> — LR Amps	16.9 — 104.7	18.1 — 95.0	22.3 — 136.6
Factory Installed			
Start Components <sup>(e)</sup>	No (Uses BAYKSKT263)	No (Uses BAYKSKT263)	No (Uses BAYKSKT263)
Insulation/ Sound Blanket	NO	NO	NO
Compressor Heat	NO	NO	NO
<b>Outdoor Fan</b>	PROPELLER	PROPELLER	PROPELLER
DIA. (in.) — No. Used	27.5 — 1	27.5 — 1	27.5 — 1
Type Drive — No. Speeds	DIRECT — 1	DIRECT — 1	DIRECT — 1
CFM @ 0.0 (in.) W.G. <sup>(f)</sup>	4992	4992	4992
No. Motors — HP	1 — 1/3	1 — 1/3	1 — 1/3
Motor Speed R.P.M.	850	850	850
Volts/Ph/Hz	200/230/1/60	200/230/1/60	200/230/1/60



## Product Specifications

**Table 2. 5TWX6042, 5TWX6048, and 5TWX6060 models (continued)**

F.L. AMPS	2.80	2.80	2.80
<b>Outdoor Coil – Type</b>	SPINE FIN™	SPINE FIN™	SPINE FIN™
Rows – F.P.I.	2 – 24	2 – 24	2 – 24
Face Area (Sq. Ft.)	30.8	30.8	30.8
Tube Size (in.)	3/8	3/8	3/8
Refrigerant Control	Expansion Valve	Expansion Valve	Expansion Valve
<b>Refrigerant</b>			
LBS. – R-454B (O.D. Unit) <sup>(g)</sup>	7 LBS., 14 OZ	8 LBS., 9 OZ	8 LBS., 6 OZ
Factory Supplied	YES	YES	YES
Line Size – (in.) O.D. Gas <sup>(h) (i)</sup>	7/8	7/8	7/8
Line Size – (in.) O.D. Liq.	5/16	5/16	5/16
<b>Charging Specifications</b>			
Subcooling	10°F	10°F	10°F
<b>Dimensions</b>	H x W x D		
Crated (in.)	55.8 x 35 x 37.9	55.8 x 35 x 37.9	55.8 x 35 x 37.9
<b>Weight</b>			
Shipping (lbs.)	311	311	311
Net (lbs.)	261	261	261
<b>Optional Accessories:</b>			
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control	—	—	—
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101
Extreme Condition Mount Kit	BAYECMT004	BAYECMT004	BAYECMT004
Start Kit	BAYKSKT263	BAYKSKT263	BAYKSKT263
Crankcase Heater Kit	BAYCCHT301	BAYCCHT301	BAYCCHT301
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001
Low Ambient Kit	BAYLOAM103	BAYLOAM103	BAYLOAM103
Refrigerant Lineset <sup>(i)</sup>			

(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

(b) Rated in accordance with AHRI standard 270.

(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

(d) This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.

(e) No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

(f) Standard Air– Dry Coil– Outdoor

(g) This value approximate. For more precise value see unit nameplate.

(h) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006-xx) for long line sets or specialty applications (xx denotes latest revision).

(i) The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. Always verify proper system charge via subcooling (TXV/EEV) or superheat (fixed orifice) per the unit nameplate.

(j) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.



# Sound Power Level

Table 3. Sound power level

Model	A-Weighted Sound Power Level [dB(A)]	Full Octave Sound Power(dB)							
		63 Hz*	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
5TWX6018A	71	77	72	68	68	69	60	53	47
5TWX6024A	71	77	72	68	68	69	60	53	47
5TWX6030A	71	77	72	68	68	69	60	53	47
5TWX6036A	70	75	69	68	68	66	62	57	51
5TWX6042A	72	77	75	72	70	67	62	59	52
5TWX6048A	72	77	75	72	70	67	62	59	52
5TWX6060A	72	77	75	72	70	67	62	59	52

Note: Rated in accordance with AHRI Standard 270–2008 \*For Reference Only



## Accessory Description and Usage

**Anti-Short Cycle Timer** — Solid state timing device that prevents compressor recycling until five (5) minutes have elapsed after satisfying call or power interruptions. Use in area with questionable power delivery, commercial applications, long lineset, etc.

**Evaporation Defrost Control** — SPST Temperature actuated switch that cycles the condenser off as indoor coil reaches freeze-up conditions. Used for low ambient cooling to 30°F with TXV.

**Rubber Isolators** — Five (5) large rubber donuts to isolate condensing unit from transmitting energy into mounting frame or pad. Use on any application where sound transmission needs to be minimized.

**Hard Start Kit** — Start capacitor and relay to assist compressor motor start-up. Use in areas with marginal power supply, on long linesets, low ambient conditions, etc.

**Extreme Condition Mount Kit** — Bracket kits to securely mount condensing unit to a frame or pad without removing any panels. Use in areas with high winds, or on commercial roof tops, etc.

### AHRI Standard Capacity Rating Conditions

AHRI Standard 210/240 Rating Conditions

1. Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.
2. High Temperature Heating 47°F DB, 43°F WB air entering outdoor coil, 70°F DB air entering indoor coil.
3. Low Temperature Heating 17°F DB air entering indoor coil.
4. Rated indoor airflow for heating is the same as for cooling.


**AHRI Standard 270 Rating Conditions** — (Noise rating numbers are determined with the unit in cooling operations.) Standard Noise Rating number is at 95°F outdoor air.





# Model Nomenclature

## Outdoor Units

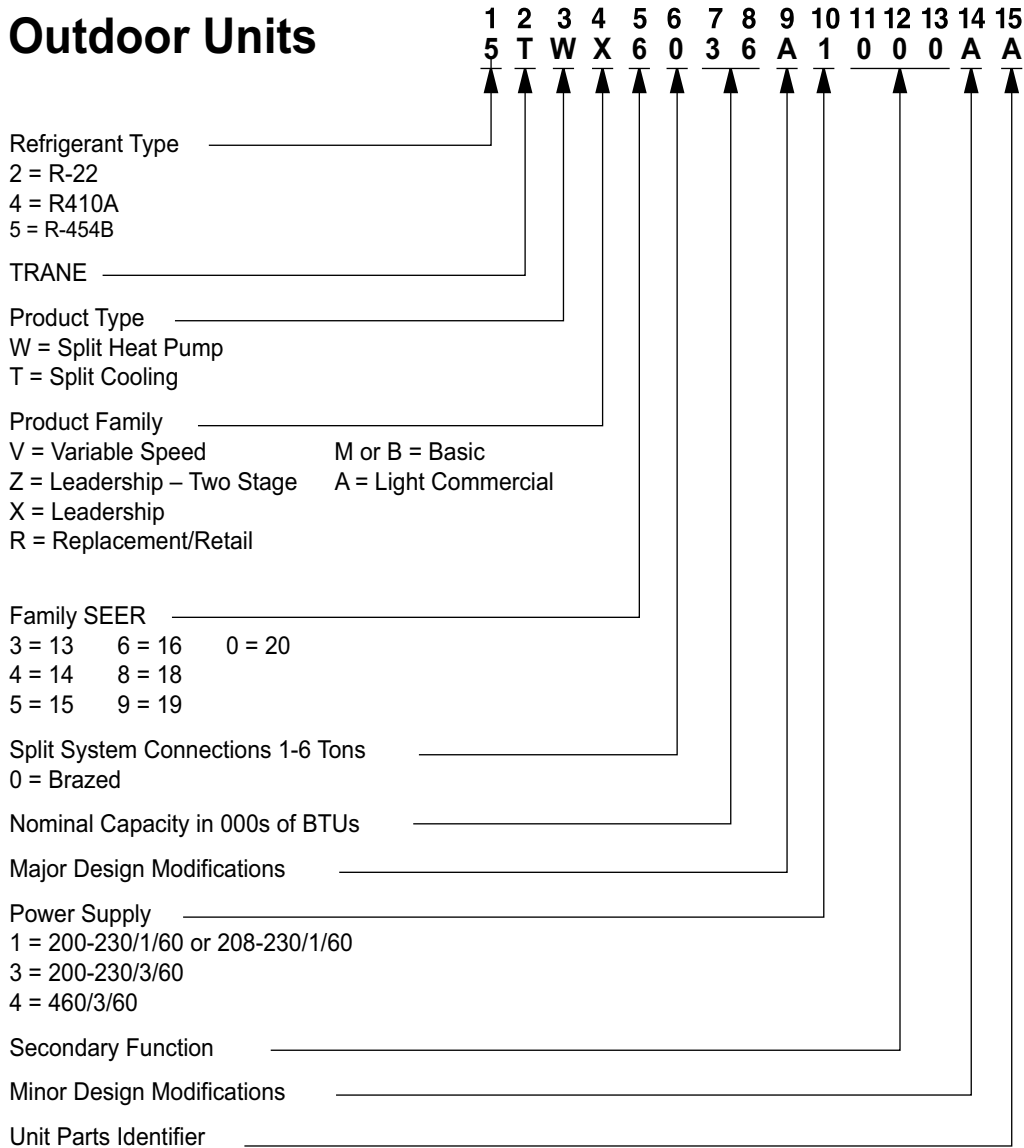



# Wiring Diagrams

Figure 1. 018A, 024A, 030A, and 036A models


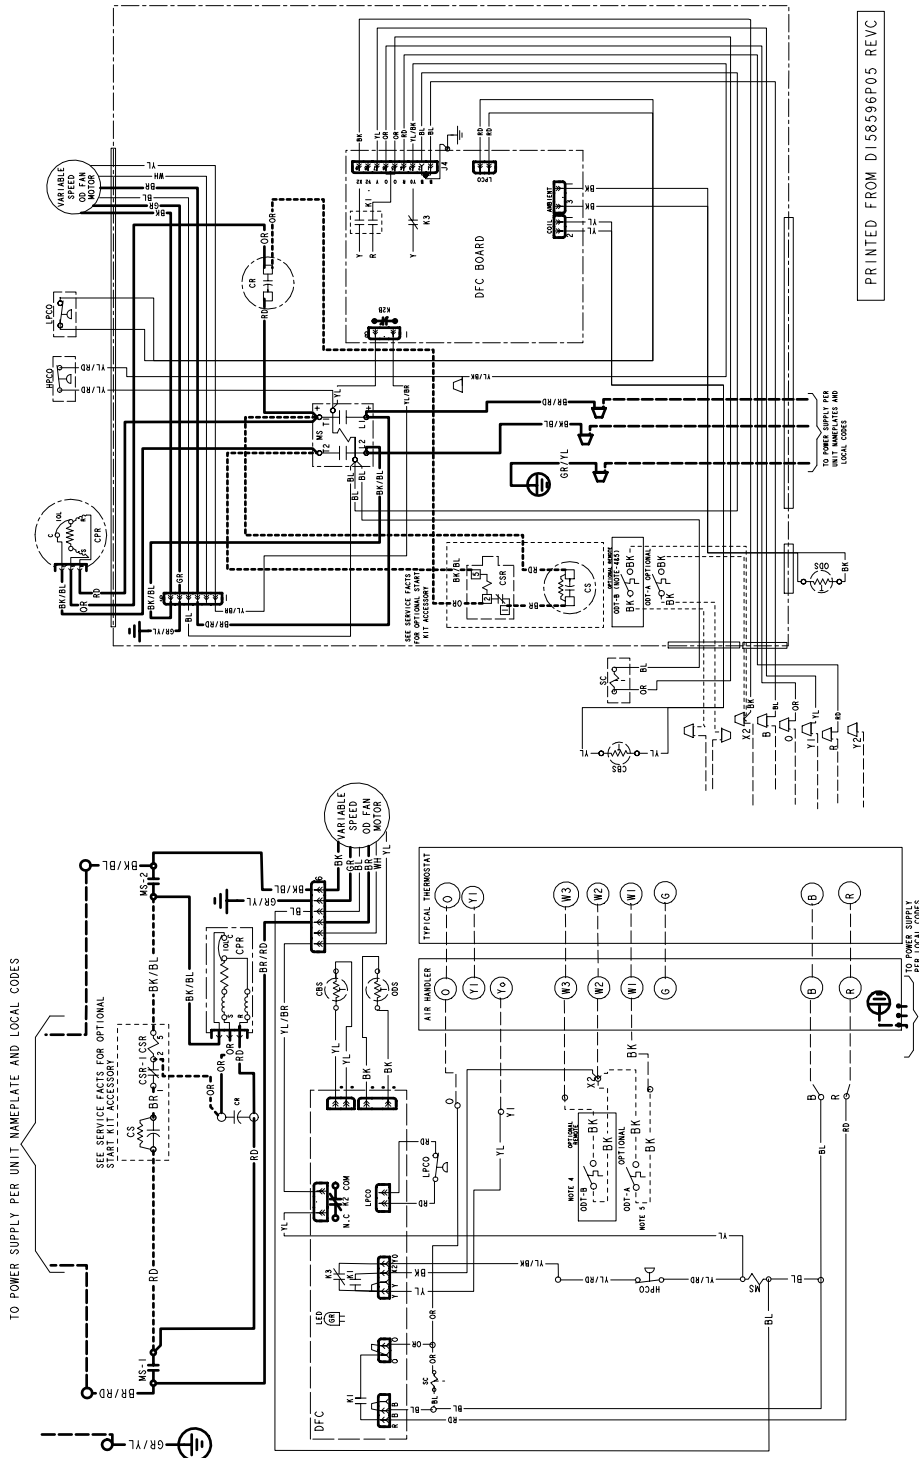


Figure 2. 042A, 048A, and 060A models



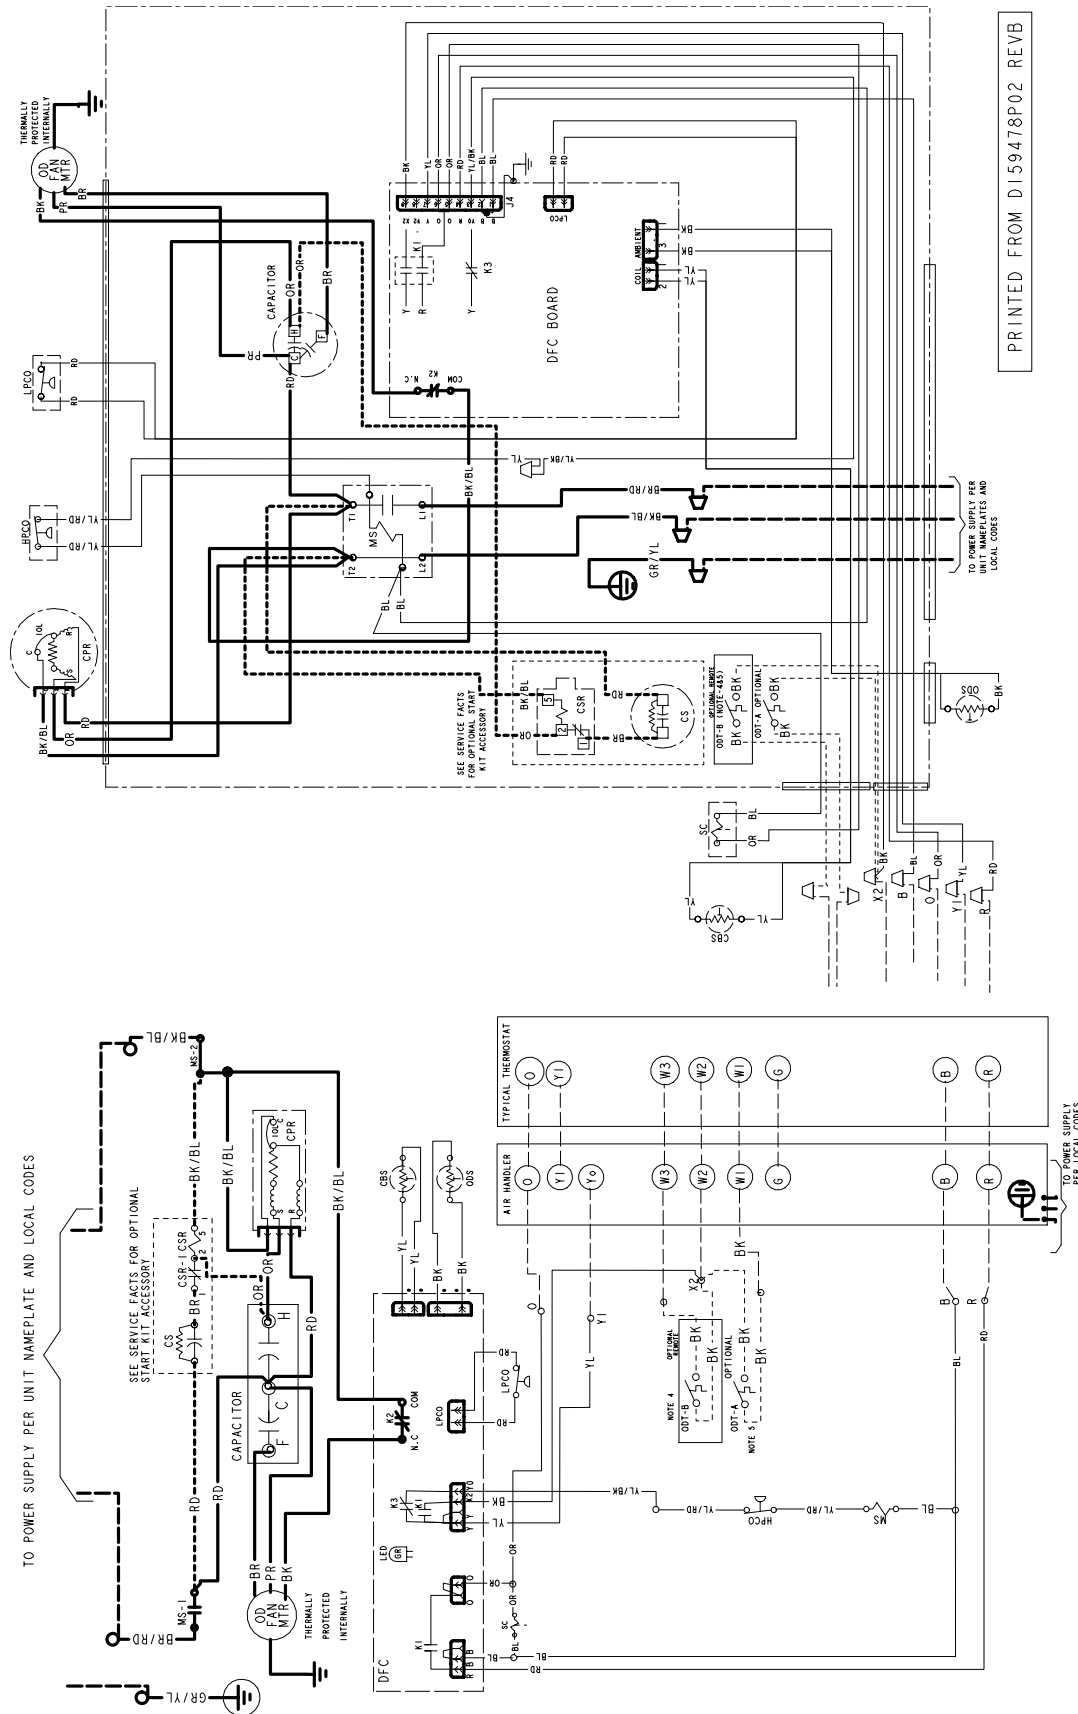

## Wiring Diagrams

**Figure 3. Legend and warnings**

**NOTES:**


1. BE SURE POWER SUPPLY AGREES WITH EQUIPMENT NAMEPLATE.
2. POWER WIRING AND GROUNDING OF EQUIPMENT MUST COMPLY WITH LOCAL CODES
3. LOW VOLTAGE WIRING TO BE NO. 18 AWG MINIMUM CONDUCTOR.
4. ODT-B MUST BE SET LOWER THAN ODT-A
5. IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 AND W2 AT AIR HANDLER
- ▲ 6. THE GROUND CONNECTIONS SHOWN HERE ARE 2 SEPARATE WIRES, DO NOT CRIMP TOGETHER  
"GR/YL 1" WIRE IS FOR GROUND LUG AND " GR/YL 2" IS FOR GROUND WIRE/WIRE NUT OPTION.

**NOTE:**

MATERIAL: WHITE POLYPROPYLENE SUITABLE FOR USE IN OUTDOOR ENVIRONMENT.

ADHESIVE: PRESSURE SENSITIVE ADHESIVE WITH RELEASE PAPER SUITABLE FOR  
OUTDOOR APPLICATION ON PAINTED OR GALVANIZED SHEET METAL SURFACES.

SIZE: 6 1/4" X 11"

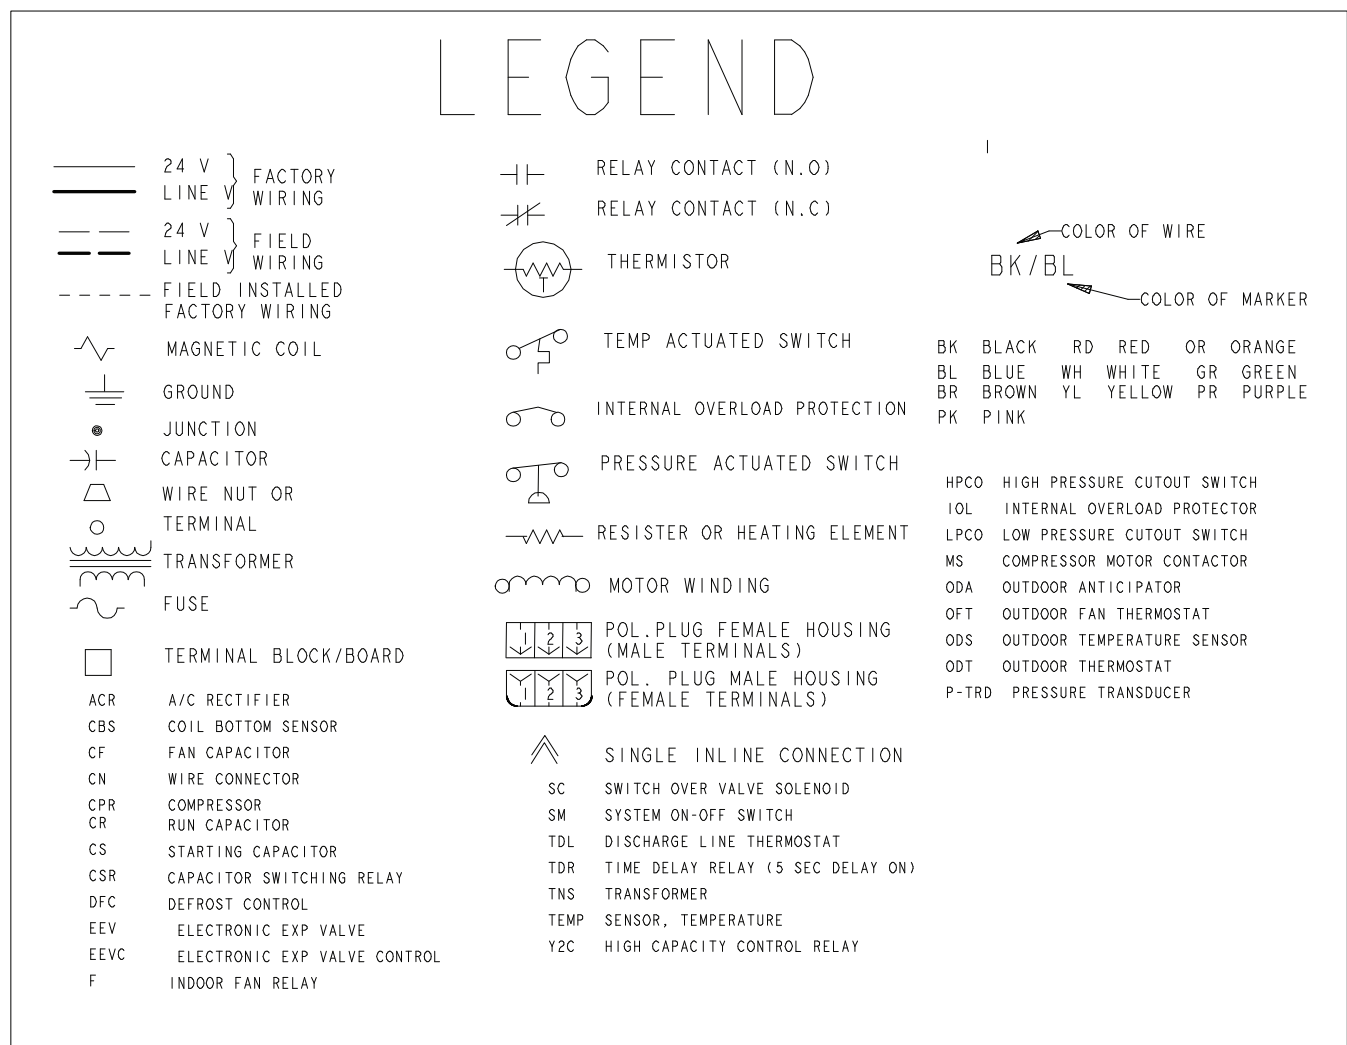

FOR CANADIAN INSTALLATIONS  
POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON  
SYSTEMS EXCEEDING 150V-TO-GROUND  
ATTENTION: NE CONVIENT PAS AUX  
INSTALLATIONS DE PLUS DE 150 V A  
LA TERRE

### CAUTION


USE COPPER CONDUCTORS ONLY!  
UNIT TERMINALS ARE NOT DESIGNED  
TO ACCEPT OTHER TYPES OF CONDUCTORS.  
Failure to do so may cause damage  
to the equipment.

### WARNING

HAZARDOUS VOLTAGE!  
DISCONNECT ALL ELECTRICAL POWER  
INCLUDING REMOTE DISCONNECTS  
BEFORE SERVICING.  
FAILURE TO DISCONNECT POWER  
BEFORE SERVICING CAN CAUSE SEVERE  
PERSONAL INJURY OR DEATH.

# Dimensional Data

**Figure 4. Dimensional drawing**

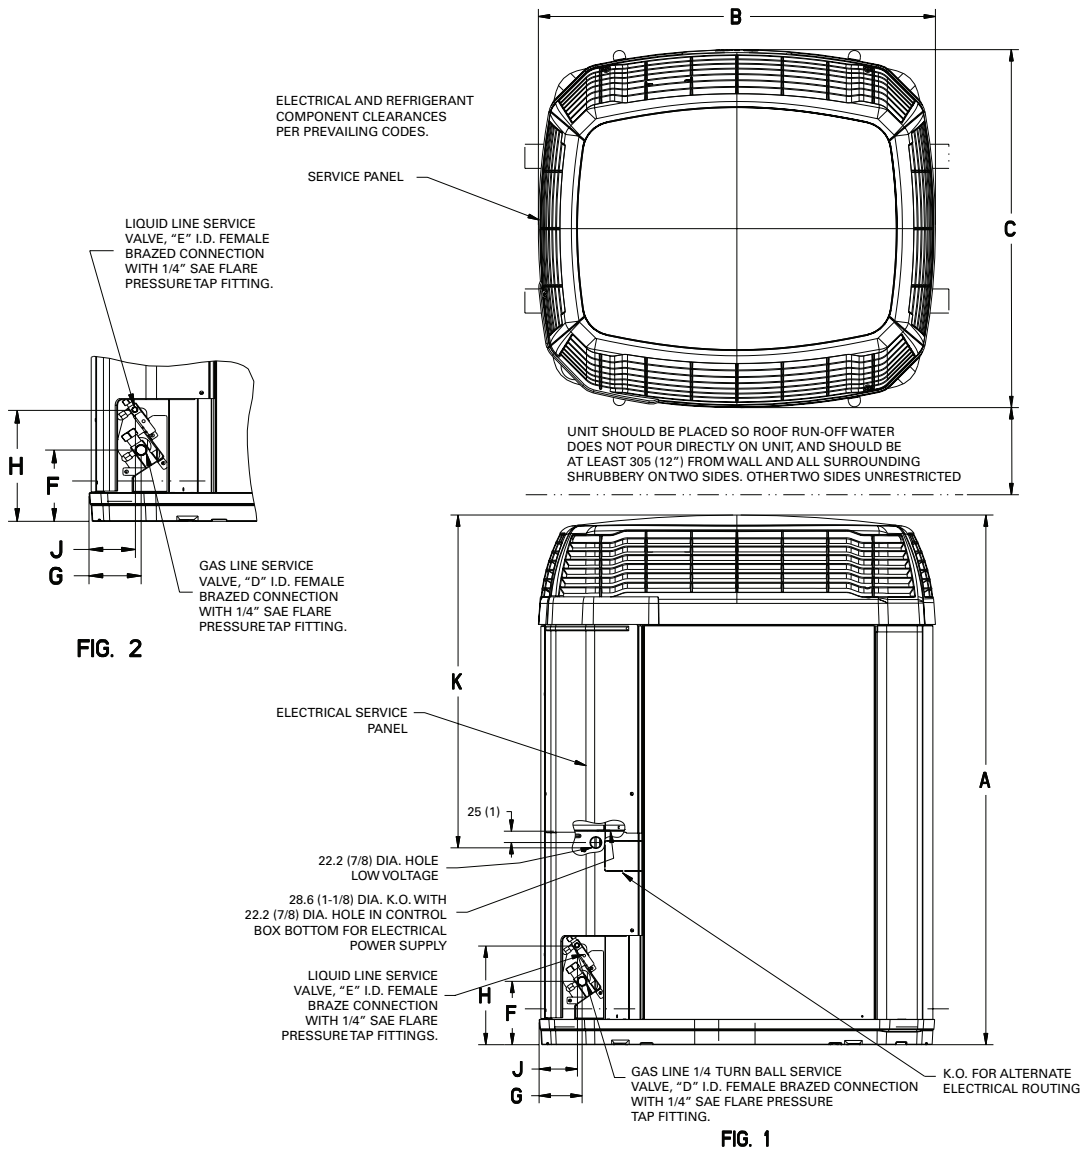

**Table 4. Unit dimensions – mm/inches**

Model	Base	A	B	C	D	E	F	G	H	J	K
5TWX6018A	3	975.106 (38.39)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	143 (5-5/8)	92 (3-5/8)	219 (8-5/8)	86 (3-3/8)	651.106 (25.64)
5TWX6024A	3	975.106 (38.39)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	143 (5-5/8)	92 (3-5/8)	219 (8-5/8)	86 (3-3/8)	651.106 (25.64)
5TWX6030A	3	975.106 (38.39)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	143 (5-5/8)	92 (3-5/8)	219 (8-5/8)	86 (3-3/8)	651.106 (25.64)
5TWX6036A	4	1001.00 (39.400)	946 (37-1/4)	870 (34-1/4)	3/4	5/16	143 (5-5/8)	98 (3-5/8)	219 (8-5/8)	79 (3-1/8)	668.024 (26.31)
5TWX6042A	4	1307.024 (51.435)	946 (37-1/4)	870 (34-1/4)	3/4	5/16	143 (5-5/8)	98 (3-5/8)	219 (8-5/8)	86 (3-3/8)	668.024 (26.31)
5TWX6048A	4	1307.024 (51.435)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	143 (5-5/8)	98 (3-5/8)	219 (8-5/8)	86 (3-3/8)	668.024 (26.31)
5TWX6060A	4	1307.024 (51.435)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	143 (5-5/8)	98 (3-5/8)	219 (8-5/8)	86 (3-3/8)	668.024 (26.31)



# Mechanical Specification Options

## General

The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 60335-2-40. Exterior is designed for outdoor application.

## Casing

Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish. The corner panels are prepainted. All panels are subjected to our 1,000 hour salt spray test.

## Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor and low and high pressure switches. A factory supplied, field installed liquid line drier is standard.

## Compressor

The compressor features internal over temperature and pressure protection. Other features include: Centrifugal oil pump and low vibration and noise.

## Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

## Low Ambient Cooling

As manufactured, this system has a cooling capacity to 55°F. The addition of an evaporator defrost control permits operation to 40°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30°F.

The addition of the BAYLOAM107A low ambient kit permits ambient cooling to 20°F.

The addition of the BAYLOAM108 low ambient kit permits ambient cooling to 20°F.

**Thermostats** – Cooling only and heat/cooling (manual and automatic change over). Sub-base to match thermostat and locking thermostat cover.





Trane - by Trane Technologies (NYSE: TT), a global innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit [trane.com](http://trane.com) or [tranetechnologies.com](http://tranetechnologies.com).



The AHRI Certified mark indicates Trane U.S. Inc. participation in the AHRI Certification program. For verification of individual certified products, go to [ahridirectory.org](http://ahridirectory.org).

Trane has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.