




Product and Submittal Data

EarthWise™ Hybrid Dual Fuel Packaged System Single Packaged Dual Fuel, Priority, Convertible

5DCZ5024A1060A
5DCZ5030A1070A
5DCZ5036A1070B
5DCZ5042A1090A
5DCZ5048A1090B
5DCZ5060A1115A

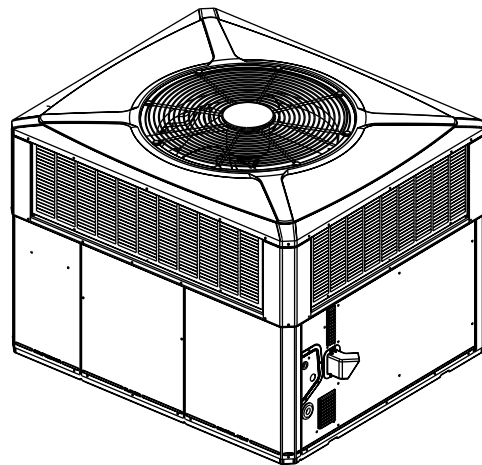

*Note: Graphics in this document are for representation only.
Actual model may differ in appearance.*



Introduction

Packaged Convertible Dual Fuel System

Trane offers a complete family of dual fuel heating and cooling systems, designed to keep you comfortable all year long, regardless of the weather, while keeping your operating costs as low as possible. The heat pump operates efficiently as both an air conditioner and a heater. In the summer, the heat pump cools your home just like any other air conditioner by pulling the heat from the inside and releasing it outdoors. In the winter, it captures the heat that is always present in the outdoor air and transfers it indoors. The gas furnace provides additional heating capacity for cooler weather.

Single Packaged Convertible Dual Fuel Systems are easy and versatile to install.

Because cooling and heating functions are all contained in a single cabinet, Trane packaged dual fuel system is easy to install and service. It can be flush mounted beside your home at ground level or placed on the roof for horizontal or downflow installation. When connected to a *CONT402, 802, or 803 comfort control, and air distribution ducts, you have a highly efficient, total home comfort system.

Single Packaged Dual Fuel Systems are unmatched in quality and reliability.

All major components on these products, including the compressor, have been designed and manufactured for maximum service. Every Climatuff® compressor is designed and manufactured to exacting specifications. Each design is life tested in extreme environments to ensure reliable and long lasting operation in normal applications. Each compressor has internal motor protection for added reliability.

Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

Trademark

All trademarks referenced in this document are the trademarks of their respective owners.

Revision History

- Updated 14th digit in model number on cover page.
- Updated the table in the Product Specification chapter.



Table of Contents

Optional Equipment Listing	4
Product Specifications	5
Indoor Fan Performance	7
Wiring Diagrams	10
Full Perimeter Roof Mounting Curb	14
Optional Equipment — Filter Rack	16
Optional Equipment — Economizer	17
Optional Equipment — Outside Air Damper	18
Dimensional Data	19
Mechanical Specifications	22



Optional Equipment Listing

Table 1. Optional equipment list for 5DCZ5 packaged units (check mark [✓] indicates accessories included)

Hinged Filter Access Door (5DCZ5024-036) ^(a)	BAYACCDOR1A[]
Hinged Filter Access Door (5DCZ5042-060) ^(a)	BAYACCDOR2A[]
Roof Curb Full Perimeter (5DCZ5024-036) ^(b)	BAYCURB050B[]
Roof Curb Full Perimeter (5DCZ5042-060) ^(b)	BAYCURB051B[]
Roof Curb Utility Extension Kit (5DCZ5024-036)	BAYUTIL101B[]
Roof Curb Utility Extension Kit (5DCZ5042-060)	BAYUTIL102B[]
Outside Air Control for V S Economizer (5DCZ5024-060) ^(c)	BAYOSAC001C[]
0-25% Motorized Outside Air Damper (5DCZ5024-036)	BAYDMPR101A[]
0-25% Motorized Outside Air Damper (5DCZ5042-060)	BAYDMPR102A[]
0-25% Manual Fresh Air Damper (5DCZ5024-036) ^(d)	BAYOSAH001A[]
0-25% Manual Fresh Air Damper (5DCZ5042-060) ^(d)	BAYOSAH002A[]
0-100% Mod Economizer with Baro Relief (5DCZ5024-036) ^{(d)(e)(f)}	BAYECON107A[]
0-100% Mod Economizer with Baro Relief (5DCZ5042-060) ^{(d)(e)(f)}	BAYECON108A[]
0-100% Horizontal Economizer (5DCZ5024-036) ^{(d)(e)}	BAYECON207A[]
0-100% Horizontal Economizer (5DCZ5042-060) ^{(d)(e)}	BAYECON208A[]
Economizer Relay Kit (required for Heat Pump applications)	BAYRLAY006B[]
Enthalpy Control for Economizer (solid state)	BAYENTH001A[]
Remote Potentiometer (Used with all BAYECON.)	BAYSTAT023[]
1 to 2-in. Filter Frame (5DCZ5024-036) (20 x 25 filter not included) ^(d)	BAYFLTR101C[]
1 to 2-in. Filter Frame (5DCZ5042-060) (20 x 20,20X18 filter not included) ^(d)	BAYFLTR201C[]
Evaporator Defrost Control (Low Ambient Cooling) Kit ^(g)	BAYLOAM011A[]
Head Pressure Control (Low Ambient Cool) (208/240v) Kit ^(g)	BAYLOAM105A[]
Crankcase Heater Scroll (5DCZ5048, 060)(230v) ^(g)	BAYCCHT102A[]
Crankcase Heater Scroll (5DCZ5024-036)(230v) ^(g)	BAYCCHT103A[]
Adapter Curb 5DCZ5024-036 to BAYCURB030,38	BAYADAP050A[]
Adapter Curb 5DCZ5024-036 to BAYCURB033	BAYADAP051A[]
Adapter Curb 5DCZ5042-060A to BAYCURB030,38	BAYADAP052A[]
Adapter Curb 5DCZ5042-060A to BAYCURB033	BAYADAP053A[]
Adapter Curb 5DCZ5042-060A to BAYCURB034	BAYADAP054A[]
12-in. Duct Shroud Covers Horizontal 5DCZ5024-060 ^(h)	BAYCOVR112A[]
18-in. Duct Shroud Covers Horizontal 5DCZ5024-060 ^(h)	BAYCOVR118A[]
Extreme Condition Mounting Kit - All BAYCURB and BAYADAP	BAYEXMK001A[]
Extreme Condition Mounting Kit - All BAYUTIL	BAYEXMK002B[]
Extreme Condition Mounting Kit - All Slab Mounts	BAYEXMK003A[]
Lifting Lug Kit (All Models)	BAYLIFT002B[]
LP Conversion Kit (All 40K and 120K Models)	BAYLPKT100C[]
LP Conversion Kit (All 64K, 70K, and 96K Models)	BAYLPKT101C[]
LP Conversion Kit (All 75K Models)	BAYLPKT102C[]
LP Conversion Kit (All 60K, 90K Models)	BAYLPKT103A[]
LP Conversion Kit (All 115K Models)	BAYLPKT104A[]
Adaptor Kit for Installation of CleanEffects and 5-in. Media Filter (Horizontal) (5DCZ5024-036)	BAYACCEADP1B[]
Adaptor Kit for Installation of CleanEffects and 5-in. Media Filter (Horizontal) (5DCZ5042-060)	BAYACCEADP2B[]

^(a) BAYACCDOR1A requires BAYFLTR101C and BAYACCDOR2A requires BAYFLTR201C. They are not backward compatible to BAYFLTR101/201A.

^(b) Ships knocked down.

^(c) BAYOSAC001C is not compatible with BAYACCDOR1A or BAYACCDOR2A.

^(d) Must use internal filter frame when economizer or fresh air kit is used.

^(e) Dry bulb control standard with economizer.

^(f) Downflow only.

^(g) Low Ambient cooling requires crankcase heater (BAYCCHT-A).

^(h) BAYCOVR112A and BAYCOVR118A will not cover 18-in. square-to-round applications.



Product Specifications

Table 2. Models - 5DCZ5024, 5DCZ5030, 5DCZ5036, 5DCZ5042, 5DCZ5048, and 5DCZ5060

Model	5DCZ5024	5DCZ5030	5DCZ5036	5DCZ5042	5DCZ5048	5DCZ5060
Rated Volts/Ph/Hz	208–230/1/60					
Performance Cooling BTUH ^(a)						
BTUH (High)	23400	29600	35400	42000	47000	57500
Indoor Airflow (CFM)	810	880	1100	1410	1600	1780
Power Input (kW)	1.94	2.64	3.12	3.55	4.09	5.06
BTUH (Low)	19200	24000	27800	34400	36600	46000
Indoor Airflow (CFM)	630	710	830	1090	1280	1290
Power Input (kW)	1.08	1.52	1.77	2.01	2.28	2.83
EER2 / SEER2	11.5/15.2	11.2/15.2	11.2/15.2	11.5/15.2	11.2/15.2	11.5/15.2
Sound Power Rating [dB(A)] ^(b)	66.8	67.3	70	72	72	80
HP Heating Performance						
(High Temp.) BTUH/COP (High)	22200/3.57	28800/3.47	33800/3.46	39000/3.76	42500/3.63	56500/3.29
Power Input (kW)	1.82	2.43	2.86	3.04	3.43	5.03
(Low Temp.) BTUH/COP (High)	13800	18600	21800	25600	28000	37800
Power Input (kW)	1.63	2.17	2.58	2.73	3.16	4.49
(High Temp.) BTUH/COP (Low)	16000/3.52	20800/3.46	23600/3.32	28600/3.84	31400/3.85	40000/3.26
Power Input (kW)	1.33	1.76	2.08	2.18	2.39	3.59
(Low Temp.) BTUH/COP (Low)	8600/2	12200/2.13	14000/2.09	16600/2.34	17200/2.2	24000/2.07
Power Input (kW)	1.26	1.68	1.96	2.08	2.29	3.4
HSPF2 (BTUH/Watt-Hr) ^(c)	7.2	7.2	7.2	7.2	7.5	7.2
Gas Heating Performance ^(d)						
Input BTUH - 1st Stage (Nat. Gas)	48600	56000	56000	72000	72000	92000
Input BTUH - 2nd Stage (Nat. Gas)	60000	70000	70000	90000	90000	115000
AFUE	81					
Temp. Rise-Min/Max (°F)	40 / 70	30 / 60	30 / 60	30 / 60	30 / 60	30 / 60
Orifice Qty / Drill Size (Nat. Gas) ^(e)	2 / #37	2 / #33	2 / #33	3 / #37	3 / #37	3 / #32
Power Conn. — V/Ph/Hz						
208–230/1/60						
Min. Brch. Cir. Ampacity ^(f)	18	23	23	30	31	40
Fuse Size — Max. (amps)	25	35	35	45	45	60
Compressor						
2 Stage Scroll						
Volts/Ph/Hz						
208–230/1/60						
R.L. Amps — L.R. Amps	10.3 / 62.0	14.6 / 82.0	14.6 / 90.0	18.2 / 106.0	18.2 / 138.0	25.2 / 147.3
Outdoor Coil — Type						
Spine Fin						
Rows/F.P.I						
2 / 24						
Face Area (sq. ft.)	15.49	15.49	15.49	23.57	23.57	23.57
Tube Size (in.)	3/8					
Indoor Coil — Type						
Plate Fin						
Rows/F.P.I	4/15	4/15	4/15	4/15	4/15	4/15
Face Area (sq. ft.)	3.45			5.0		
Tube Size (in.)	3/8					
Refrigeration Control	Expansion Valve					



Product Specifications

Table 2. Models - 5DCZ5024, 5DCZ5030, 5DCZ5036, 5DCZ5042, 5DCZ5048, and 5DCZ5060 (continued)

Model	5DCZ5024	5DCZ5030	5DCZ5036	5DCZ5042	5DCZ5048	5DCZ5060
Drain Conn. Size (in.)	3/4 Female NPT					
Outdoor Fan — Type	Propeller					
Dia. (in.)	23.4			28.0	28.0	28.3
Drive/No. SpeedS	Direct / 1					
CFM @ 0.0 in. w.g. ^(g)	2550	3000	3000	4200	4200	5500
Motor — HP/R.P.M	1/12/810	1/12/810	1/6/830	1/6/830	1/6/830	1/3/825
Volts/Ph/Hz	208–230/1/60					
F.L. Amps/L.R Amps	0.54 / 0.82	0.54 / 0.82	0.85 / 1.95	0.85 / 1.95	0.85 / 1.95	1.7 / 3.8
Indoor Fan — Type	Centrifugal					
Dia. x Width (in.)	10 X 10	10 X 10	10 X 10	11 X 10	11 x 10	11 x 10
Drive/No. Speeds	Direct/Variable					
CFM @ 0.0 in. w.g. ^(h)	See Indoor Fan Performance Tables					
Motor — HP / R.P.M.	1/2/Variable	1/2/Variable	1/2/Variable	3/4/Variable	3/4/Variable	1/Variable
Volts/Ph/Hz	208–230/1/60					
F.L. Amps	4.3 / 4.3			6.8 / 6.8		6.9 / 6.9
Combustion Fan — Type	Centrifugal					
Drive/No. Speeds	Direct/ 2					
Motor — HP / R.P.M.	1/20 / 3350 /2600					
Volts/Ph/Hz	208–230/1/60					
FLA	0.34					
Filter / Furnished	No					
Type Recommended	Throwaway					
Recmd. Face Area (sq. ft)	4.0			5.3		
Refrigerant/Charge (lbs)	R-454B / 6.8	R-454B / 7.1	R-454B / 7.1	R-454B / 7.5	R-454B / 7.2	R-454B / 9.1
Subcooling	8° F	7° F	11° F	10° F	10° F	8° F
Gas Pipe Size (in.)	1/2					
Dimensions	H X W X L					
Crated (in.)	48 X 45 X 52			52 X 47 X 62		
Weight						
Shipping (lbs.) / Net (lbs.)	490 / 394	494 / 398	491 / 395	644 / 516	670 / 542	679 / 551

^(a) Certified in accordance with the Unitary Air-Conditioner Equipment certification program, which is based on AHRI Standard 210/240. Noise calculated in accordance with AHRI Standard 270.

^(b) Sound Power values are not adjusted for AHRI 270–95 tonal corrections.

^(c) Filters must be installed in return air stream. Square footages listed are based on 300 f.p.m. face velocity. If permanent filters are used size per manufacturer's recommendation with a clean resistance of 0.05-in. W.C.

^(d) All models are certified to UL 60335. Ratings shown are for elevations up to 2000 ft. For higher elevations reduce ratings at a rate of 4% per 1000 ft. elevation.

^(e) Convertible to LPG.

^(f) This value is approximate. For more precise value, see Unit Nameplate.

^(g) Standard Air — Dry Coil — Outdoor.

^(h) Based on U.S. Government Standard Tests.



Indoor Fan Performance

Table 3. Airflow - model 5DCZ5024*1 (060)

5DCZ5024*1 (060)		Horizontal Airflow [Cooling Down Airflow]										
Motor Speed		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
350 CFM/ Ton Setting	Low	—	590 [601]	583 [588]	575 [571]	571 [562]	566 [563]	546 [549]	525 [525]	507 [517]	488 [504]	—
	High	—	721 [734]	724 [731]	727 [722]	717 [706]	706 [702]	701 [706]	695 [695]	678 [692]	660 [681]	—
400 CFM/ Ton Setting	Low	—	627 [638]	624 [622]	621 [619]	615 [617]	608 [613]	593 [600]	578 [588]	559 [575]	540 [554]	—
	High	—	801 [815]	806 [803]	811 [808]	806 [808]	800 [807]	789 [798]	777 [791]	745 [766]	712 [731]	—
450 CFM/ Ton Setting	Low	—	672 [676]	673 [676]	673 [678]	664 [668]	654 [656]	648 [646]	641 [642]	620 [641]	599 [632]	—
	High	—	880 [885]	888 [892]	895 [902]	894 [900]	893 [896]	883 [881]	872 [874]	817 [844]	761 [803]	—

Table 4. Airflow - model 5DCZ5030*1 (070)

5DCZ5030*1 (070)		Horizontal Airflow [Cooling Down Airflow]										
Motor Speed		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
350 CFM/ Ton Setting	Low	—	703 [705]	713 [712]	715 [712]	705 [703]	689 [691]	673 [682]	658 [670]	646 [653]	627 [633]	606 [610]
	High	—	888 [892]	900 [901]	911 [912]	914 [913]	912 [909]	898 [897]	881 [887]	865 [874]	847 [857]	785 [783]
400 CFM/ Ton Setting	Low	—	762 [757]	771 [767]	776 [775]	775 [766]	756 [752]	739 [740]	723 [729]	711 [718]	701 [700]	682 [677]
	High	—	998 [990]	1013 [1008]	1020 [1013]	1025 [1016]	1023 [1015]	1021 [1011]	1015 [1000]	990 [986]	963 [966]	849 [833]
450 CFM/ Ton Setting	Low	—	842 [835]	852 [848]	862 [856]	863 [857]	854 [847]	836 [834]	820 [822]	803 [810]	788 [795]	760 [743]
	High	—	1146 [1120]	1153 [1127]	1157 [1133]	1158 [1137]	1159 [1139]	1159 [1138]	1156 [1135]	1144 [1125]	1034 [1040]	922 [927]

Table 5. Airflow - model 5DCZ5036*1 (070)

5DCZ5036*1 (070)		Horizontal Airflow [Cooling Down Airflow]										
Motor Speed		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
350 CFM/ Ton Setting	Low	—	812 [808]	821 [816]	829 [818]	826 [811]	818 [795]	804 [777]	791 [762]	778 [751]	770 [742]	751 [723]
	High	—	1056 [1055]	1069 [1068]	1074 [1073]	1076 [1073]	1077 [1074]	1076 [1063]	1070 [1063]	1060 [1052]	1029 [1020]	893 [905]
400 CFM/ Ton Setting	Low	—	894 [892]	903 [898]	913 [904]	915 [904]	913 [891]	905 [873]	887 [860]	874 [845]	859 [833]	793 [803]
	High	—	1196 [1199]	1199 [1205]	1203 [1208]	1205 [1210]	1208 [1211]	1209 [1209]	1208 [1207]	1202 [1198]	1114 [1099]	994 [984]
450 CFM/ Ton Setting	Low	—	990 [988]	1002 [994]	1009 [1004]	1013 [1005]	1012 [1003]	1009 [997]	1000 [983]	989 [969]	974 [943]	866 [863]
	High	—	1369 [1381]	1370 [1381]	1372 [1383]	1374 [1381]	1375 [1382]	1375 [1369]	1370 [1373]	1300 [1298]	1199 [1194]	1091 [1085]



Indoor Fan Performance

Table 6. Airflow - model 5DCZ5042*1 (090)

5DCZ5042*1 (090)		Horizontal Airflow [Cooling Down Airflow]										
Motor Speed		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
350 CFM/ Ton Setting	Low	—	990 [980]	982 [971]	970 [957]	957 [945]	944 [937]	935 [920]	916 [902]	892 [881]	868 [860]	845 [837]
	High	—	1246 [1251]	1245 [1245]	1240 [1240]	1237 [1238]	1233 [1227]	1222 [1217]	1215 [1207]	1206 [1194]	1196 [1182]	1185 [1168]
400 CFM/ Ton Setting	Low	—	1103 [1096]	1096 [1089]	1088 [1080]	1077 [1068]	1072 [1061]	1060 [1048]	1048 [1035]	1033 [1019]	1012 [1002]	991 [983]
	High	—	1407 [1103]	1408 [1096]	1403 [1088]	1403 [1077]	1398 [1072]	1390 [1060]	1379 [1048]	1368 [1033]	1359 [1012]	1349 [991]
450 CFM/ Ton Setting	Low	—	1234 [1241]	1232 [1236]	1227 [1229]	1221 [1228]	1218 [1216]	1207 [1208]	1200 [1197]	1190 [1187]	1181 [1176]	1171 [1163]
	High	—	1571 [1587]	1575 [1589]	1584 [1586]	1580 [1579]	1575 [1573]	1568 [1561]	1563 [1551]	1556 [1539]	1547 [1529]	1540 [1516]

Table 7. Airflow - model 5DCZ5048*1 (090)

5DCZ5048*1 (090)		Horizontal Airflow [Cooling Down Airflow]										
Motor Speed		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
350 CFM/ Ton Setting	Low	—	954 [948]	973 [977]	977 [977]	973 [970]	966 [969]	957 [975]	950 [979]	944 [962]	—	—
	High	—	1363 [1354]	1390 [1396]	1396 [1396]	1390 [1386]	1379 [1384]	1368 [1393]	1358 [1399]	1349 [1375]	—	—
400 CFM/ Ton Setting	Low	—	1121 [1102]	1106 [1106]	1104 [1109]	1106 [1113]	1108 [1116]	1108 [1119]	1104 [1120]	1097 [1118]	—	—
	High	—	1601 [1574]	1580 [1580]	1577 [1585]	1580 [1589]	1583 [1594]	1583 [1599]	1577 [1601]	1567 [1597]	—	—
450 CFM/ Ton Setting	Low	—	1223 [1295]	1254 [1277]	1268 [1272]	1271 [1273]	1268 [1274]	1264 [1273]	1261 [1272]	1258 [1273]	—	—
	High	—	1747 [1851]	1792 [1824]	1811 [1817]	1816 [1818]	1812 [1820]	1806 [1819]	1801 [1817]	1797 [1819]	—	—

Table 8. Airflow - model 5DCZ5060*1 (115)

5DCZ5060*1 (115)		Horizontal Airflow [Cooling Down Airflow]										
Motor Speed		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
350 CFM/ Ton Setting	Low	—	1163 [1259]	1238 [1219]	1259 [1208]	1256 [1207]	1246 [1206]	1240 [1199]	1237 [1188]	1230 [1185]	—	—
	High	—	1662 [1799]	1768 [1742]	1799 [1726]	1794 [1725]	1780 [1723]	1771 [1712]	1767 [1698]	1757 [1692]	—	—
400 CFM/ Ton Setting	Low	—	1443 [1410]	1427 [1393]	1422 [1386]	1422 [1384]	1423 [1383]	1422 [1380]	1418 [1368]	1410 [1344]	—	—
	High	—	2062 [2015]	2038 [1990]	2031 [1980]	2032 [1977]	2034 [1976]	2032 [1971]	2025 [1955]	2015 [1920]	—	—

Table 9. Auxiliary heating airflow, horizontal or downflow from 0.2 to 0.6-inch wg - models 5DCZ5024, 5DCZ5030, and 5DCZ5036

Switch Settings		Selection	Nominal Airflow					
			5DCZ5024		5DCZ5030		5DCZ5036	
			Low Stage	High Stage	Low Stage	High Stage	Low Stage	High Stage
7-Off	8-Off	A	600	850	875	1190	850	1130
7-On	8-Off	B	625	900	915	1270	890	1200
7-Off	8-On	C	650	925	980	1345	950	1300
7-On	8-On	D	700	975	1050	1430	1020	1380

Table 10. Auxiliary heating airflow, horizontal or downflow from 0.2 to 0.6-inch wg - models 5DCZ5042, 5DCZ5048, and 5DCZ5060

Switch Settings		Selection	Nominal Airflow					
			5DCZ5042		5DCZ5048		5DCZ5060	
			Low Stage	High Stage	Low Stage	High Stage	Low Stage	High Stage
7-Off	8-Off	A	1180	1500	1075	1375	1375	1800
7-On	8-Off	B	1220	1600	1100	1450	1450	1900
7-Off	8-On	C	1260	1650	1150	1500	—	—
7-On	8-On	D	1300	1720	1200	1575	—	—

Wiring Diagrams

Figure 1. Models — 5DCZ5024A, 5DCZ5030A, 5DCZ5036A, 5DCZ5042A, and 5DCZ5048A

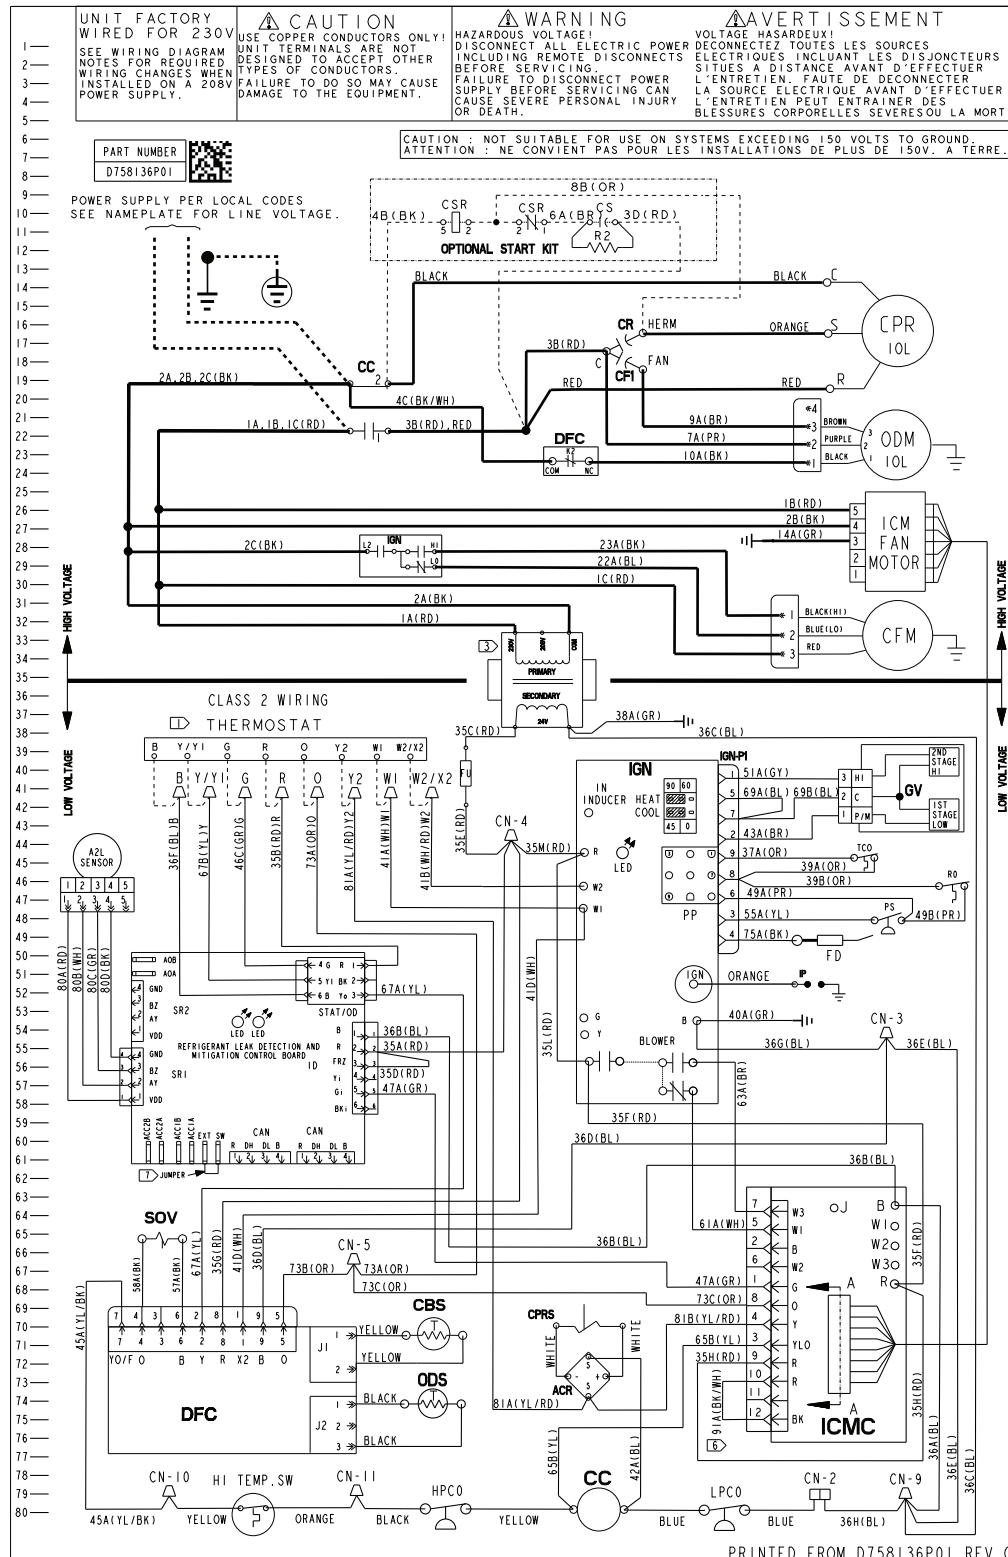


Figure 2. Models — 5DCZ5024A, 5DCZ5030A, 5DCZ5036A, 5DCZ5042A, and 5DCZ5048A

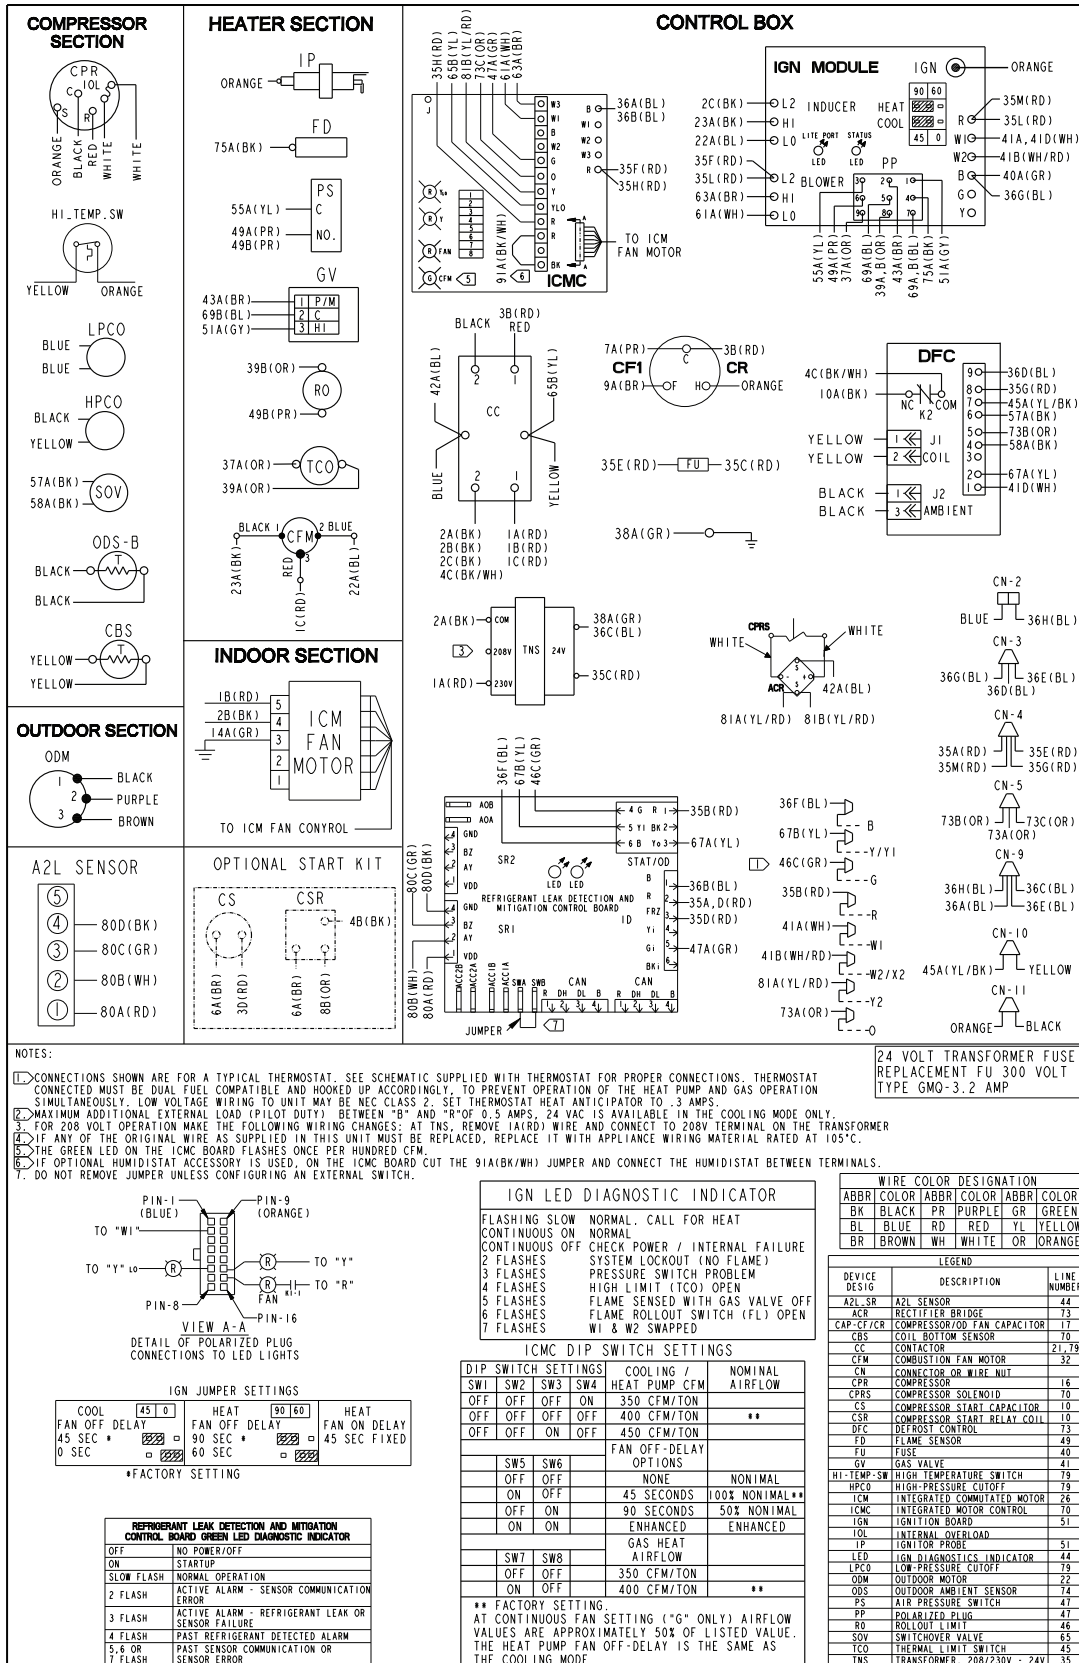


Figure 3. Model — 5DCZ5060A


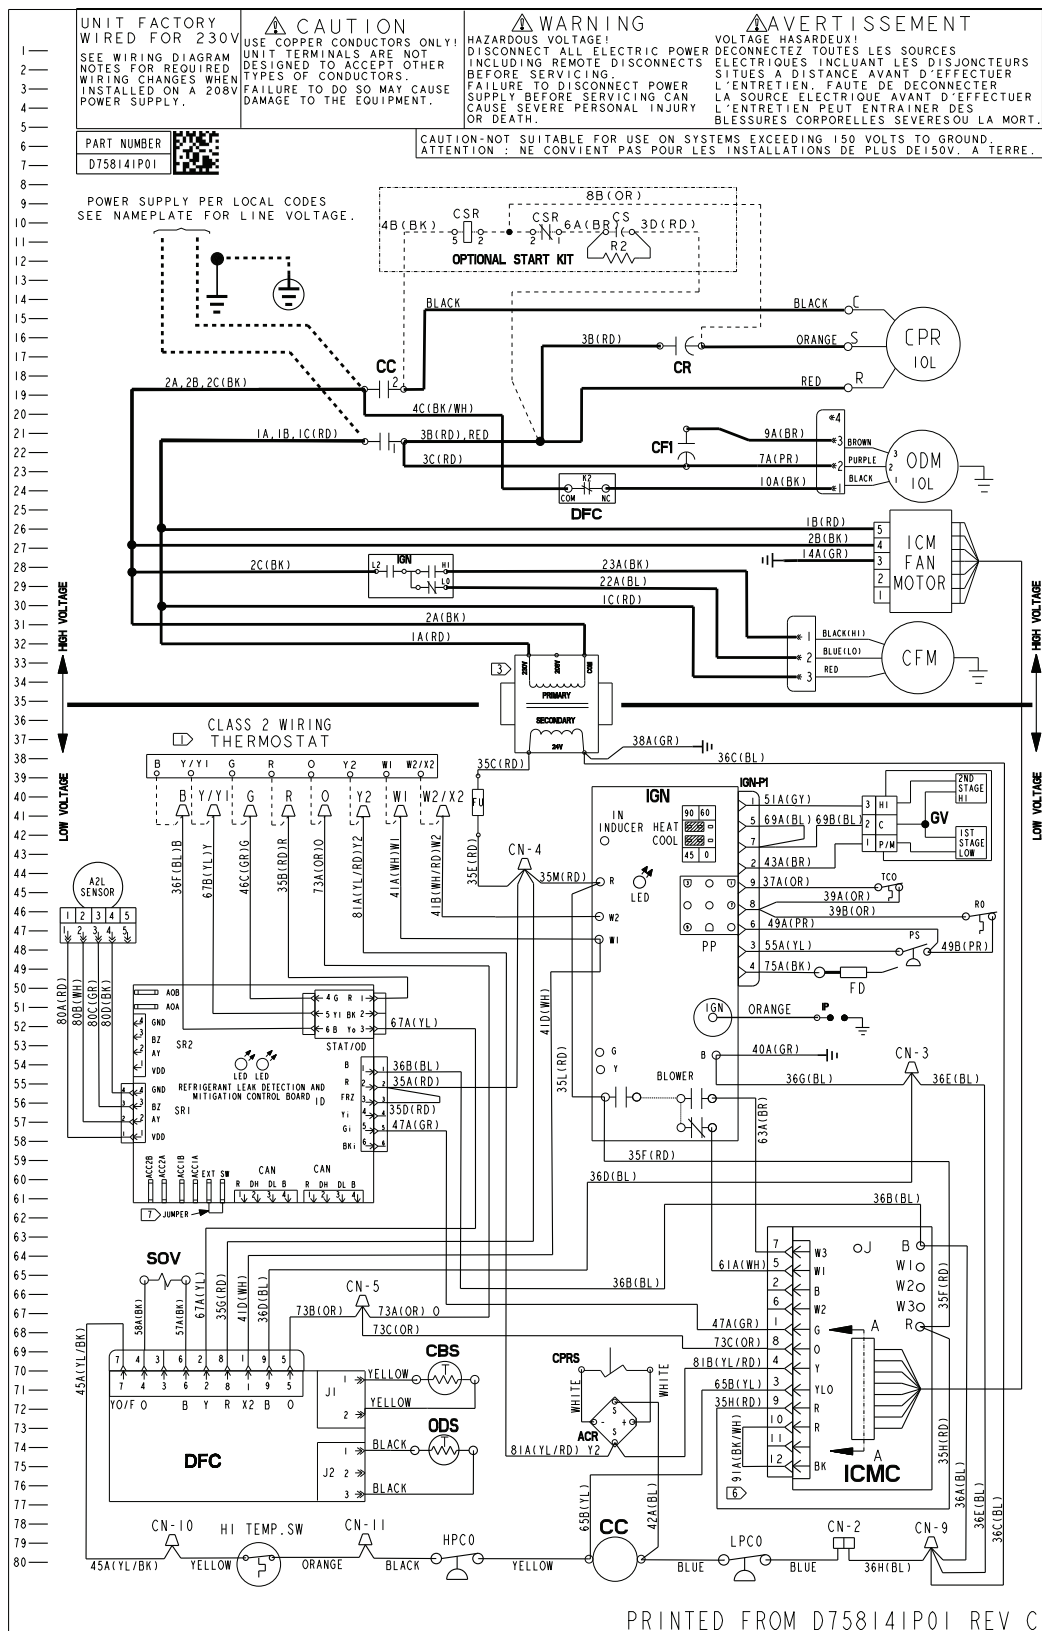


Figure 4. Model — 5DCZ5060A

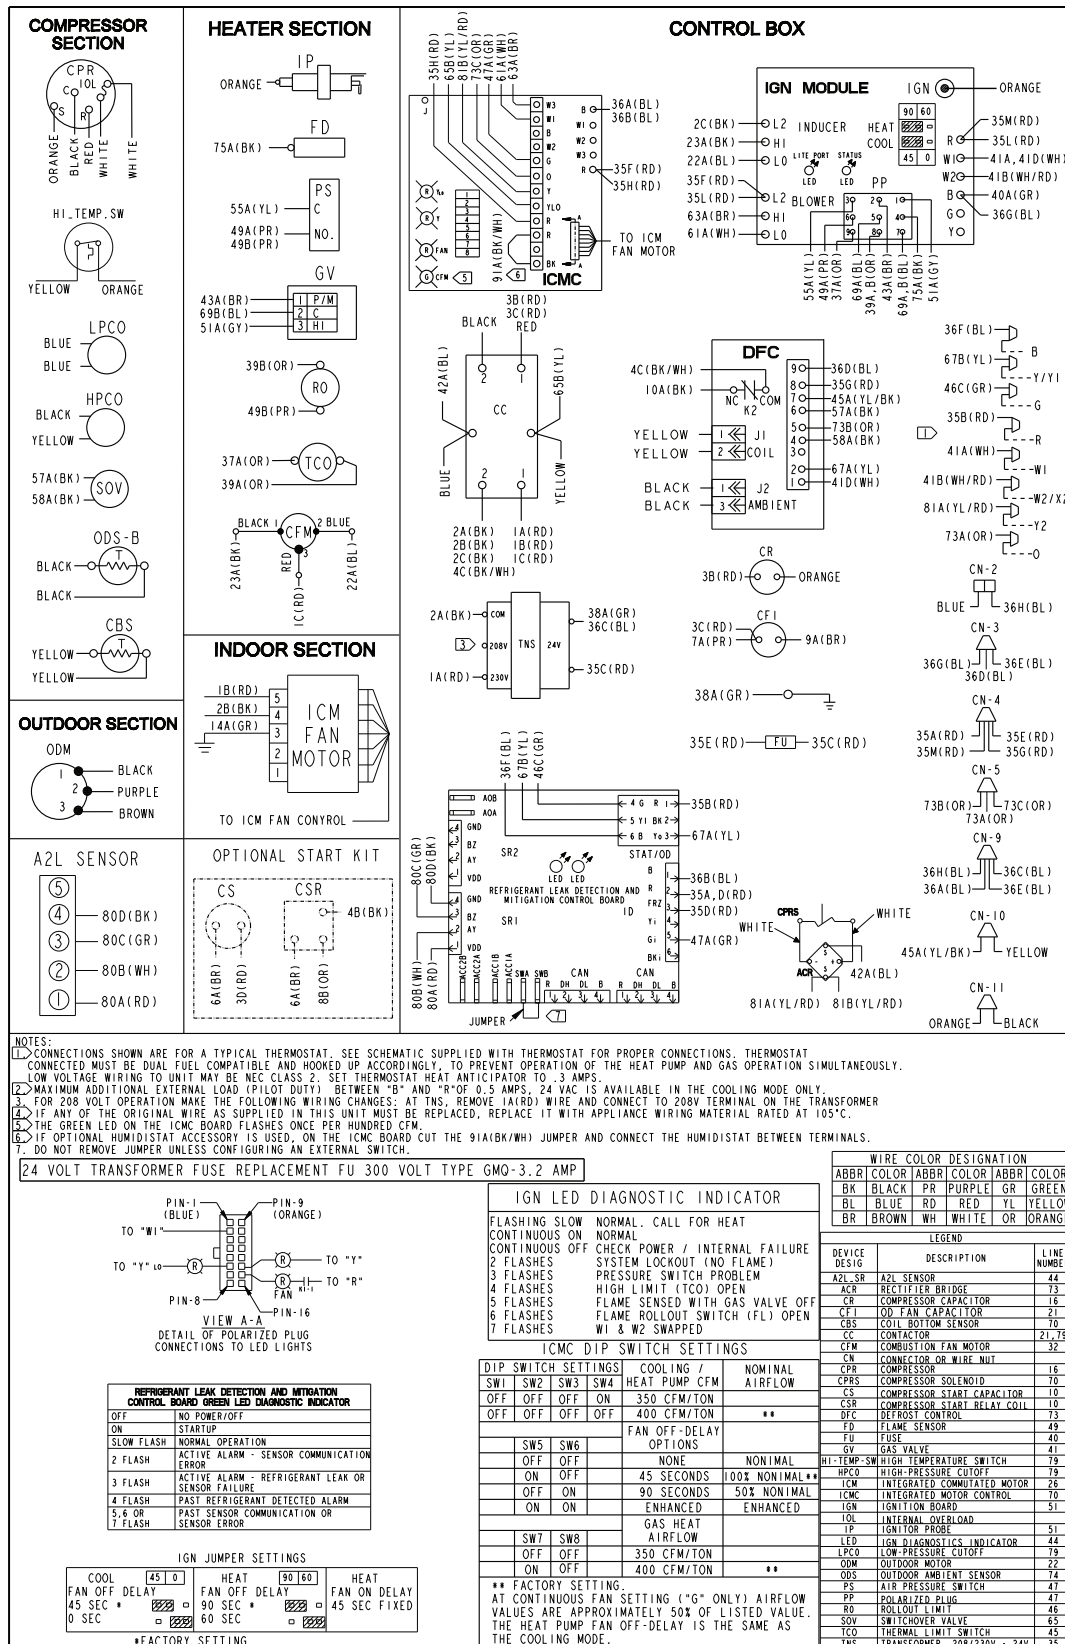

Full Perimeter Roof Mounting Curb

Figure 5. 2.0 to 3.0 ton models

BAYCURB050B Full Perimeter Roof Mounting Curb



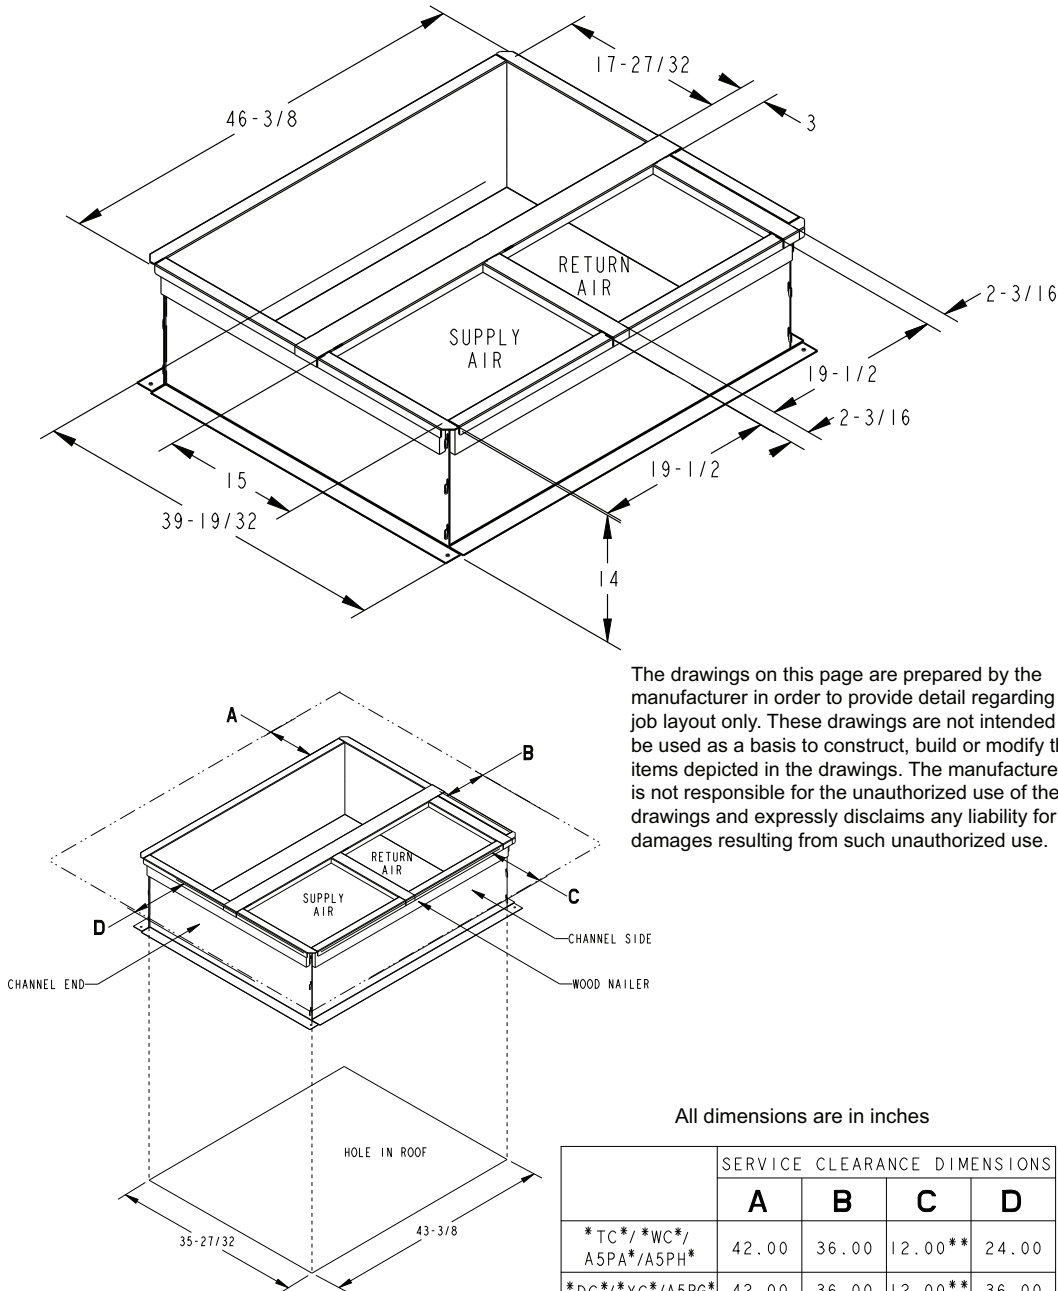


Figure 6. 3.5 to 5.0 ton models
BAYCURB051B Full Perimeter Roof Mounting Curb


The drawings on this page are prepared by the manufacturer in order to provide detail regarding job layout only. These drawings are not intended to be used as a basis to construct, build or modify the items depicted in the drawings. The manufacturer is not responsible for the unauthorized use of these drawings and expressly disclaims any liability for damages resulting from such unauthorized use.

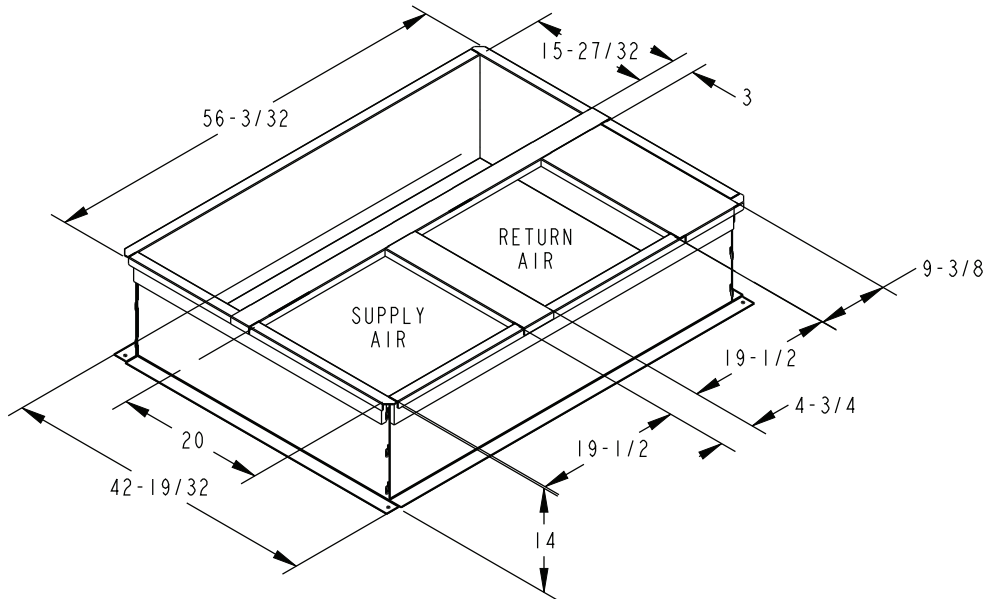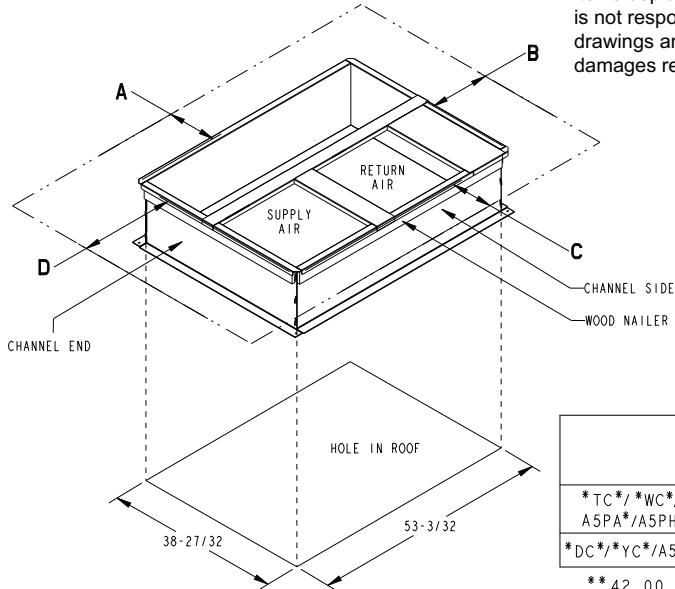

All dimensions are in inches

	SERVICE CLEARANCE DIMENSIONS			
	A	B	C	D
TC/*WC*/ A5PA*/A5PH*	42.00	36.00	12.00**	24.00
DC/*YC*/A5PG*	42.00	36.00	12.00**	36.00

**42.00 WITH ECONOMIZER WITH 25% FRESH AIR ACCESSORY



Optional Equipment — Filter Rack

Figure 7. BAYFLTR101 filter rack (2.0 to 3.0 ton models)/ BAYFLTR201 (3.5 to 5.0 ton models) (Mounts in filter/coil section)


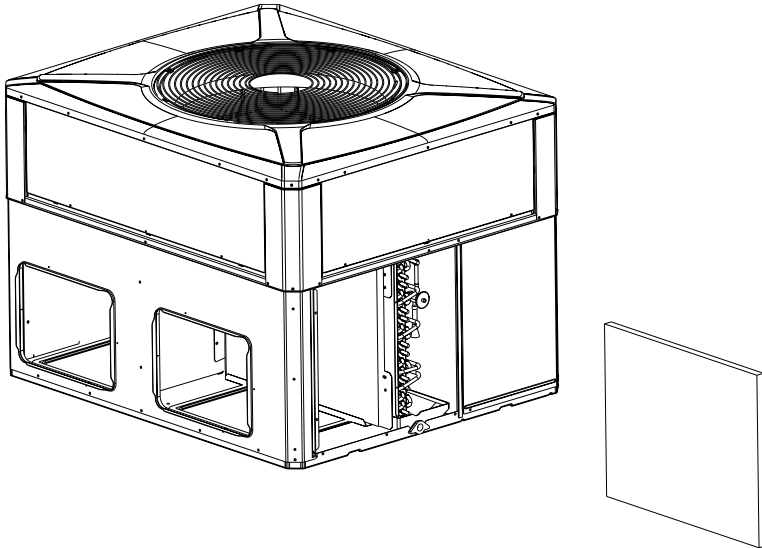


Figure 8. BAYACCDOR1A hinged filter access door (2.0 to 3.0 ton models)/ BAYACCDOR2A (3.5 to 5.0 ton models) (Replaces filter/coil access panel)

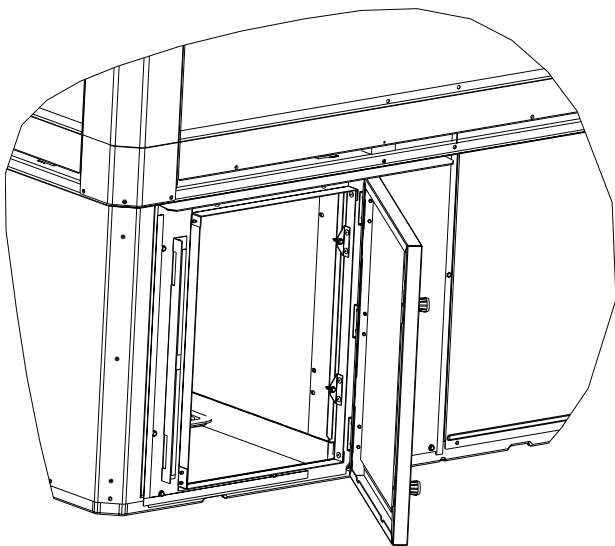

Note: The drawings on this page are prepared by the manufacturer in order to provide detail regarding job layout only. These drawings are not intended to be used as a basis to construct, build or modify the items depicted in the drawings. The manufacturer is not responsible for the unauthorized use of these drawings and expressly disclaims any liability for damages resulting from such unauthorized use.

Optional Equipment — Economizer

Figure 9. BAYECON107A and BAYECON108A down discharge economizer and rain hood (Mounts over horizontal return air opening)

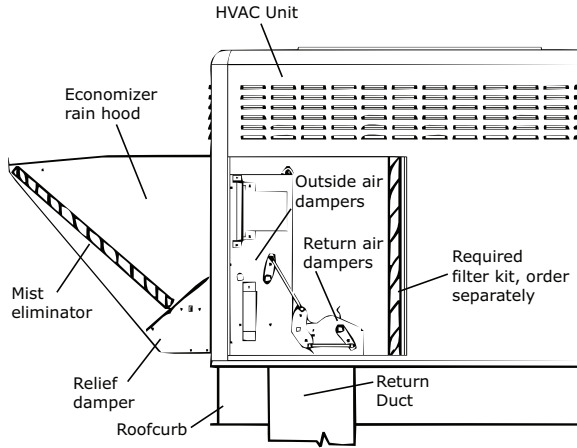


Table 11. Economizer application models

Economizer	Unit Application Models
BAYECON107A	2.0 to 3.0 Ton Models
BAYECON108A	3.5 to 5.0 Ton Models

Figure 10. BAYCON207A and BAYCON208A horizontal economizer and rain hood

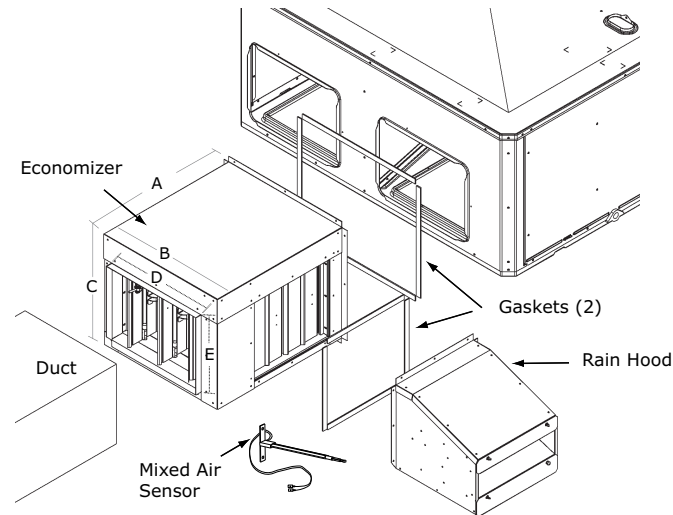


Table 12. Economizer dimensions (in inches)

Economizer	Models	A	B	C	D	E	F
BAYECON207A	2.0 to 3.0 Ton	22	20	16–7/8	15–11/16	11–11/16	15
BAYECON208A	3.5 to 5.0 Ton	26	22–21/32	19	17–11/16	14–11/16	21–3/8

Note: The drawings on this page are prepared by the manufacturer in order to provide detail regarding job layout only. These drawings are not intended to be used as a basis to construct, build or modify the items depicted in the drawings. The manufacturer is not responsible for the unauthorized use of these drawings and expressly disclaims any liability for damages resulting from such unauthorized use.

Optional Equipment — Outside Air Damper

Figure 11. BAYOSAH001A and BAYOSAH002A outside air damper (Replaces filter/coil access panel)

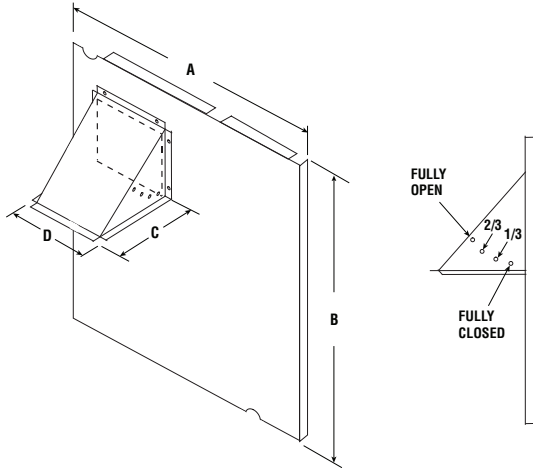


Table 13. Outside air damper dimensions (in inches)

Manual Fresh Air Model	Unit Application Models	A	B	C	D
BAYOSAH001A	2.0 to 3.0 Ton	22–7/16	20–11/16	12–3/8	9–3/16
BAYOSAH002A	3.5 to 5.0 Ton	25–3/16	20–11/16	12–3/8	9–3/16

Figure 12. BAYDMPR101A and BAYDMPR102A, 25% motorized outside air damper (Mounts over horizontal return air opening)

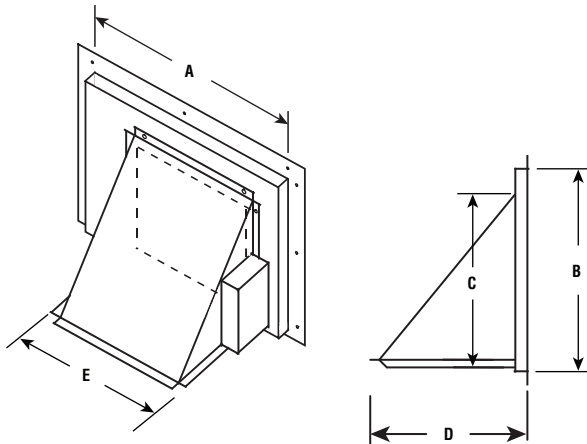



Table 14. Outside air damper dimensions (in inches)

Manual Fresh Air Model	Unit Application Models	A	B	C	D	E
BAYDMPR101A	2.0 to 3.0 Ton	15–13/16	11–13/16	10–1/4	11–1/2	12–1/4
BAYDMPR102A	3.5 to 5.0 Ton	18–3/16	15–1/8	10–1/4	11–1/2	12–1/4

Note: The drawings on this page are prepared by the manufacturer in order to provide detail regarding job layout only. These drawings are not intended to be used as a basis to construct, build or modify the items depicted in the drawings. The manufacturer is not responsible for the unauthorized use of these drawings and expressly disclaims any liability for damages resulting from such unauthorized use.

Dimensional Data

Figure 13. Space on sides requirements

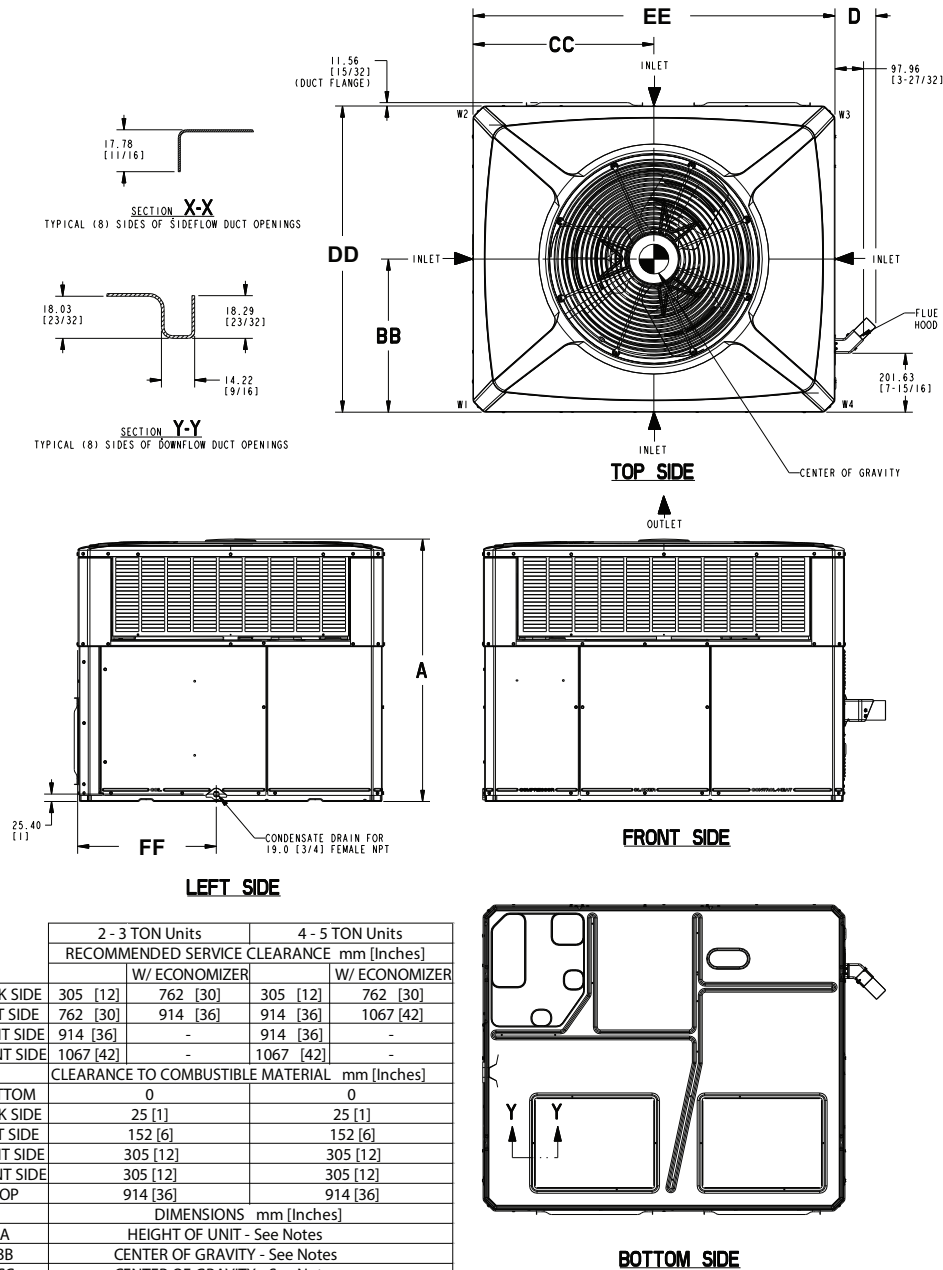


Note: The view labeled "Bottom side" represents the base as viewed looking up from underneath the unit.

Notes:

- The Bottom Side view represents looking up from under the unit.
- For dimension A unit height, see [Table 15, p. 20](#).
- For center of gravity dimensions BB and CC, see [Table 16, p. 21](#).

Figure 14. Bottom and back duct openings

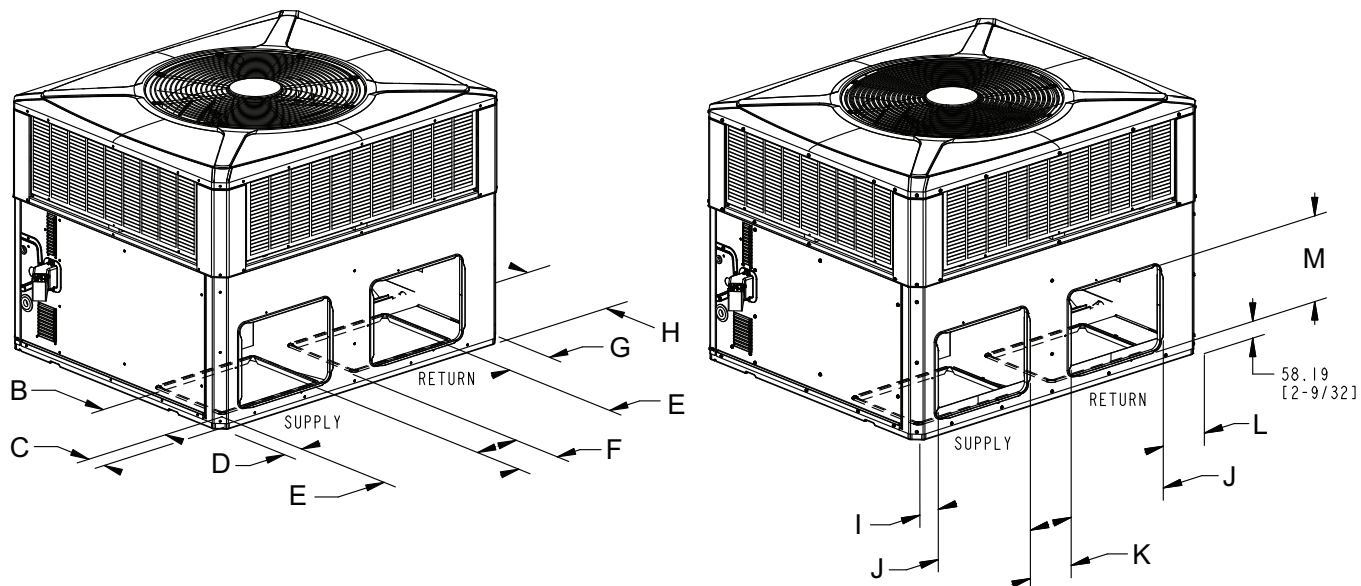

BOTTOM DUCT OPENINGS

BACK DUCT OPENINGS

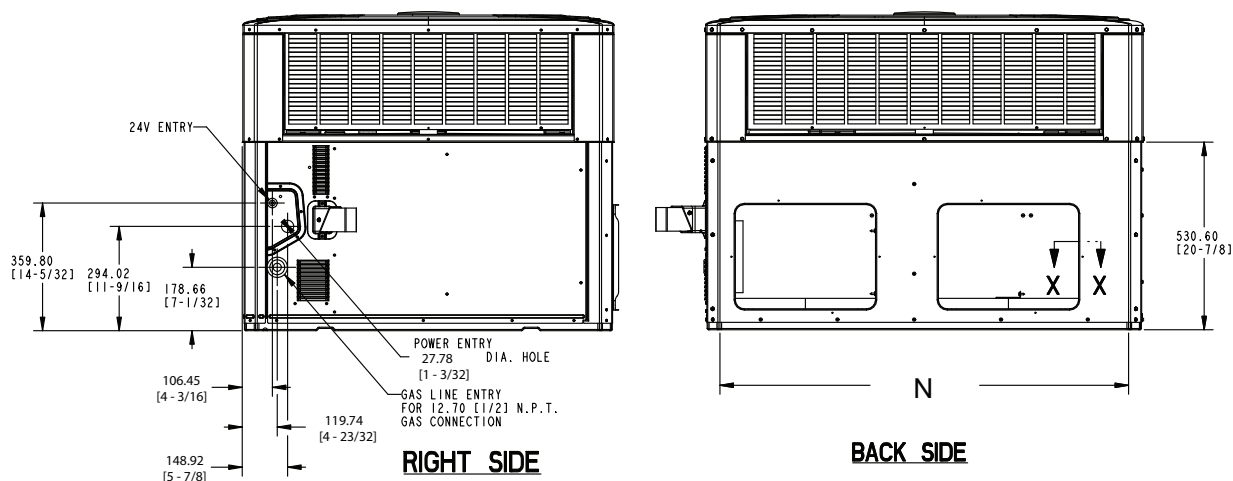


Table 15. Dimensions (mm [inch])

Model	Height A	B	C	D	E	F	G	H	I	J	K	L	M	N
5DCZ5024A	949.33 [37-3/8]	304.80 [12.0]	84.46 [3.32]	82.16 [3.23]	406.40 [16.0]	167.89 [6.61]	180.20 [7.1]	304.80 [12.0]	86.25 [3.40]	398.22 [15.68]	176.07 [6.93]	184.29 [7.26]	296.62 [11.68]	1108.75 [43.50]
5DCZ5030A														
5DCZ5036A														
5DCZ5042A	1050.93 [41-3/8]	457.20 [18.0]	85.60 [3.37]	84.12 [3.31]	381.00 [15.0]	244.09 [9.61]	327.45 [12.89]	381.00 [15.0]	88.21 [3.47]	449.02 [17.68]	176.07 [6.93]	331.54 [13.05]	372.82 [14.68]	1402.34 [55.21]
5DCZ5048A														
5DCZ5060A														

Table 16. Weights and center of gravity

Model	Corner Weights KG[LBS]				Shipping Weight KG [LBS]	Unit Weight KG[LBS]	Center of Gravity mm[inch]	
	W1	W2	W3	W4			BB	CC
5DCZ5024A	60.8 [134]	37.2 [82]	30.4 [67]	50.3 [111]	222.3 [490]	178.7 [394]	386.1 [15.2]	558.8 [22.0]
5DCZ5030A	62.6 [138]	37.2 [82]	30.4 [67]	50.3 [111]	222.3 [490]	180.5 [398]	386.1 [15.2]	558.8 [22.0]
5DCZ5036A	61.3 [140]	37.2 [82]	30.4 [67]	50.3 [111]	222.3 [490]	179.2 [395]	386.1 [15.2]	558.8 [22.0]
5DCZ5042A	71.8 [158]	46.3 [102]	42.2 [93]	50.3 [111]	291.9 [644]	233.8 [516]	419.1 [16.5]	706.1 [27.8]
5DCZ5048A	84.0 [185]	46.3 [102]	42.2 [93]	73.5 [162]	304.0 [670]	246.0 [542]	419.1 [16.5]	706.1 [27.8]
5DCZ5060A	84.0 [185]	47.2 [104]	43.1 [95]	73.5 [162]	308.1 [679]	250.0 [551]	419.1 [16.5]	711.2 [28.0]



Mechanical Specifications

General

All units shall be factory assembled, piped, internally wired and fully charged with refrigerant. All units shall be designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities shall be rated in accordance with A.H.R.I. standards. The unit design is certified to UL 60335 and ANSI Z21.47/CSA 2.3, specifically for outdoor applications using natural gas or propane. All units shall be designed for outdoor rooftop or ground level installation. Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint.

Shipped for horizontal application, convertible to downflow.

Casings -All panels shall be heavy gauge steel, gasketed and insulated. Foil-faced insulation shall be in the heat exchanger section. Foil-faced insulation shall be in the evaporator section. Base pan shall be heavy gauge steel. **WEATHERGUARD™** exterior corrosion resistant screws shall be used for added resistance to rust and corrosion.

Controls - Refrigeration cycle controls shall include condenser fan, evaporator fan and compressor contactors. Compressors shall be equipped with a combination internal winding thermostat/current overload. Internal high pressure relief shall also be provided.

Refrigeration System

Compressors - The Climatuff® compressor features internal over temperature and pressure protector, total dipped hermetic motor. Other features include: centrifugal oil pump, and low vibration and noise.

Evaporator Coil -Internally enhanced 3/8-inch OD seamless copper tubing mechanically bonded to aluminum fins, factory pressure tested at 480 psig and leak tested at 250 to 300 psig. All units have TXV to control refrigeration flow.

Condenser Coil - The **Spine Fin™** condenser coil shall be continuously wrapped, corrosion resistant all aluminum with minimum brazed joints. This coil is 3/8-inch OD seamless aluminum tubing glued to a continuous aluminum fin. Coils are lab tested to withstand 2,000 pounds of pressure per square inch. The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Indoor Air Fan - Direct-drive, forward-curved, centrifugal wheel in a Composite **Vortica®** Blower housing. Motor shall have thermal overload protection. Permanently lubricated motor bearings. Motor/blower assembly isolated from unit with rubber mounts.

Condenser Fan -Direct-drive, draw through propeller type. Weather-proofed permanent split capacitor fan motor shall have built-in thermal overload and permanently lubricated motor bearings.

Low Ambient - Standard refrigerant system operation down to 55°F. Low ambient accessory required for operation to 0°F ambient condition.

Gas-Fired Heating System - Models shall provide completely assembled, wired and piped gas fired heating systems within unit. Design certified by UL, specifically for outdoor application. Threaded gas connection on the unit.

Electronic Ignition System - Main burner is lit each time thermostat calls for gas heat. Flame sensor proves flame and keeps the main burners on. Should a loss of flame occur, the main valve closes and the spark recurs within 0.8 second. When thermostat is satisfied, main burner is extinguished.

Forced Combustion Blower - Insures flame stability under varying wind conditions. Gives higher combustion efficiency and location flexibility.

Heat Exchanger - stainless steel tubes. Free floating design.

Burners - Stainless steel. Multi-port inshot.

Accessories (U.S. Domestic Models)

Roof Curb - The roof curb shall be designed to mate with the unit and provide support and complete weather-tight installation when properly installed. Curb shall ship knocked down for field assembly, and include wood nailer strips.

Modulating Economizer - This accessory shall be field installed and be composed of the following items: 0-100% fresh air damper, damper drive motor fixed dry bulb enthalpy control, and low voltage polarized plug for electrical connections. Solid state enthalpy or differential enthalpy control is optional.

Economizer operations shall be controlled by the preset position of the enthalpy control. A barometric relief damper shall be standard with the economizer and provide a pressure operated damper that shall be gravity closing and prohibit entrance of outside air on equipment "off" cycle.

Manual Fresh Air Hood - Manual outside air provides a fixed outside air quantity from 0 to 25 percent. Includes hood and birdscreen.

Low Ambient Control - Control allows cycling of compressor under low ambient cooling conditions. Required for cooling operation to 0°F.

Propane Gas

Conversion Kit - For conversion from natural gas to LP gas.



Trane - by Trane Technologies (NYSE: TT), a global innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit trane.com or tranetechnologies.com.



The AHRI Certified mark indicates Trane U.S. Inc. participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

Trane has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.