



TRANE®

22-1965-1A-EN

Product Data

**Split System (R-410A)
Air Handler for
Multi Split Inverter System
9,000 to 24,000 BTU/Hr**



Ceiling Concealed Type Indoor Unit:

4MXD2309A10N0

4MXD2312A10N0

4MXD2318A10N0

4MXD2321A10N0

4MXD2324A10N0

It's Hard to Stop a Trane.

Split System (R-410A, 60Hz) 16 SEER, Inverter System - 9,000 to 24,000 BTU/Hr

Whatever their specific heating and cooling needs, people trust Trane to provide reliable efficient solutions. Trane Ductless Systems allow you to create a comfortable indoor environment in spaces where adding ductwork might be impractical or too expensive, or not as efficient as a ductless option.

Retrofit a house that doesn't have a ducted system or where the central system is already at capacity. Bring efficient, economical comfort to new room additions. Provide spot heating and cooling that operates independently of the central system. Utilize ductless efficiency for new construction projects where ductless systems make more sense than a traditional ducted system.

Easy to install Trane Ductless Systems offer flexibility in design and provide efficiency and economy with two simple components - an outdoor unit and one or more stylish, low profile, indoor units. All built with Trane's legendary reliability and innovative thinking.

Introducing the new TRANE Split System Family



**4MXD High Efficiency
Ceiling Concealed Type
Indoor Unit**

Quiet Operation

Specially designed air flow structure efficiently reduces operation noise to provide quiet comfort, as low as 29 dB.

Built-in Drain Pump

Easily drain condensation from the unit with the built-in drain pump.

Compact Design

The compact construction and simple structure make the concealed model easy to install and maintain.


Fresh Air Supply

Designed to exchange fresh air from outside to indoors improving the air quality of the room.

Contents

Model Nomenclature	3
General Data	4-5
Unit Dimensions	6
Mechanical Specifications	7

INDOOR UNIT MODEL NOMENCLATURE

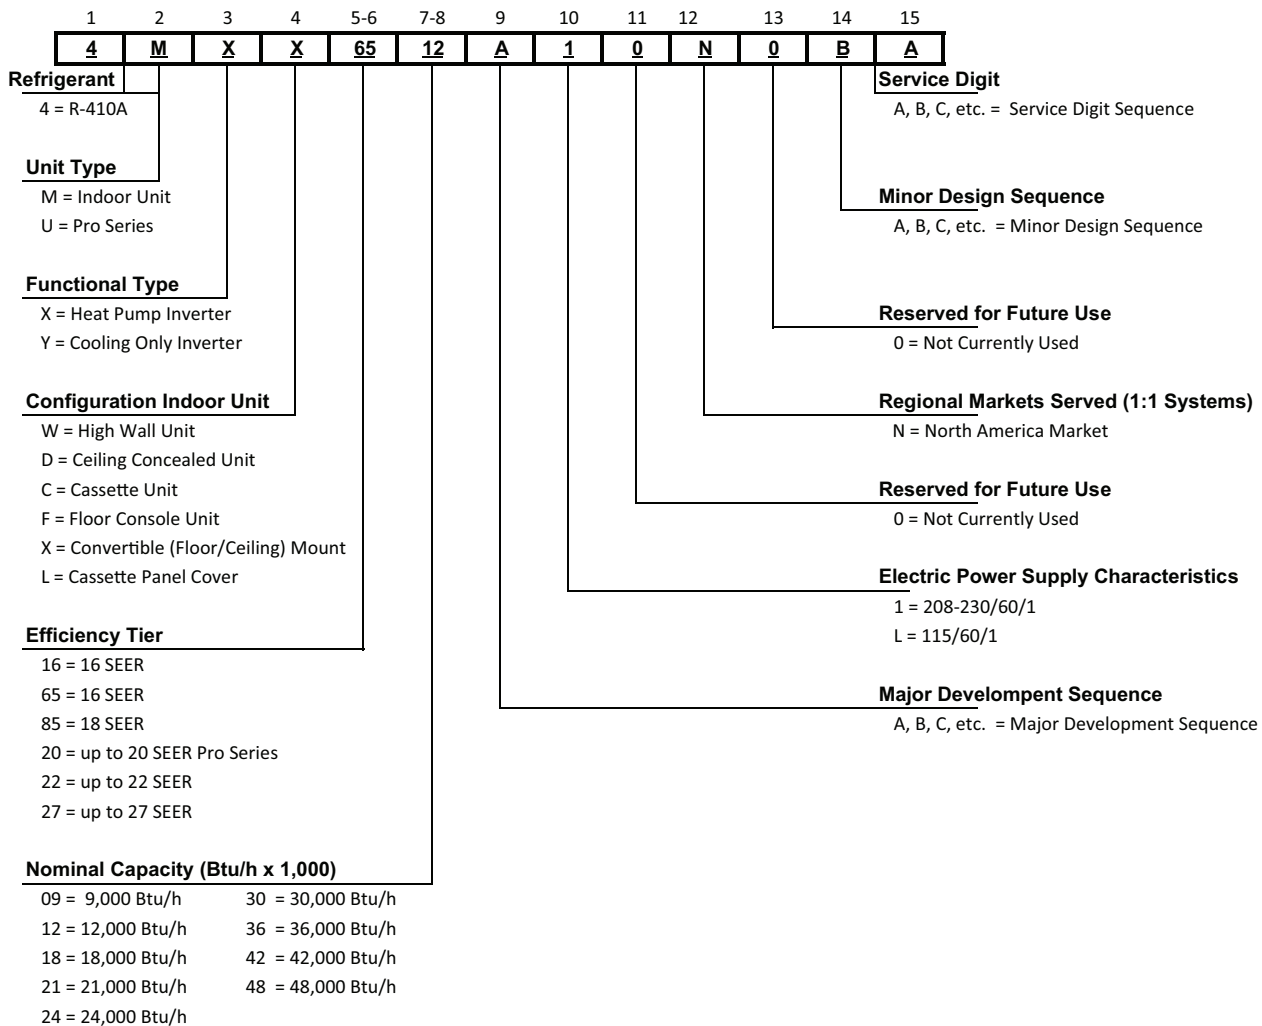

General Data

MODEL - Duct Type	4MXD2309A10N0	4MXD2312A10N0	4MXD2318A10N0
RATED Volts/PH	208 / 230 / 1	208 / 230 / 1	208 / 230 / 1
Frequency (Hz)	60	60	60
Total Cooling Capacity (Btu/h)	9000	12000	18000
Total Heating Capacity (Btu/h)	9500	13000	19000
Air Flow Volume (CFM) (H/M/L/SL)	324 / 253 / 212 / 188	353 / 288 / 247 / 212	589 / 412 / 312 / 288
Max. Static Pressure (In.H2O)	0.60	0.60	0.80
Sound Power Level dB(A) (H/M/L/SL)	46 / 40 / 37 / 35	48 / 43 / 39 / 36	49 / 43 / 39 / 36
Sound PRESSURE Level dB(A) (H/M/L/SL) ①	36 / 30 / 27 / 25	38 / 33 / 29 / 26	39 / 33 / 29 / 26
Dehumidifying Volume (Pint/h)	1.69	2.96	3.80
PCB Fuse Current (A)	5	5	5
Fan Quantity	1	1	2
Fan Type	Centrifugal	Centrifugal	Centrifugal
Motor Full Load Amp (FLA)	-	-	-
Fan Motor Drive Type	Direct Drive	Direct Drive	Direct Drive
Fan Motor Speed (RPM) (H/M/L/SL)	860 / 670 / 570 / 510	940 / 770 / 670 / 570	990 / 700 / 530 / 490
Evaporator Face Area (ft ²)	1.50	1.50	2.47
Evaporator Number of Rows	2	2	3
Evaporator Fin Type	Fenestrate plain and Hydrophilic film	Fenestrate plain and Hydrophilic film	Fenestrate plain and Hydrophilic film
Evaporator Fin Coating	Blue	Blue	Blue
Air Filter Size (L x W/No.) (inch)	26.06 x 9.96 / 1	26.06 x 9.96 / 1	26.06 x 9.96 / 2
Gas Pipe (to indoor unit) (inch)	3/8	1/2	5/8
Liquid Pipe (inch)	1/4	1/4	3/8
Connection Method	Flare Connection	Flare Connection	Flare Connection
Drain Connection (Outer diameter)(inch)	1.0	1.0	1.0
Dimension (Uncrated) (W x D x H) (inch)	32.67 x 29.68 x 11.81	32.67 x 29.68 x 11.81	44.49 x 29.68 x 11.81
Dimension (Crated) (L x W x H) (inch)	35.31 x 31.81 x 14.17	35.31 x 31.81 x 14.17	47.44 x 32.00 x 14.17
Net Weight (lbs)	70.54	70.54	92.59
Gross Weight (lbs)	83.77	83.77	106.92


① Sound PRESSURE Level @ 3.3 ft. dB(A)

General Data

MODEL - Duct Type	4MXD2321A10N0	4MXD2324A10N0
RATED Volts/PH	208 / 230 / 1	208 / 230 / 1
Frequency (Hz)	60	60
Total Cooling Capacity (Btu/h)	21000	24000
Total Heating Capacity (Btu/h)	23000	27000
Air Flow Volume (CFM) (H/M/L/SL)	589 / 412 / 312 / 288	736 / 559 / 453 / 406
Max. Static Pressure (In.H2O) (inch)	0.80	0.80
Sound Power Level dB(A) (H/M/L/SL)	49 / 43 / 39 / 36	52 / 46 / 42 / 38
Sound PRESSURE Level dB(A) (H/M/L/SL) ①	39 / 33 / 29 / 26	42 / 36 / 32 / 28
Dehumidifying Volume (Pint/h)	4.23	5.28
PCB Fuse Current (A)	5	5
Fan Quantity	2	2
Fan Type	Centrifugal	Centrifugal
Motor Full Load Amp (FLA)	-	-
Fan Motor Drive Type	Direct Drive	Direct Drive
Fan Motor Speed (RPM) (H/M/L/SL)	990 / 700 / 530 / 490	1050 / 800 / 650 / 580
Evaporator Face Area (ft ²)	2.47	2.47
Evaporator Number of Rows	3	3
Evaporator Fin Type	Fenestrate plain and Hydrophilic film	Fenestrate plain and Hydrophilic film
Evaporator Fin Coating	Blue	Blue
Air Filter Size (L x W/No.) (inch)	26.06 x 9.96 / 2	26.06 x 9.96 / 2
Gas Pipe (to indoor unit) (inch)	5/8	5/8
Liquid Pipe (inch)	3/8	3/8
Connection Method	Flare Connection	Flare Connection
Drain Connection (Outer diameter)(inch)	1.0	1.0
Dimension (Uncrated) (W x D x H) (inch)	44.49 x 29.68 x 11.81	44.49 x 29.68 x 11.81
Dimension (Crated) (L x W x H) (inch)	47.44 x 32.00 x 14.17	47.44 x 32.00 x 14.17
Net Weight (lbs)	92.59	92.59
Gross Weight (lbs)	106.92	106.92

① Sound PRESSURE Level @ 3.3 ft. dB(A)


Unit Dimensions

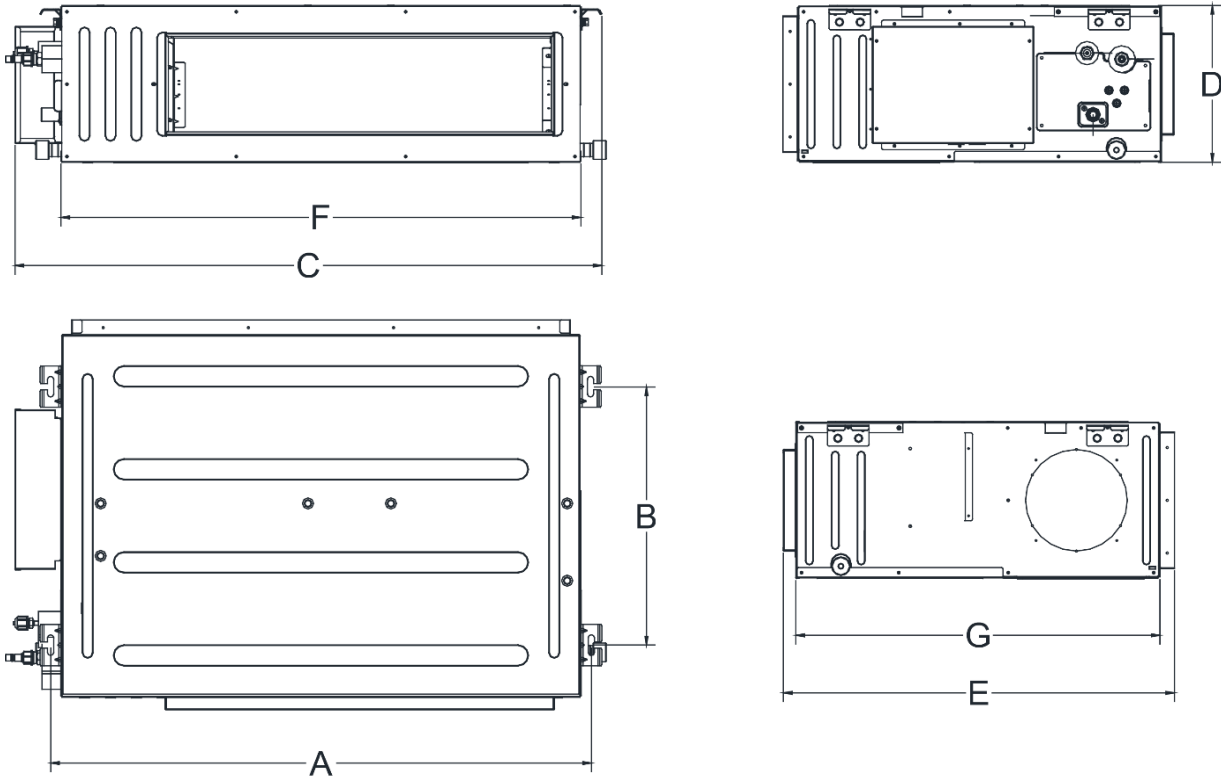

Unit Dimensions - mm (inch)							
MODEL	A	B	C	D	E	F	G
4MXD2309A	740	500	830	300	754	700	700
4MXD2312A	(29-1/8)	(19-11/16)	(32-11/16)	(11-13/16)	(29-11/16)	(27-9/16)	(27-9/16)
4MXD2318A	1040	500	1130	300	754	1000	700
4MXD2321A	(40-15/16)	(19-11/16)	(44-1/2)	(11-13/16)	(29-11/16)	(39-3/8)	(27-9/16)
4MXD2324A							

NOTES: Be sure to place a inspection opening at the position indicated in the following diagram for maintenance of the equipment.

Unit: mm(in.)

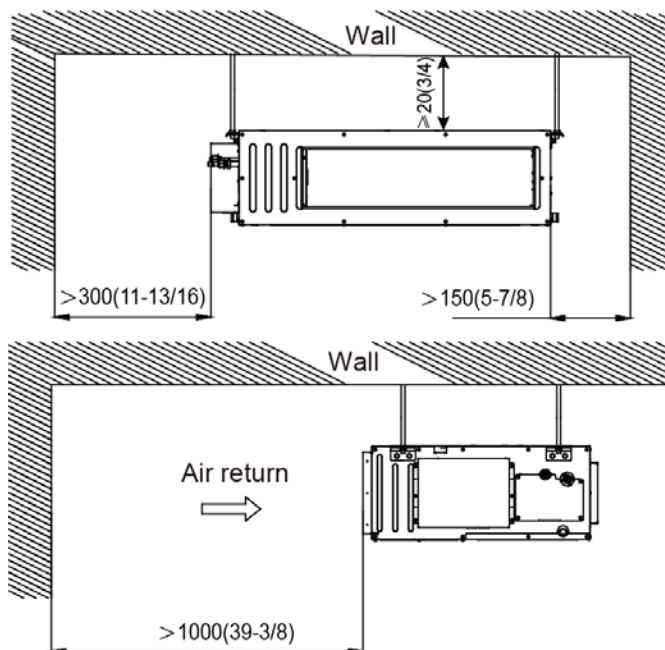

Mechanical Specifications

Ceiling Concealed Type Indoor Unit

General

The ceiling concealed type air handler shall be completely factory assembled including coil, condensate drain pan, built-in condensate drain pump, fan motor and electric controls to be used with a wired remote controller. Unit shall be matched with a Trane outdoor unit, rated and tested in accordance with AHRI standard. Unit shall be ETL listed.

Unit Casing

Casing shall be provided with drain hose to facilitate piping and electrical connection on the right and left of the unit. An electrical service cover shall be provided to permit easy access to the electrical terminal strip.

Discharge Airflow and Distribution System

The unit is shipped configured for connection to rectangular grilles or registers. Alternate styles may be used with a field supplied transition.

Supply and return connections should be no longer than 3.3 feet total. This system is designed for customers that want a concealed system. It is not intended for air handler use to multiple rooms.

The system may be configured for either backward return air (default set-up) or by changing the flange and return cover plate the unit can be configured for downward return air.

Controls

Units shall have the capability to be controlled with the supplied wired control unit. The optional wireless remote may be used to operate the wall mounted control.

Remote Controller

The unit may have an optional wireless infrared remote controller with easy reading digital display panel to start, stop and regulate the supplied wired control from a distance.

The wireless controller is available for all units. **(Sold separately)**



Trane - by Trane Technologies (NYSE: TT), a global climate innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit trane.com or tranetechnologies.com.



The AHRI Certified mark indicates Trane U.S. Inc. participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

Trane has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.