RELEASED 04/Jan/2018 15:31:37 GMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCE:
.X =±
.XX =±
.XXX =±
ANGLES =± ° HOLE DIA = ± ±
FINISH ✓
CONFORMS TO ASME Y14.5M-1994.

TRANE

THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF TRANE

DRAWN BY: N.CHALITA ©TRANE DATE: 06/22/2017

DO NOT SCALE PRINT

THIRD ANGLE PROJECTION

12132667 SHEET 1 OF 1 REV B

PRECEDENT
DIAGRAM
SZVAV W/DCV
D/E CABINET

NOTES:

1. REDUCE TRIMMED LABEL TO SIZE INDICATED WITH .125 BORDER.

8.00

4.50

OPTIONAL SINGLE ZONE VAV WITH DEMAND CONTROL VENTILATION

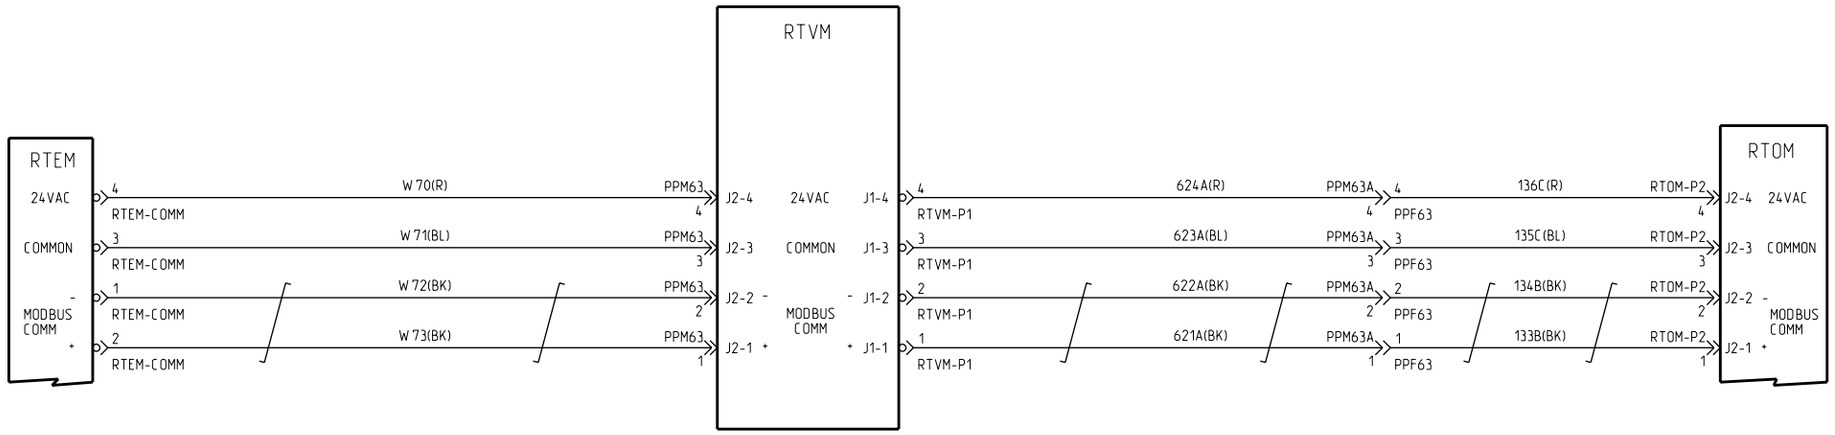

NOTES:

1. UNLESS OTHERWISE NOTED. ALL SWITCHES ARE SHOWN AT 25°C (77°F). AT ATMOSPHERIC PRESSURE. AT 50% RELATIVE HUMIDITY WITH ALL UTILITIES TURNED OFF AND AFTER A NORMAL SHUTDOWN HAS OCCURRED.
2. DASHED LINES INDICATE RECOMMENDED FIELD WIRING BY OTHERS. DASHED LINE ENCLOSURES AND/OR DASHED DEVICE OUTLINES INDICATE COMPONENTS PROVIDED BY THE FIELD. PHANTOM LINE ENCLOSURES INDICATE ALTERNATE CIRCUITRY OR AVAILABLE SALES OPTIONS.
3. NUMBERS ALONG THE RIGHT SIDE OF THE SCHEMATIC DESIGNATE THE LOCATION OF CONTACTS BY LINE NUMBER. AN UNDERLINED NUMBER INDICATES A NORMALLY CLOSED CONTACT.

REF	DESCRIPTION
RTEM	ECONOMIZER MODULE
RTOM	OPTIONS MODULE
RTVM	VENTILATION MODULE

121326670001B