

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCE:

.X ±.01
.XX ±.02
.XXX ±.03

ANGLES ±.015°
HOLE DIA ±.005
CONFORMS TO ASME Y14.5M-1994.

TRANE


THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF TRANE
DRAWN BY: N.EHALITA
DATE: 07/21/2017
THIRD ANGLE PROJECTION
DO NOT SCALE PRINT

12132668

PRECEDENT
DIAGRAM
MULTI-ZONE VAV
D/E CABINET

SHEET 1 OF 1
REV A

NOTES:
1. REDUCE TRIMMED LABEL TO SIZE INDICATED WITH .125 BORDER.

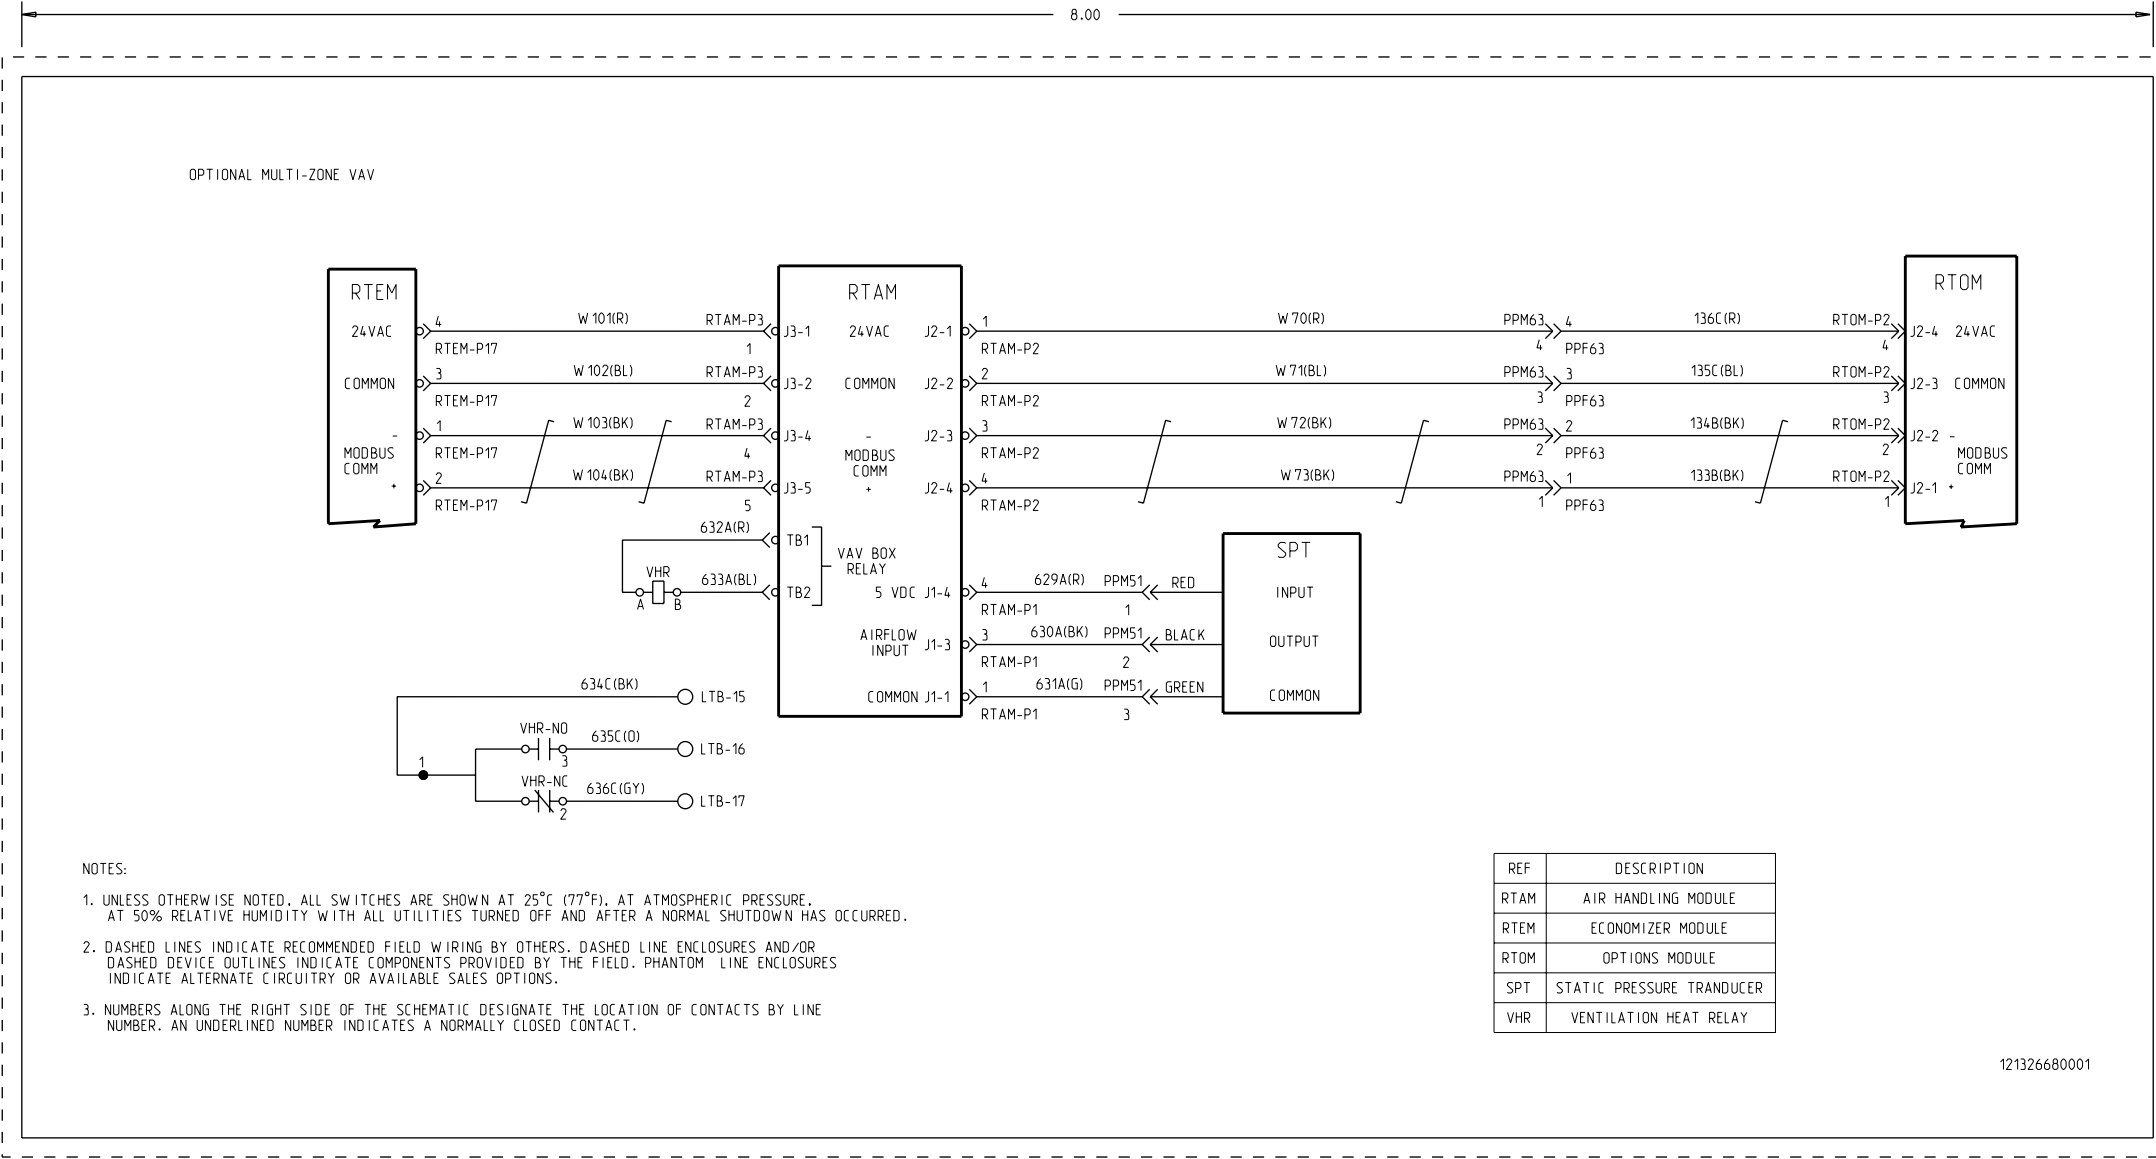

NOTES:
1. UNLESS OTHERWISE NOTED, ALL SWITCHES ARE SHOWN AT 25°C (77°F), AT ATMOSPHERIC PRESSURE, AT 50% RELATIVE HUMIDITY WITH ALL UTILITIES TURNED OFF AND AFTER A NORMAL SHUTDOWN HAS OCCURRED.
2. DASHED LINES INDICATE RECOMMENDED FIELD WIRING BY OTHERS. DASHED LINE ENCLOSURES AND/OR DASHED DEVICE OUTLINES INDICATE COMPONENTS PROVIDED BY THE FIELD. PHANTOM LINE ENCLOSURES INDICATE ALTERNATE CIRCUITRY OR AVAILABLE SALES OPTIONS.
3. NUMBERS ALONG THE RIGHT SIDE OF THE SCHEMATIC DESIGNATE THE LOCATION OF CONTACTS BY LINE NUMBER. AN UNDERLINED NUMBER INDICATES A NORMALLY CLOSED CONTACT.

REF	DESCRIPTION
RTAM	AIR HANDLING MODULE
RTEM	ECONOMIZER MODULE
RTOM	OPTIONS MODULE
SPT	STATIC PRESSURE TRANSDUCER
VHR	VENTILATION HEAT RELAY

121326680001