

WARNING HAZARDOUS VOLTAGE! DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS AND FOLLOW LOCK OUT AND TAG PROCEDURES BEFORE SERVICING. INSURE THAT ALL MOTOR CAPACITORS ARE DISCHARGED STORED VOLTAGE. UNITS WITH VARIABLE SPEED DRIVE, REFER TO DRIVE INSTRUCTIONS FOR CAPACITOR DISCHARGE. FAILURE TO DO THE ABOVE BEFORE SERVICING COULD RESULT IN DEATH OR SERIOUS INJURY.


AVERTISSEMENT TENSION DANGEREUSE! COUPER TOUTES LES TENSIONS ET OUVRIRE LES SECTIONNEURS A DISTANCE, PUIS SUIVRE LES PROCEDURES DE VERROUILLAGE ET DES ETIQUETTES AVANT TOUTE INTERVENTION. VERIFIER QUE TOUTS LES CONDENSATEURS DES MOTEURS SONT DECHARGES. DANS LE CAS D'UNITE A VITESSE VARIABLE, SE REPORTER AUX INSTRUCTIONS DE L'ENTRAINEMENT POUR DECHARGER LES CONDENSATEURS. NE PAS RESPECTER CES MESURES DE PRECAUTION PEUT ENTRAINER DES BLESSURES GRAVES POUVANT ETRE MORTELLES.

ADVERTENCIA ¡VOLTAJE PELIGROSO! DESCONECTE TODA LA ENERGIA ELECTRICA, INCLUIDO LAS DESCONEXIONES REMOTAS Y SIGA LOS PROCEDIMIENTOS DE CIERRE Y VERRUILLADO ANTES DE PROCEDER AL SERVICIO. ASEGURESE DE QUE TODOS LOS CAPACITORES DEL MOTOR HAYAN DESCARGADO EL VOLTAJE ALMACENADO. PARA LAS UNIDADES CON EJE DE DIRECCION DE VELOCIDAD VARIABLE, CONSULTE LAS INSTRUCCIONES PARA LA DESCARGA DEL CONDENSADOR. EL NO REALIZAR LO ANTERIORMENTE INDICADO, PODRIA OCASIONAR LA MUERTE O SERIAS LESIONES PERSONALES.

NOTICE USE COPPER CONDUCTORS ONLY! UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS. FAILURE TO DO THE ABOVE COULD RESULT IN EQUIPMENT DAMAGE.

AVIS N'UTILISER QUE DES CONDUCTEURS EN CUIVRE! LES BORNES DE LA UNITE NE SONT PAS CONÇUES POUR RECEVOIR D'AUTRES TYPES DE CONDUCTEURS. FAIRE DÉFAUT À LA PROCÉDURE CI-DESSUS PEUT ENTRAINER DES DOMMAGES À L'ÉQUIPEMENT.

AVISO ¡UTILICE ÚNICAMENTE CONDUCTORES DE COBRE! LAS TERMINALES DE LA UNIDAD NO ESTÁN DISEÑADAS PARA ACEPTAR OTROS TIPOS DE CONDUCTORES. NO SEGUIR LAS INSTRUCCIONES ANTERIORES PUEDE PROVOCAR DAÑOS EN EL EQUIPO.

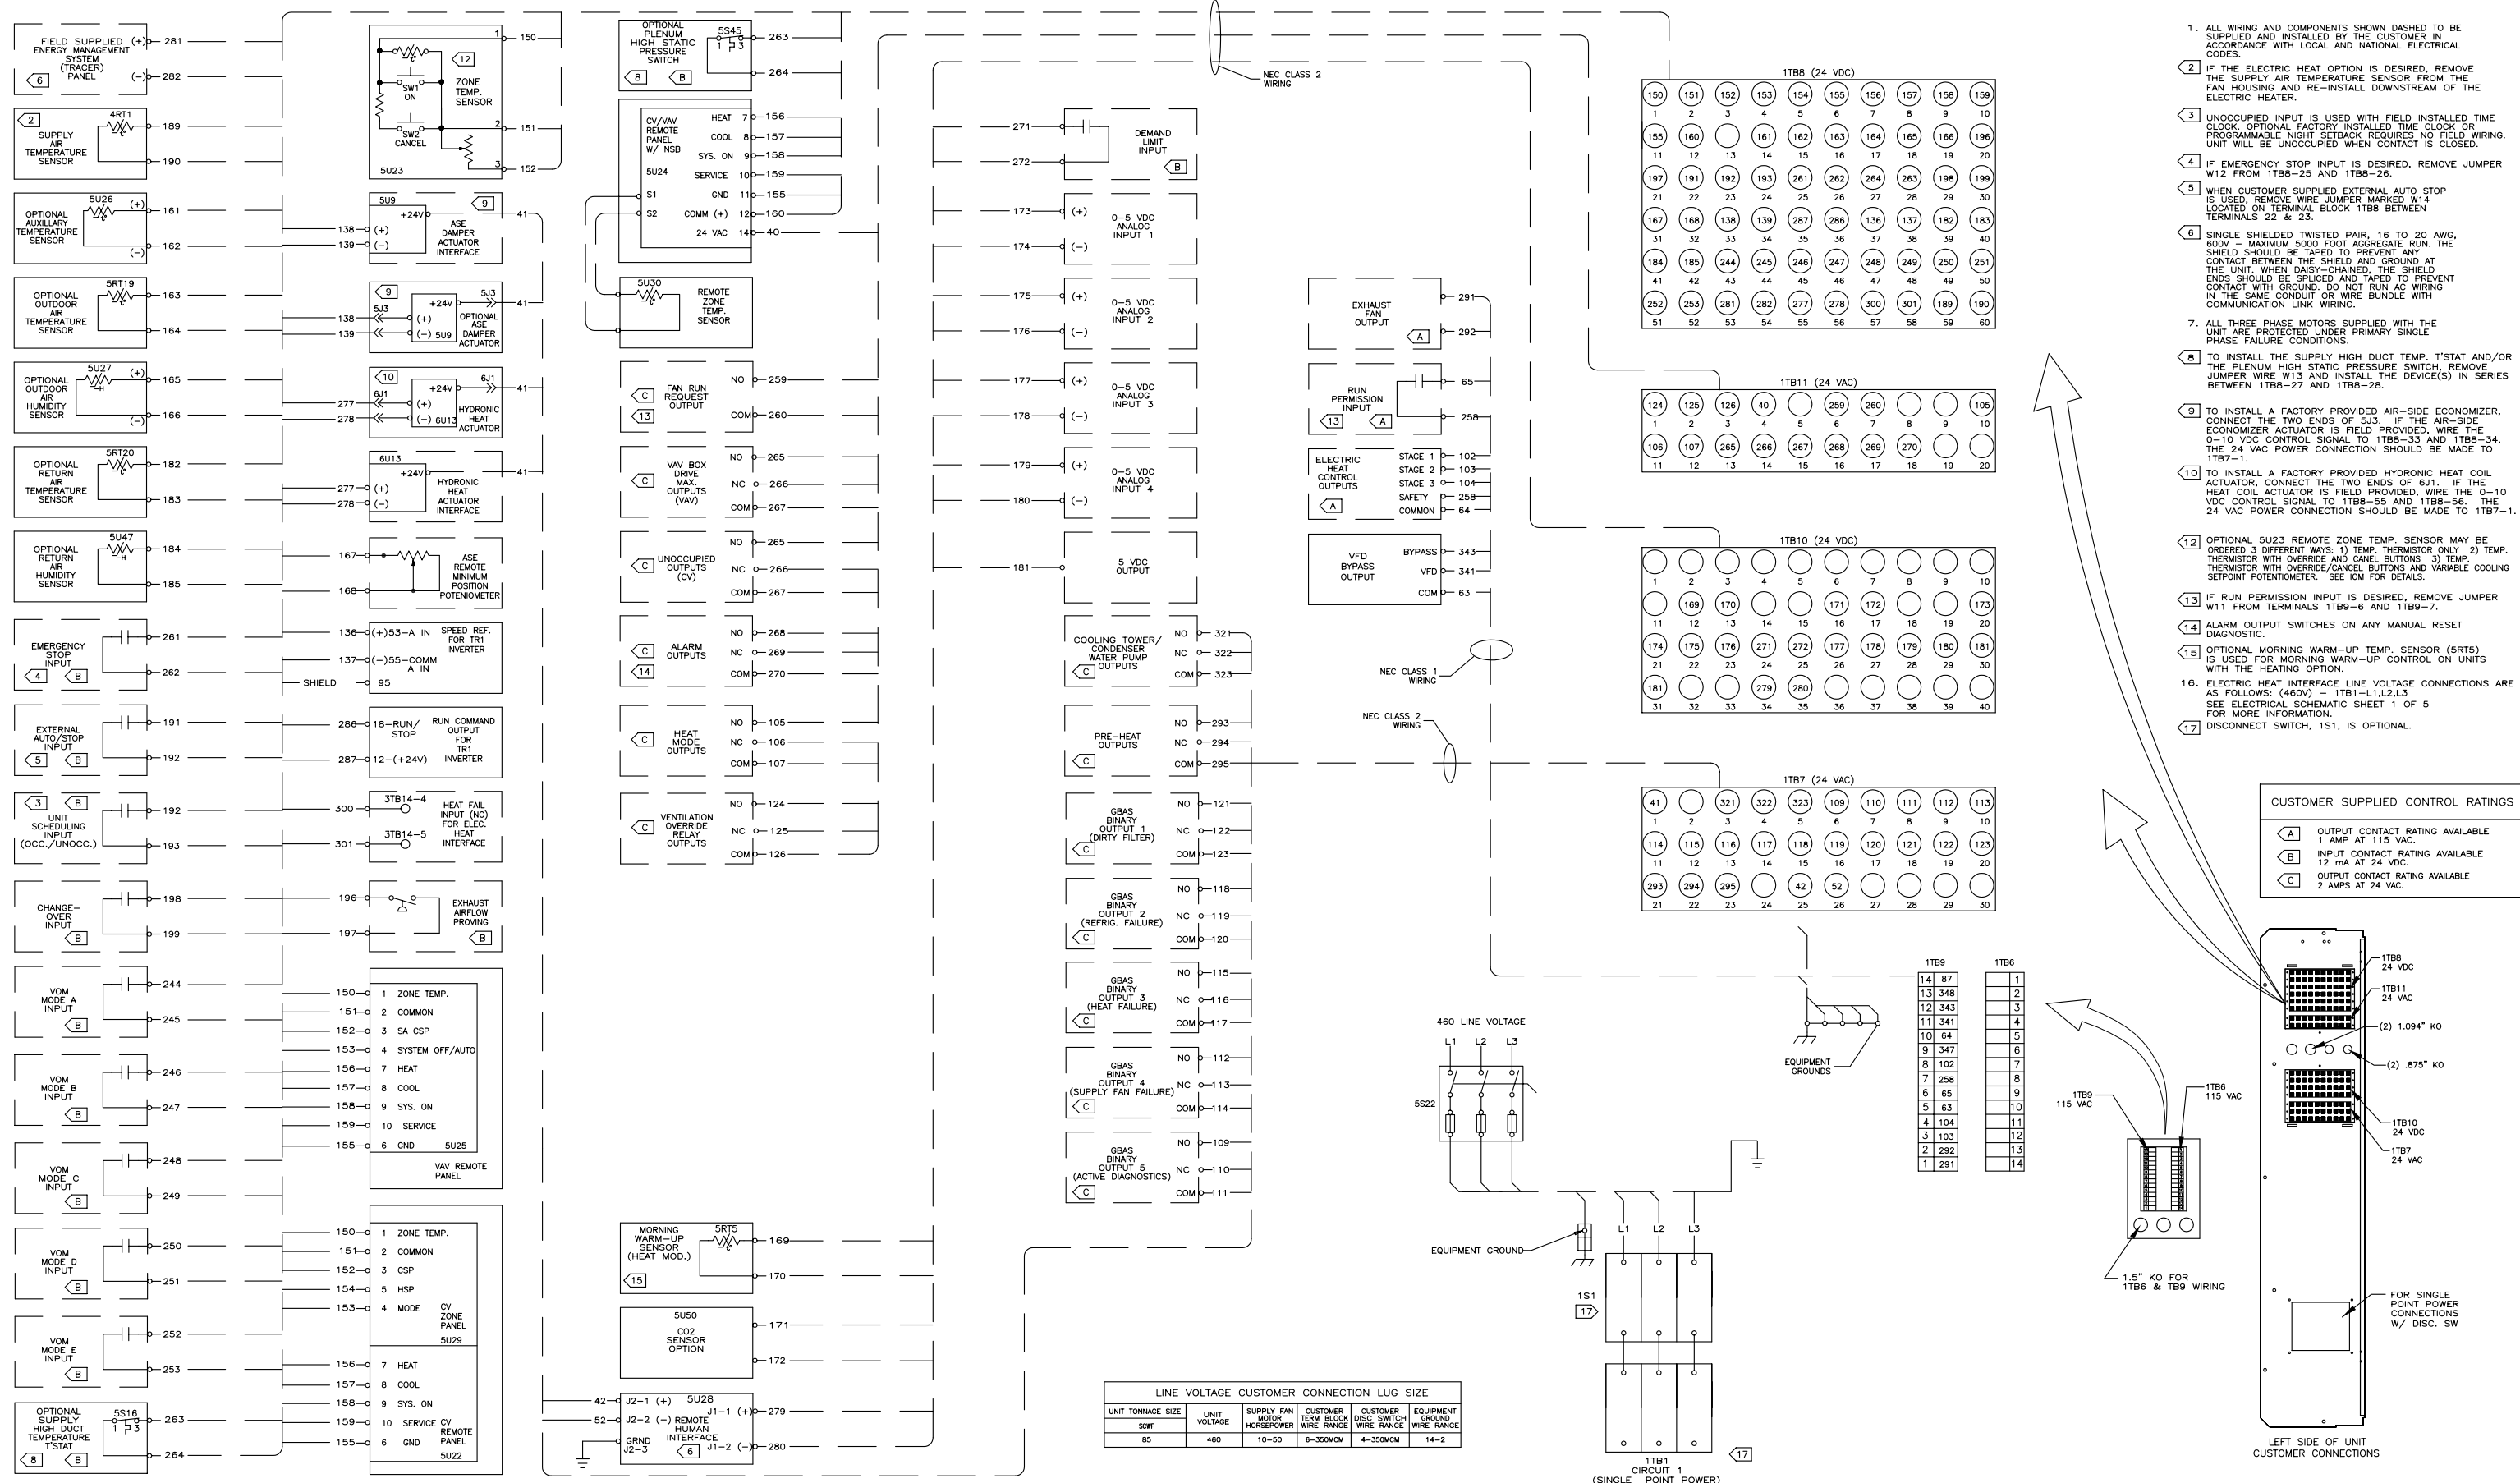

- ALL WIRING AND COMPONENTS SHOWN DASHED TO BE SUPPLIED AND INSTALLED BY THE CUSTOMER IN ACCORDANCE WITH LOCAL AND NATIONAL ELECTRICAL CODES.
- IF THE ELECTRIC HEAT OPTION IS DESIRED, REMOVE THE SUPPLY AIR TEMPERATURE SENSOR FROM THE FAN HOUSING AND RE-INSTALL DOWNSTREAM OF THE ELECTRIC HEATER.
- UNOCCUPIED INPUT IS USED WITH FIELD INSTALLED TIME CLOCK. OPTIONAL FACTORY INSTALLED TIME CLOCK OR PROGRAMMABLE NIGHT SETBACK REQUIRES NO FIELD WIRING. UNIT WILL BE UNOCCUPIED WHEN CONTACT IS CLOSED.
- IF EMERGENCY STOP INPUT IS DESIRED, REMOVE JUMPER W12 FROM 1TB8-25 AND 1TB8-26.
- WHEN CUSTOMER SUPPLIED EXTERNAL AUTO STOP IS USED, REMOVE WIRE JUMPER MARKED W14 LOCATED ON TERMINAL BLOCK 1TB8 BETWEEN TERMINALS 22 & 23.
- SINGLE SHIELDED TWISTED PAIR, 16 TO 20 AWG, 800V - MAXIMUM 5000 FOOT AGGREGATE RUN. THE SHIELD SHOULD BE TAPED TO PREVENT ANY CONTACT BETWEEN THE SHIELD AND GROUND AT THE UNIT WHEN DAISSY-CHAINED. THE SHIELD ENDS SHOULD BE SPLICED AND TAPED TO PREVENT CONTACT WITH GROUND. DO NOT RUN AC WIRING IN THE SAME CONDUIT OR WIRE BUNDLE WITH COMMUNICATION LINK WIRING.
- ALL THREE PHASE MOTORS SUPPLIED WITH THE UNIT ARE PROTECTED UNDER PRIMARY SINGLE PHASE FAILURE CONDITIONS.
- TO INSTALL THE SUPPLY HIGH DUCT TEMP. T'STAT AND/OR THE PLENUM HIGH STATIC PRESSURE SWITCH, REMOVE JUMPER WIRE W13 AND INSTALL THE DEVICE(S) IN SERIES BETWEEN 1TB8-27 AND 1TB8-28.
- TO INSTALL A FACTORY PROVIDED AIR-SIDE ECONOMIZER, CONNECT THE TWO ENDS OF 5U33 IF THE AIR-SIDE ECONOMIZER ACTUATOR IS FIELD PROVIDED, WIRE THE 0-10 VDC CONTROL SIGNAL TO 1TB8-33 AND 1TB8-34. THE 24 VAC POWER CONNECTION SHOULD BE MADE TO 1TB7-1.
- TO INSTALL A FACTORY PROVIDED HYDRONIC HEAT COIL ACTUATOR, CONNECT THE TWO ENDS OF 6J1. IF THE HEAT COIL ACTUATOR IS FIELD PROVIDED, WIRE THE 0-10 VDC CONTROL SIGNAL TO 1TB8-55 AND 1TB8-56. THE 24 VAC POWER CONNECTION SHOULD BE MADE TO 1TB7-1.
- OPTIONAL 5U23 REMOTE ZONE TEMP. SENSOR MAY BE ORDERED 3 DIFFERENT WAYS: 1) TEMP. THERMISTOR ONLY 2) TEMP. THERMISTOR WITH OVERRIDE AND CANCEL BUTTONS 3) TEMP. THERMISTOR WITH OVERRIDE/CANCEL BUTTONS AND VARIABLE COOLING SETPOINT POTENTIOMETER. SEE IOM FOR DETAILS.
- IF RUN PERMISSION INPUT IS DESIRED, REMOVE JUMPER W11 FROM TERMINALS 1TB9-6 AND 1TB9-7.
- ALARM OUTPUT SWITCHES ON ANY MANUAL RESET DIAGNOSTIC.
- OPTIONAL MORNING WARM-UP TEMP. SENSOR (5RT5) IS USED FOR MORNING WARM-UP CONTROL ON UNITS WITH THE HEATING OPTION.
- ELECTRIC HEAT INTERFACE LINE VOLTAGE CONNECTIONS ARE AS FOLLOWS: (460V) - 1TB1-L1,L2,L3 SEE ELECTRICAL SCHEMATIC SHEET 1 OF 5 FOR MORE INFORMATION.
- DISCONNECT SWITCH, 151, IS OPTIONAL.

CUSTOMER SUPPLIED CONTROL RATINGS

A	OUTPUT CONTACT RATING AVAILABLE 1 AMP AT 115 VAC.
B	INPUT CONTACT RATING AVAILABLE 12 mA AT 24 VDC.
C	OUTPUT CONTACT RATING AVAILABLE 2 AMPS AT 24 VAC.

LINE VOLTAGE CUSTOMER CONNECTION LUG SIZE

UNIT TONNAGE SIZE	UNIT VOLTAGE	SUPPLY FAN MOTOR HORSEPOWER	CUSTOMER TERM WIRE RANGE	CUSTOMER DISC SWITCH WIRE RANGE	EQUIPMENT GROUND WIRE RANGE
50WF	460	10-50	6-350MCM	4-350MCM	14-2
85	460	10-50	6-350MCM	4-350MCM	14-2

