


NOTES:

- 2 OPTIONAL CLOGGED FILTER SWITCH.
- 3 REQUIRED FOR OPTIONAL VENTILATION OVERRIDE.
- 4 REQUIRED FOR OPTIONAL REFERENCE ENTHALPY CONTROL.
- 5 REQUIRED FOR OPTIONAL COMPARATIVE ENTHALPY CONTROL.
- 6 WIRING SHOWN IS FOR UNITS WITHOUT OPTIONAL COMMUNICATIONS BOARD (LC1/TC1/BC1) OR DEHUMIDIFICATION. FOR OPTIONAL CONNECTIONS, SEE INSET A.
- 7 WIRING SHOWN IS FOR UNITS WITH OPTIONAL ECONOMIZER WITHOUT STATITRAC OPTION. FOR OPTIONAL CONNECTIONS, SEE INSET B.
- 8 REQUIRED FOR OPTIONAL 50% POWERED EXHAUST.
- 9 XFM2 REQUIRED FOR OPTIONAL 100% POWERED EXHAUST.
- 10 REQUIRED FOR OPTIONAL FRESH AIR TRACKING EXHAUST. NOTE: ON STATITRAC UNITS, CONNECTIONS ARE MADE WITH WIRES 182B AND 183B (NOT 182A AND 183A).
- 11 CUSTOMER TO PROVIDE WIRES 408A (WHT), 409A (BLK) AND GROUND WIRE (G/Y) WHEN FIELD POWERED.
- 12 WIRE 36AE IS NOT USED FOR 35 TON UNITS.
- 15 WIRES 51A, 52A, & 53A ARE USED ON LOW HEAT UNITS ONLY. ON HIGH HEAT UNITS, WIRES 51D, 52D, & 53D WILL BE PRESENT.
- 16 UNITS WITH LOW HEAT HAVE SINGLE HEAT EXCHANGER. HIGH HEAT UNITS HAVE TWO HEAT EXCHANGERS.
- 18 SEE APPLICABLE VARIABLE FREQUENCY DRIVE DIAGRAM FOR BALANCE OF CIRCUIT.
- 19 PLUGS LOCATED IN MAIN CONTROL PANEL.
- 20 WIRES REQUIRED FOR V.F.D. WITH BYPASS OPTION ONLY.


- 22 SENSOR EET AND WIRES 110A & 111A USED WITH OPTIONAL DEHUMIDIFICATION AND IS ATTACHED TO CIRCUIT 1 FOR 27.5-35 TON UNITS, AND TO CIRCUIT 2 FOR 40-50 TON UNITS.
- 23 WIRE 117A IS REQUIRED TO ENABLE DEHUMIDIFICATION. WIRES 141A AND 142A ARE USED WITH DEHUMIDIFICATION AND CUSTOMER INSTALLED SPACE HUMIDITY SENSOR (SHS). WIRES 112A AND 113A ARE USED WITH DEHUMIDIFICATION AND CUSTOMER INSTALLED HUMIDISTAT (HS).

FUSE REPLACEMENT TABLE				
FU1	208-230V	CLASS CC	20 AMP	
FU2	380-415V	CLASS CC	15 AMP	
	460-575V	CLASS CC	15 AMP	
FU3	208-230V	CLASS CC	15 AMP	
FU4	380-415V	N/A	N/A	
	460-575V	N/A	N/A	
FU5	208-230V	CLASS CC	15 AMP	
FU6	380-415V	CLASS CC	5 AMP	
	460-575V	CLASS CC	5 AMP	
FU20	208-230V	CLASS CC	10 AMP	
FU21	460-575V	CLASS CC	5 AMP	


INSET A - OPTIONAL MODBUS CONNECTIONS




DEHUMIDIFICATION WITHOUT OPTIONAL COMM.



INSET B - STATITRAC MODBUS CONNECTIONS



CONDENSER SECTION WIRING

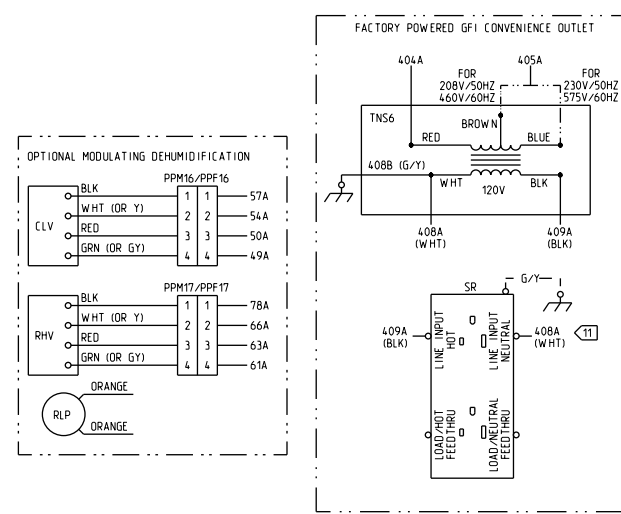

11 X 17 METAL PLATE

TO 114A (CNTL BOX) BLUE LPC1
TO 118A (CNTL BOX) BLUE LPC1


TRANE

THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO ANY OTHER PARTIES WITHOUT THE CONSENT OF TRANE.

DRAWN BY: B. HARPER
REPLACES: PRO/DETAIL
DATE: 6/16/11
REVISION DATE:

FILE NUMBER: 2313-0663
DRAWING NUMBER: 2313-0775
SHEET: 1 OF 1
REV: A


VOYAGER 3
RACEWAY DEVICES CONNECTION PRINT
27.5-35 TON
SINGLE ZONE VARIABLE AIR VOLUME
MODULATING GAS HEAT

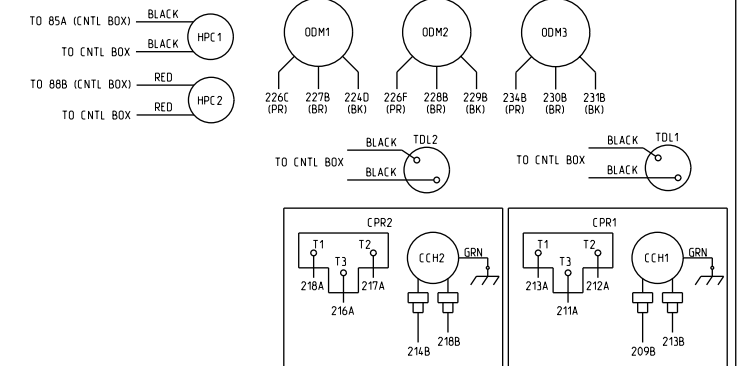

HEAT SECTION WIRING

HIGH HEAT <16

LOW HEAT <16

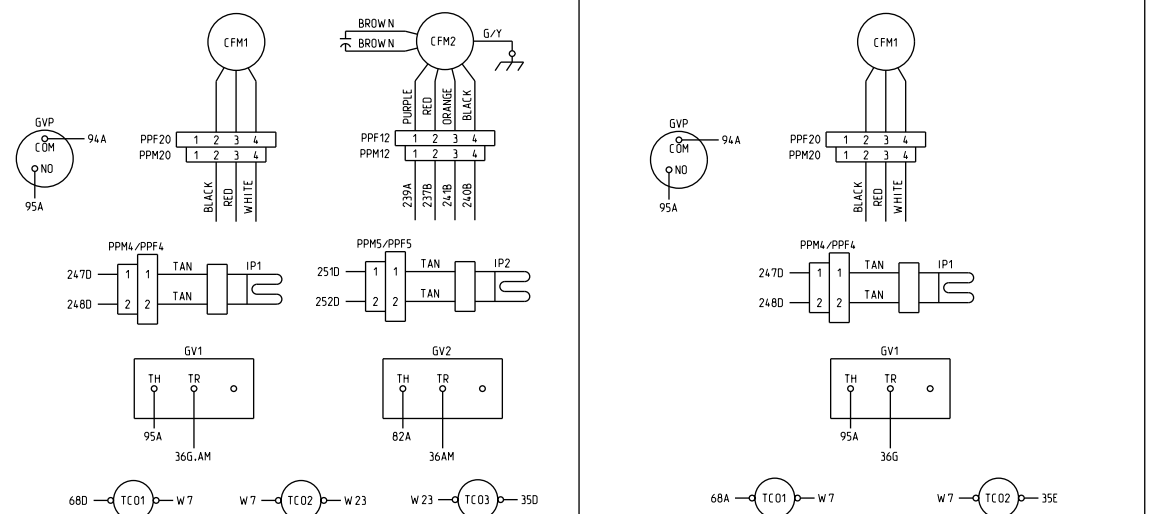

RETURN AIR SECTION WIRING

SUPPLY AIR SECTION WIRING

