


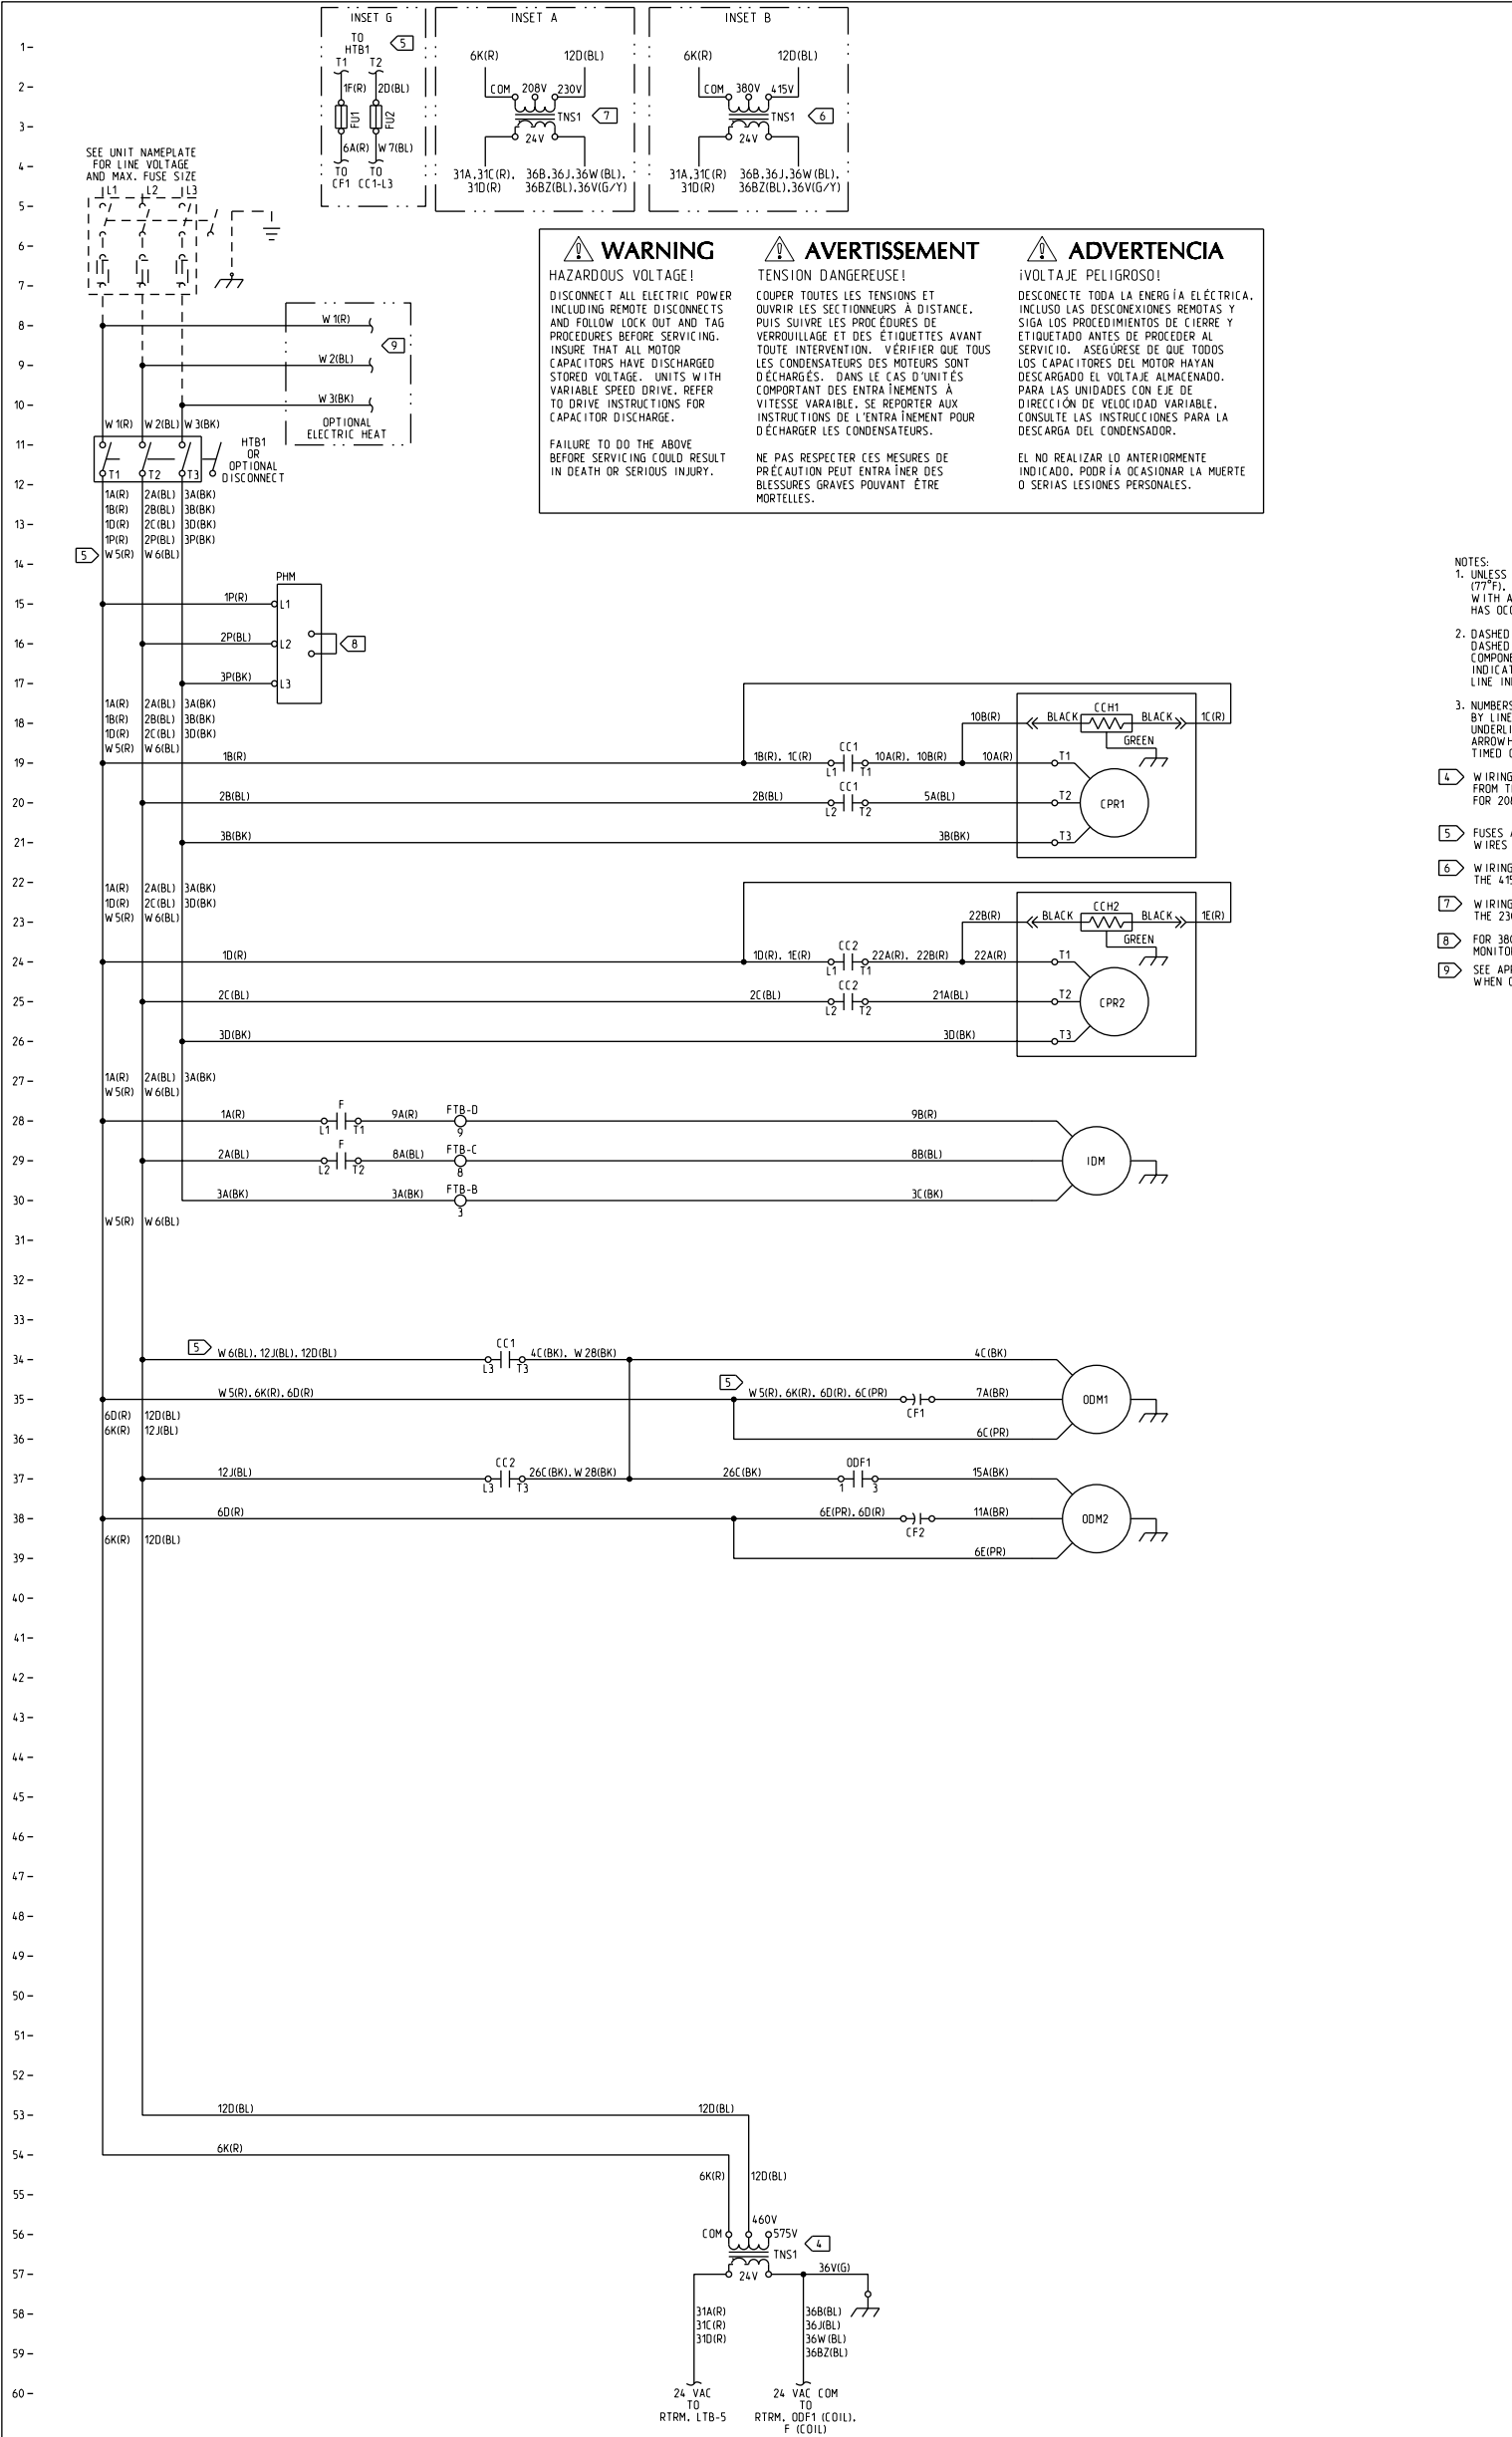

LEGEND		
DEVICE DESIG	DESCRIPTION	LINE NUMBER
CC1	CONTACTOR - COMPRESSOR	19,20,34
CC2	CONTACTOR - COMPRESSOR	24,25,37
CCH1	HEATER - CRANKCASE	18
CCH2	HEATER - CRANKCASE	23
CF1	CAPACITOR - OD MOTOR	35
CF2	CAPACITOR - OD MOTOR	38
CPR1	COMPRESSOR	21
CPR2	COMPRESSOR	26
F	CONTACTOR - INDOOR FAN	28,29
FTB	TERMINAL BLOCK - INDOOR FAN	28,29,30
FU1	FUSE - 200-380 VAC POWER	3
FU2	FUSE - 200-380 VAC POWER	3
HTB1	MANUAL DISCONNECT/TERM BLOCK	11
IDM	MOTOR - INDOOR	28
ODF1	CONTACTOR - OUTDOOR FAN	37
ODM1	MOTOR - OUTDOOR	34
ODM2	MOTOR - OUTDOOR	37
PHM	MODULE - PHASE MONITOR	15
TNS1	TRANSFORMER - CONTROLS POWER	56

- NOTES:
- UNLESS OTHERWISE NOTED, ALL SWITCHES ARE SHOWN AT 25°C (77°F), AT ATMOSPHERIC PRESSURE, AT 50% RELATIVE HUMIDITY, WITH ALL UTILITIES TURNED OFF, AND AFTER A NORMAL SHUTDOWN HAS OCCURRED.
 - DASHED LINES INDICATE RECOMMENDED FIELD WIRING BY OTHERS. DASHED LINE ENCLOSURES AND/OR DASHED DEVICE OUTLINES INDICATE COMPONENTS PROVIDED BY THE FIELD. PHANTOM LINE ENCLOSURES INDICATE ALTERNATE CIRCUITRY OR AVAILABLE SALES OPTIONS. SOLID LINE INDICATES WIRING BY TRANE CO.
 - NUMBERS ALONG THE RIGHT SIDE MARGIN OF THE SCHEMATIC DESIGNATE, BY LINE NUMBER, THE LOCATION OF CONTACTS ENERGIZED BY COIL. AN UNDERLINED NUMBER INDICATES A NORMALLY CLOSED