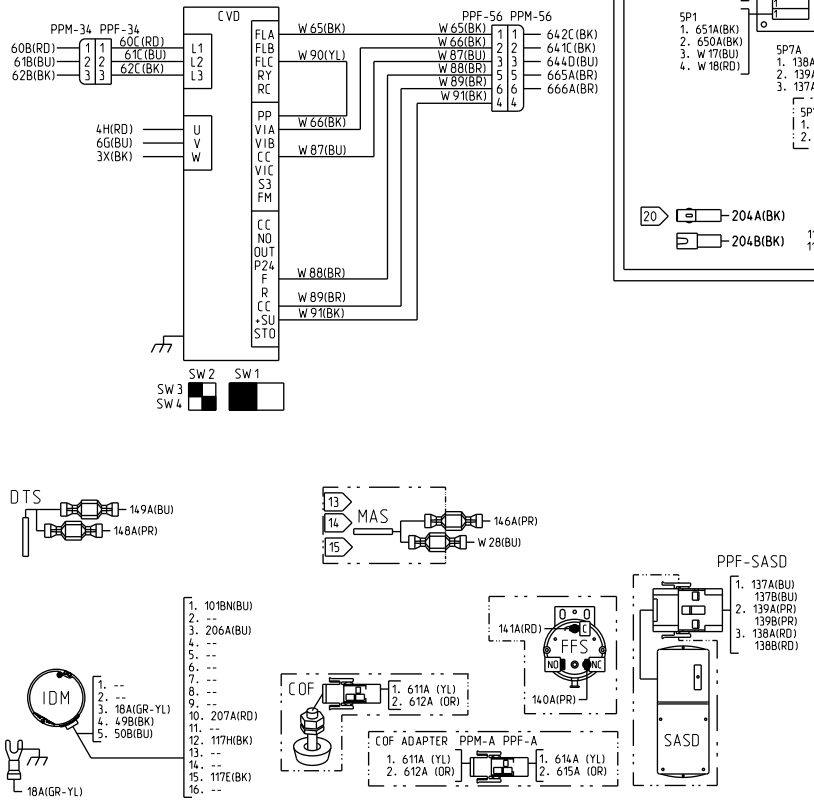


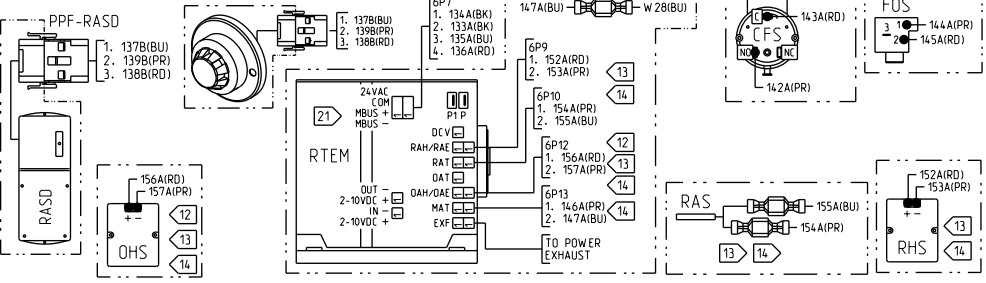
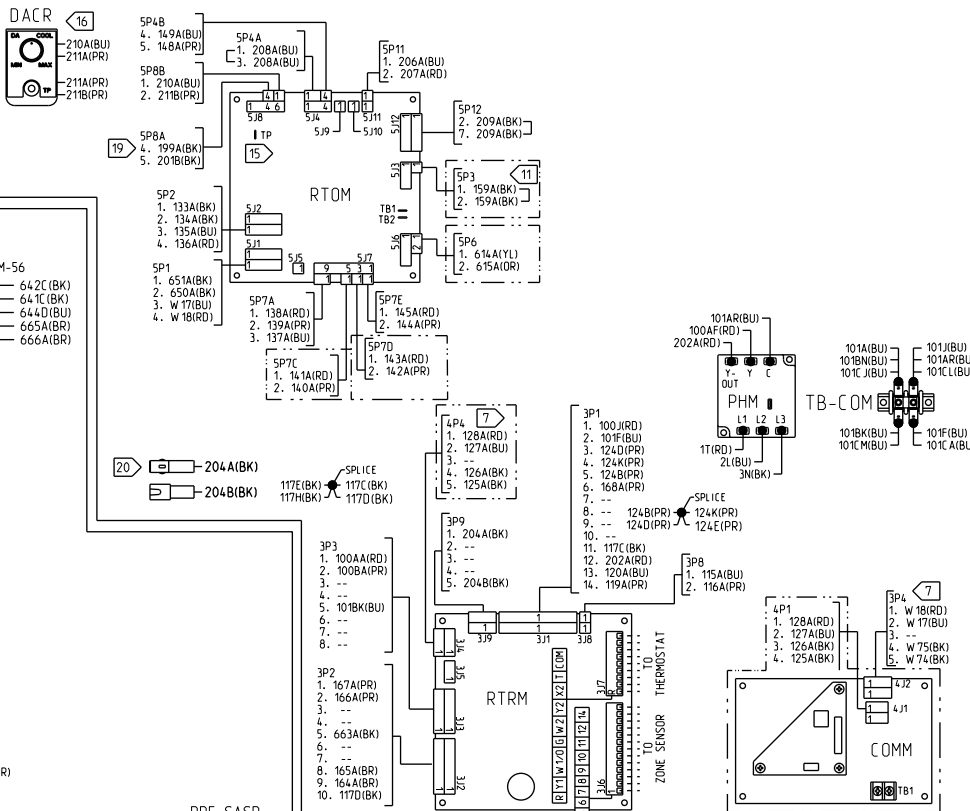
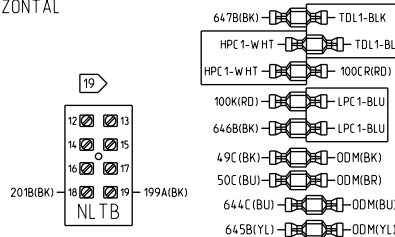
NOTES:

1. NOTES ARE ON POWER DIAGRAM.

SUPPLY AIR SECTION




RETURN AIR SECTION

CONTROL BOX - VERTICAL
LOW VOLTAGECONTROL BOX - HORIZONTAL
LOW VOLTAGE

HEATER SECTION

PPM-HEAT PPF-HEAT

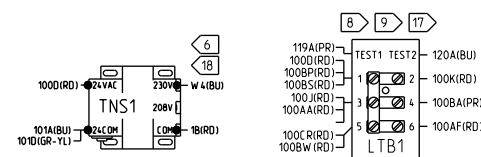
CONTROL BOX - VERTICAL
HIGH VOLTAGE

PPF-CONFIG	PPM-CONFIG
100BR(BK)	1 100BP(RD)
100BV(BK)	2 100BW(RD)
100BY(BK)	3 100BS(RD)
100CA(BK)	4 100BS(RD)
100BT(BK)	5 100BS(RD)


TONNAGE CONFIGURATION
4T = 100BU(RD) PIN 2
5T = 100BW(RD) PIN 3

PPF-VSM	PPM-VSM
101C(BK)	1 101CA(BU)
101CK(BK)	2 101CLD W (BU)
640A(BK)	3 640B(BK)
641A(BK)	4 641B(BK)
644A(BK)	5 644B(BK), C(BU)
643A(BK)	6 643B(BK)
642A(BK)	7 642B(BK)
645A(BK)	8 645B(YL)
646A(BK)	9 646B(BK)
647A(BK)	10 647B, C(BK)

CCHR	CCH-BLACK
01 2 30	
04 5 60	
07 8 90	
0A B0	

CONTROL BOX - HORIZONTAL
HIGH VOLTAGE

OUTDOOR SECTION



TRANE THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF TRANE DRAWN BY: R. JOHNSON DATE: 11-FEB-2015 DO NOT SCALE PRINT		43668961 DIAGRAM CONNECTION PRINT COOLING ONLY, 5 TON, 230V ULTRA HIGH EFFICIENCY VSC	REV C
--	--	---	----------

CAUTION

USE COPPER CONDUCTORS ONLY!
UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS.
FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT.

ATTENTION


N'UTILISER QUE DES CONDUCTEURS EN CUIVRE!
LES BORNES DE L'UNITÉ NE SONT PAS CONÇUES POUR RECEVOIR D'AUTRES TYPES DE CONDUCTEURS.

L'UTILISATION DE TOUT AUTRE CONDUCTEUR PEUT ENDOMMAGER L'EQUIPEMENT.

PRECAUCIÓN

UTILICE ÚNICAMENTE CONDUCTORES DE COBRE!
LAS TERMINALES DE LA UNIDAD NO ESTÁN DISEÑADAS PARA ACEPTAR OTROS TIPOS DE CONDUCTORES.

SI NO LO HACE, PUEDE OCASIONAR DAÑO AL EQUIPO.



SEE NAMEPLATE FOR LINE VOLTAGE AND MAX FUSE SIZE

