Extreme Condition Mounting Kit

BAYECMT003A for Impack Slab Mounting

AWARNING: HAZARDOUS VOLTAGE - DISCONNECT POWER BEFORE SERVICING

ALL phases of this installation must comply with NATIONAL, STATE AND LOCAL CODES

IMPORTANT — This Document is **customer property** and is to remain with this unit. Please return to service information pack upon completion of work.

KIT CONTENT:

Bracket-Hold Down* and Label - Qty 4 (Height 1-7/8" for Impack and T/WCH048-60)

Bracket-Hold Down* and Label - Qty 4 (Height 2-3/8" for T/WCH024-42 and TCK024-48) * G90 Steel

Self drilling 12-14 Screws - Qty 8

INSPECTION:

Check carefully for any shipping damage. This must be reported to and claims made against the transportation company immediately. Any missing parts should be reported to your supplier at once and replaced with authorized parts only.


INSTALLATION:

1. Attach the (4) Base Brackets to the unit base using (4) of the #12 3/4" self drilling screws in the kit into a existing screw location., locating them two to each long side of the unit using (4) field provided bolts appropriate to the material the unit is mounted on (recommend a 0.25" diameter bolt with a minimum of SAE-Grade 5 (ASTM-A449) or better with appropriate washer). See figures 1,2,3.


BAYECMT003A

REPLACE AFTER SERVICE


D671117P01

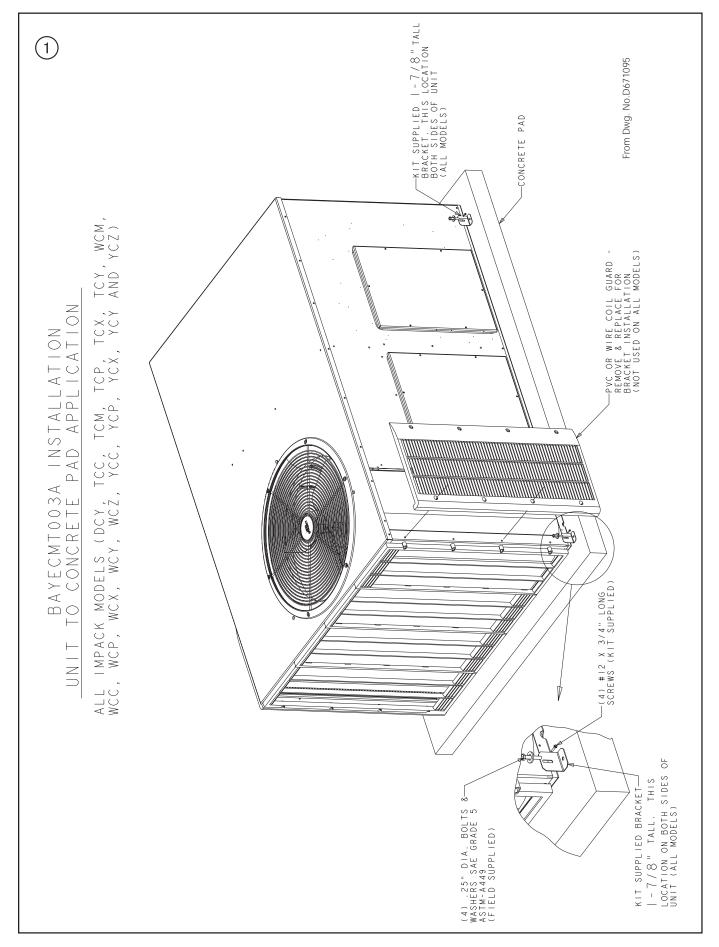

2 ABS-PRC006-EN

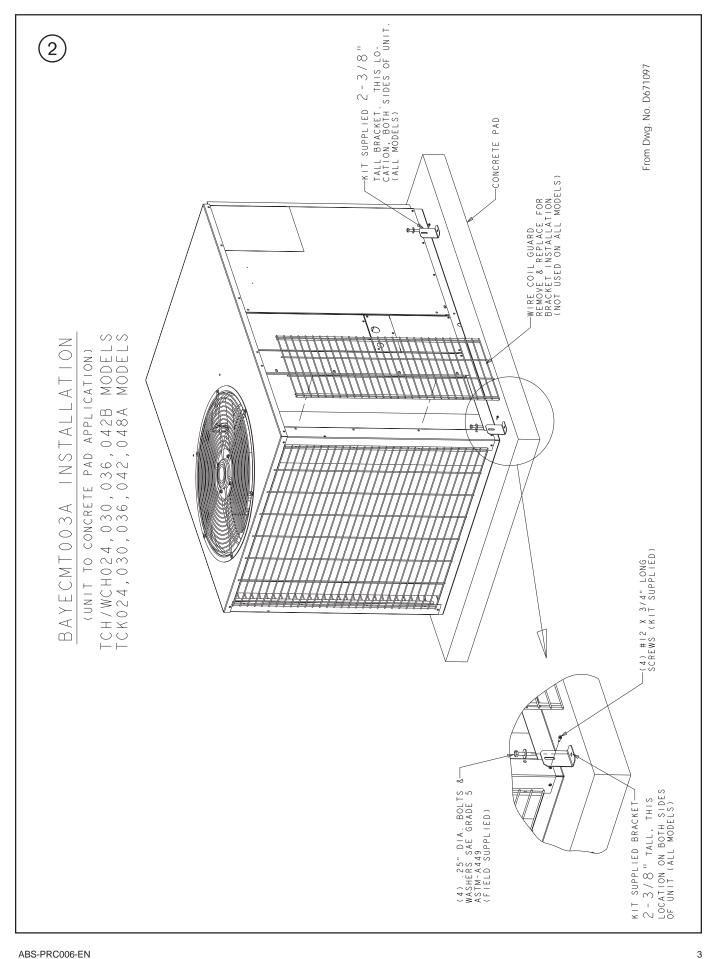

ABS-PRC006-EN

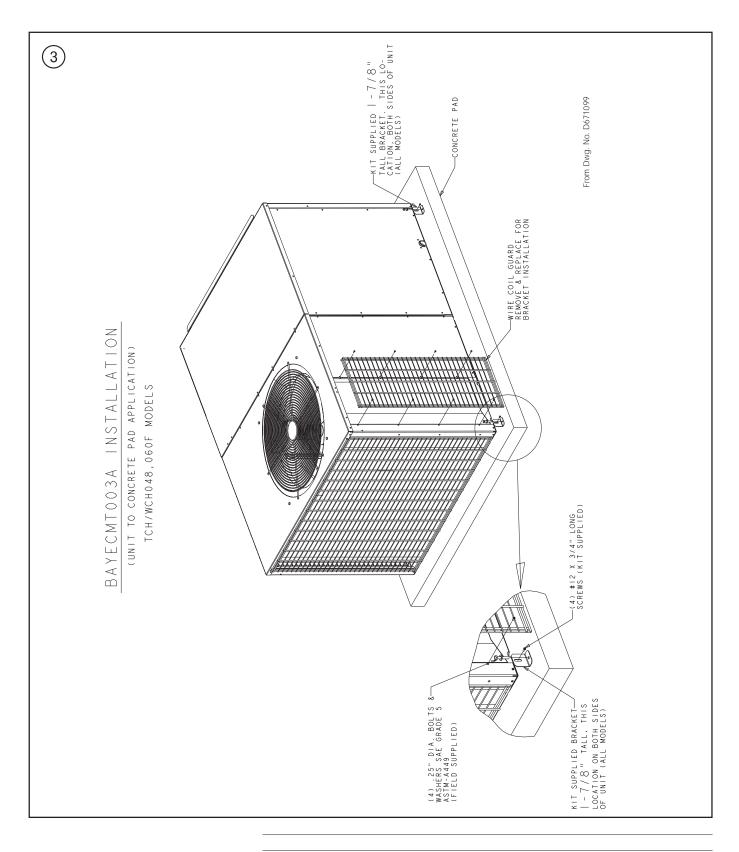

Trane A business of American Standard Companies

CM 03/04