


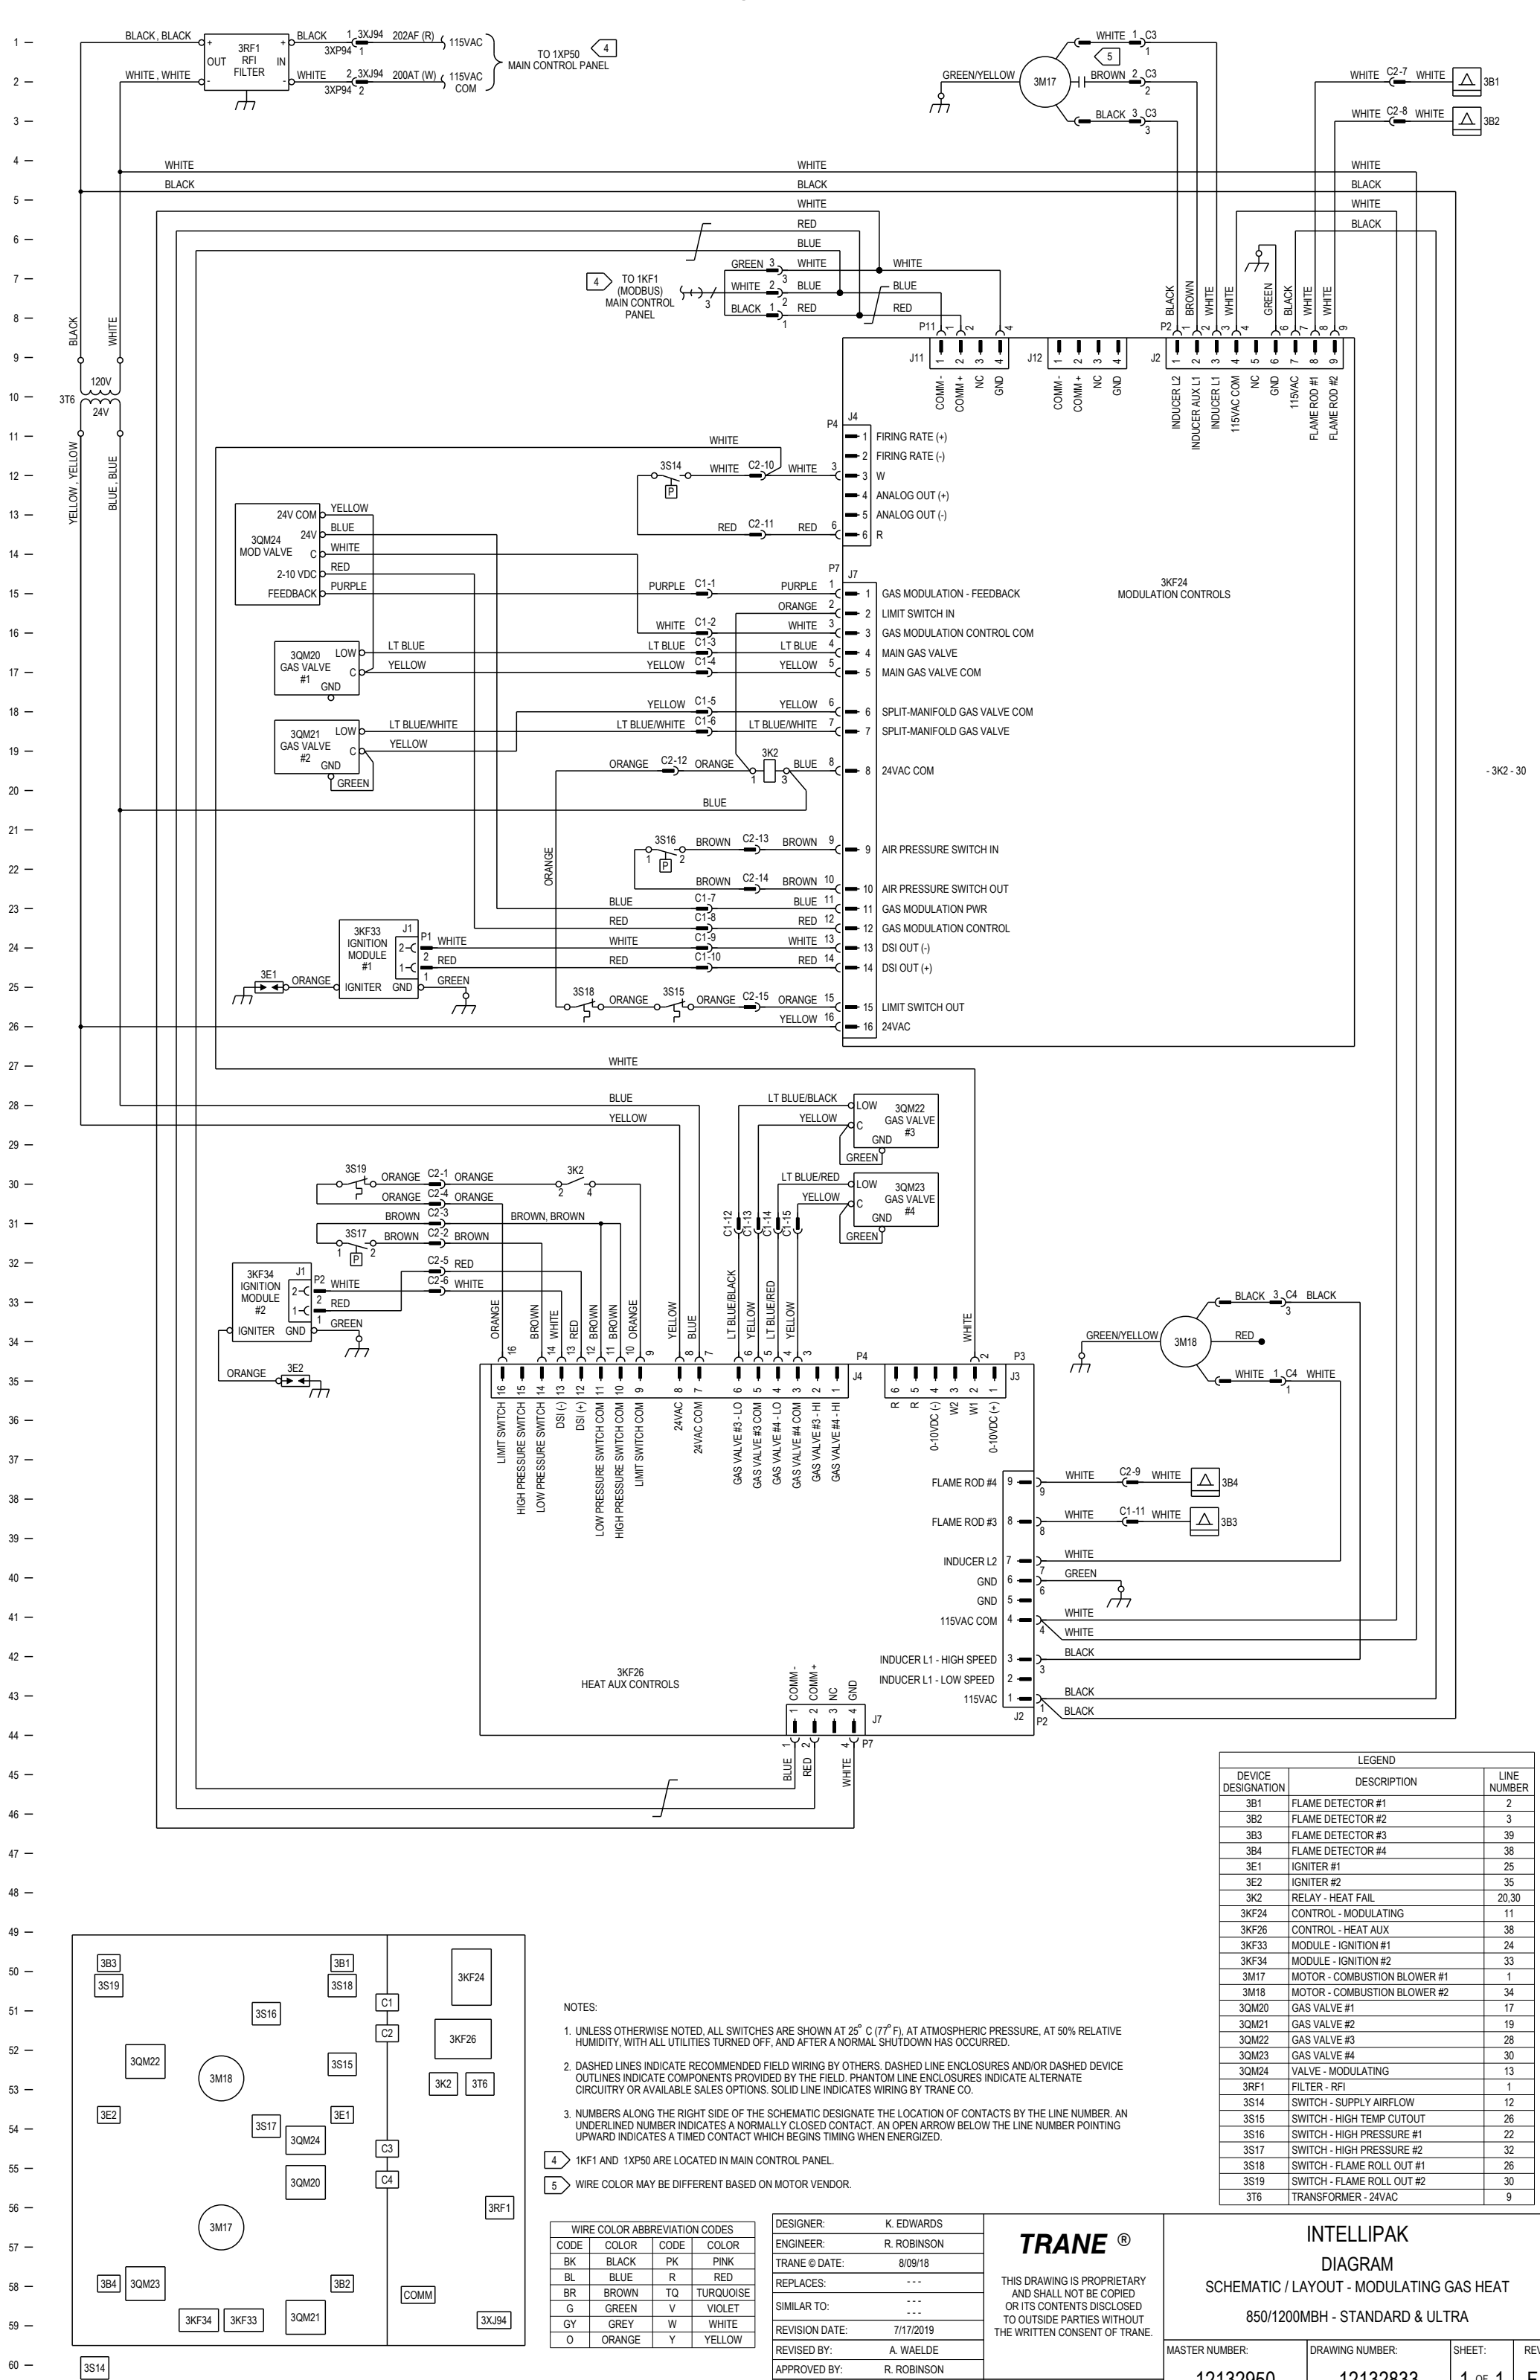

- 3K2 - 30

LEGEND		
DEVICE DESIGNATION	DESCRIPTION	LINE NUMBER
3B1	FLAME DETECTOR #1	2
3B2	FLAME DETECTOR #2	3
3B3	FLAME DETECTOR #3	39
3B4	FLAME DETECTOR #4	38
3E1	IGNITER #1	25
3E2	IGNITER #2	35
3K2	RELAY - HEAT FAIL	20,30
3KF24	CONTROL - MODULATING	11
3KF26	CONTROL - HEAT AUX	38
3KF33	MODULE - IGNITION #1	24
3KF34	MODULE - IGNITION #2	33
3M17	MOTOR - COMBUSTION BLOWER #1	1
3M18	MOTOR - COMBUSTION BLOWER #2	34
3QM20	GAS VALVE #1	17
3QM21	GAS VALVE #2	19
3QM22	GAS VALVE #3	28
3QM23	GAS VALVE #4	30
3QM24	VALVE - MODULATING	13
3RF1	FILTER - RFI	1
3S14	SWITCH - SUPPLY AIRFLOW	12
3S15	SWITCH - HIGH TEMP CUTOUT	26
3S16	SWITCH - HIGH PRESSURE #1	22
3S17	SWITCH - HIGH PRESSURE #2	32
3S18	SWITCH - FLAME ROLL OUT #1	26
3S19	SWITCH - FLAME ROLL OUT #2	30
3T6	TRANSFORMER - 24VAC	9

- NOTES:
- UNLESS OTHERWISE NOTED, ALL SWITCHES ARE SHOWN AT 25° C (77° F), AT ATMOSPHERIC PRESSURE, AT 50% RELATIVE HUMIDITY, WITH ALL UTILITIES TURNED OFF, AND AFTER A NORMAL SHUTDOWN HAS OCCURRED.
 - DASHED LINES INDICATE RECOMMENDED FIELD WIRING BY OTHERS. DASHED LINE ENCLOSURES AND/OR DASHED DEVICE OUTLINES INDICATE COMPONENTS PROVIDED BY THE FIELD. PHANTOM LINE ENCLOSURES INDICATE ALTERNATE CIRCUITRY OR AVAILABLE SALES OPTIONS. SOLID LINE INDICATES WIRING BY TRANE CO.
 - NUMBERS ALONG THE RIGHT SIDE OF THE SCHEMATIC DESIGNATE THE LOCATION OF CONTACTS BY THE LINE NUMBER. AN UNDERLINED NUMBER INDICATES A NORMALLY CLOSED CONTACT. AN OPEN ARROW BELOW THE LINE NUMBER POINTING UPWARD INDICATES A TIMED CONTACT WHICH BEGINS TIMING WHEN ENERGIZED.
- 4 1KF1 AND 1XP50 ARE LOCATED IN MAIN CONTROL PANEL.
- 5 WIRE COLOR MAY BE DIFFERENT BASED ON MOTOR VENDOR.

WIRE COLOR ABBREVIATION CODES

CODE	COLOR	CODE	COLOR
BK	BLACK	PK	PINK
BL	BLUE	R	RED
BR	BROWN	TQ	TURQUOISE
G	GREEN	W	VIOLET
GY	GREY	V	WHITE
O	ORANGE	Y	YELLOW

DESIGNER: K. EDWARDS

ENGINEER: R. ROBINSON

TRANE © DATE: 8/09/18

REPLACES: ---

SIMILAR TO: ---

REVISION DATE: 7/17/2019

REVISED BY: A. WAELDE

APPROVED BY: R. ROBINSON

CAD SYSTEM USED: PRO / DIAGRAM

TRANE®

THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF TRANE.

IEC DESIGN COMPLIANT

INTELLIPAK

DIAGRAM

SCHEMATIC / LAYOUT - MODULATING GAS HEAT

850/1200MBH - STANDARD & ULTRA

MASTER NUMBER: 12132950

DRAWING NUMBER: 12132833

SHEET: 1 OF 1

REV: F