


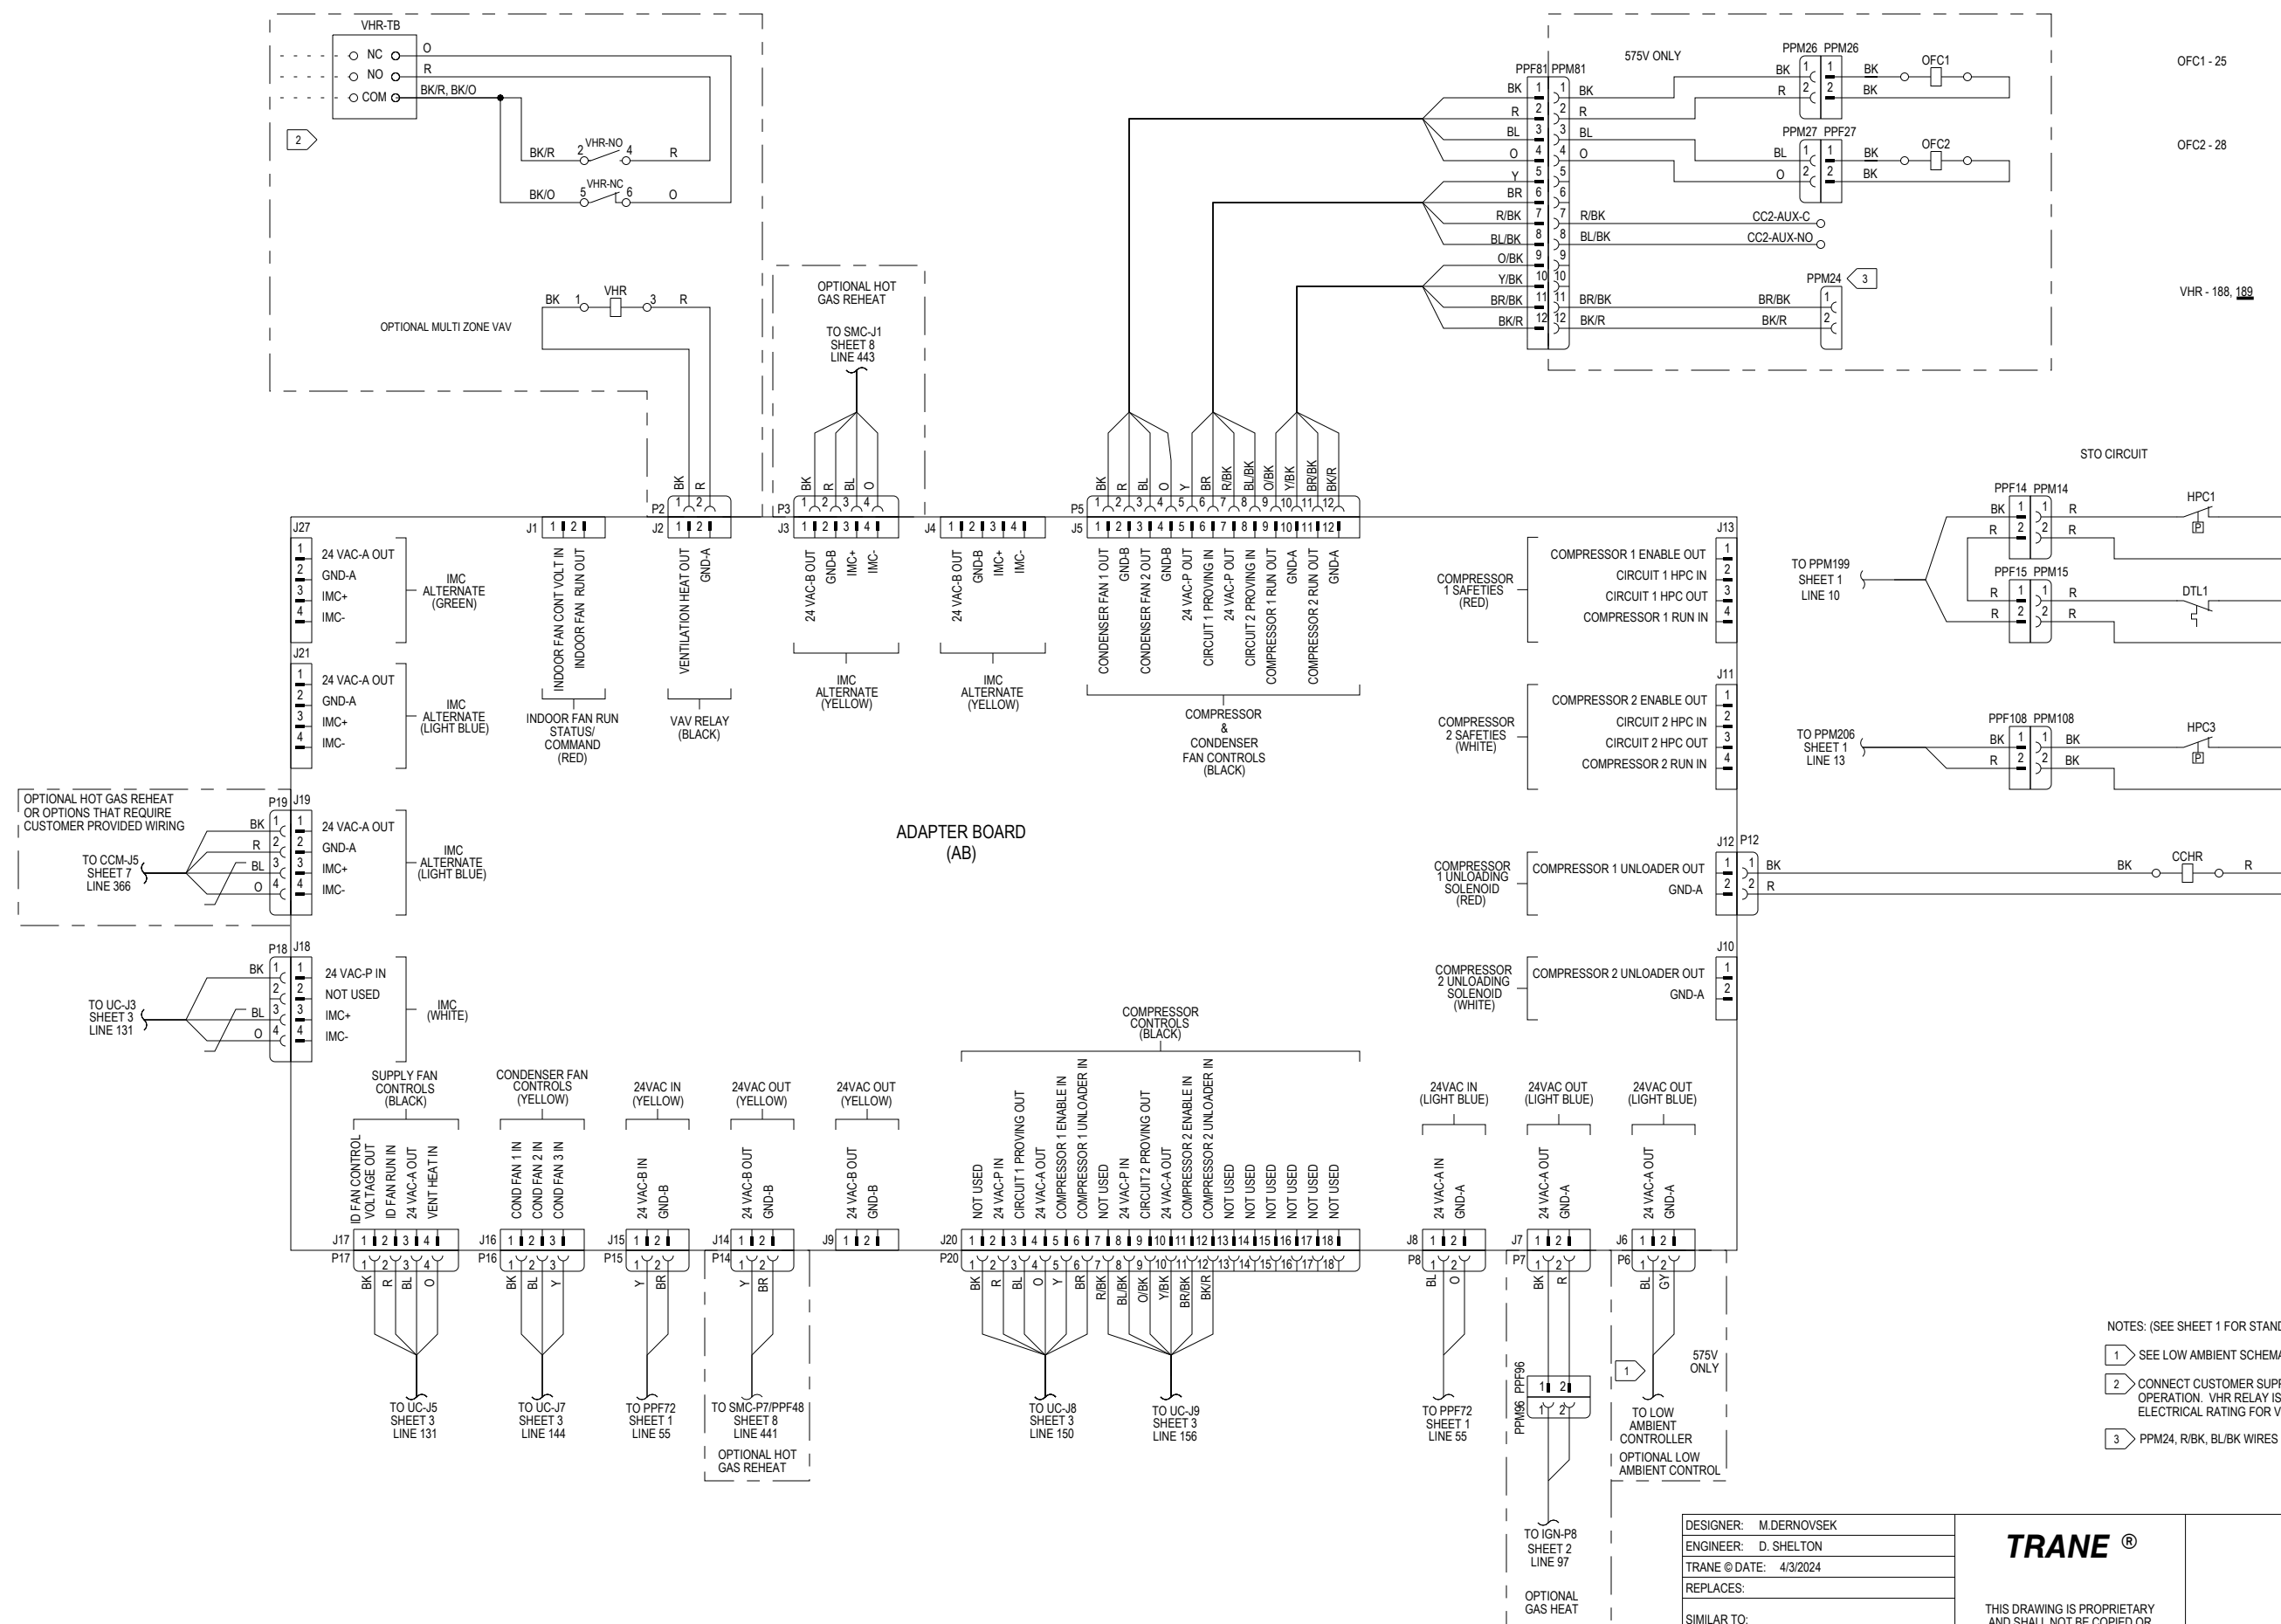

LEGEND		
REF DES	DESCRIPTION	LINE NO
AB	MODULE - ADAPTER BOARD	201
CCHR	CONTACTOR - CRANKCASE HEATER	212
DTL1	SWITCH - DISCHARGE TEMP LIMIT 1	202
HPC1	SWITCH - HIGH PRESSURE CUT OUT 1	199
HPC3	SWITCH - HIGH PRESSURE CUT OUT 3	207
OFC1	CONTACTOR - OUTDOOR FAN 1	184
OFC2	CONTACTOR - OUTDOOR FAN 2	187
VHR	RELAY - VENTILATION HEAT	192
VHR-NC	CONTACT - NORMALLY CLOSED, VHR	189
VHR-NO	CONTACT - NORMALLY OPEN, VHR	187
VHR-TB	TERMINAL BLOCK - VENTILATION HEAT	184

- NOTES: (SEE SHEET 1 FOR STANDARD NOTES 1-3, WIRE COLOR & SYMBOL LEGEND TABLES.)
- 1 SEE LOW AMBIENT SCHEMATIC FOR BALANCE OF CIRCUIT.
 - 2 CONNECT CUSTOMER SUPPLIED DEVICE TO VHR-TB FOR VENTILATION HEAT OPERATION. VHR RELAY IS ACTIVE WHEN UNIT IS IN HEAT MODE. ELECTRICAL RATING FOR VHR CONTACTS: 3A @ 277VAC
 - 3 PPM24, R/BK, BL/BK WIRES NOT USED IN SINGLE COMPRESSOR UNITS.

DESIGNER: M.DERNOVSEK
ENGINEER: D. SHELTON
TRANE © DATE: 4/3/2024
REPLACES:
SIMILAR TO:
REVISION DATE: 5/22/2024
REVISED BY: M.DERNOVSEK
APPROVED BY: D. SHELTON
CAD SYSTEM USED: CREO SCHEMATICS

TRANE®

THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF TRANE.

PRECEDENT
UNIT SCHEMATIC
SCHEMATIC; SHEET 4, CONTROLS,
ADAPTER BOARD UNIT CONTROLS,
SINGLE COMPRESSOR, DUAL FAN, EFLEX

MASTER NUMBER:	DRAWING NUMBER:	SHEET:	REV
	12135021	4	B