




# Product and Submittal Data

## Split System Cooling

5TTR4018A1000A  
5TTR4024A1000A  
5TTR4030A1000A/B  
5TTR4036A1000A/B  
5TTR4042A1000A/B  
5TTR4048A1000A/B  
5TTR4060A1000A/B

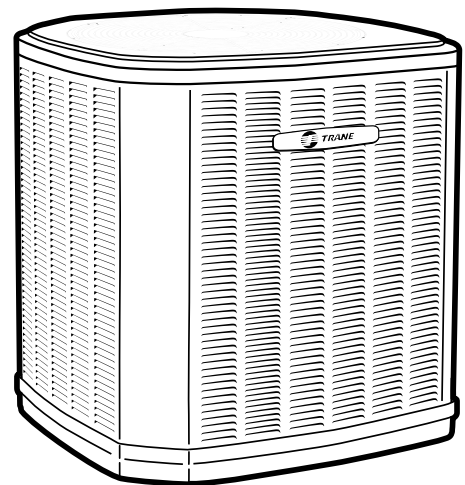

*Note: Graphics in this document are for representation only.  
Actual model may differ in appearance.*



## Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

## Trademark

All trademarks referenced in this document are the trademarks of their respective owners.

## Data Notes

This document supersedes and includes data from the documents listed below.

**Table 1. Data notes**

Literature Number	Title
ODR-PRD025*-EN	Split System Cooling 5TTR4 Product Data
5TTR4018A-SUB-1*	Submittal, 1.5 Ton Split System Cooling 5TTR4018A
5TTR4024A-SUB-1*	Submittal, 2.0 Ton Split System Cooling 5TTR4024A
TA43-PRQ001*	Split System Cooling 2.5 Ton 5TTR4030A1000A/B
TA44-PRQ001*	Split System Cooling 3.0 Ton 5TTR4036A1000A/B
TA45-PRQ001*	Split System Cooling 3.5 Ton 5TTR4042A1000A/B
TA46-PRQ001*	Split System Cooling 4.0 Ton 5TTR4048A1000A/B
5TTR4060A-SUB-1*	Submittal, 5.0 Ton Split System Cooling 5TTR4060A



# Table of Contents

Product Specifications .....	4
Sound Power Level .....	7
Accessory Description and Usage .....	8
Model Nomenclature .....	8
Wiring Diagrams .....	9
Dimensional Data .....	13
Mechanical Specification Options .....	14



# Product Specifications

**Table 2. 5TTR4018 – 5TTR4036**

Model No. <sup>(a)</sup> <sup>(b)</sup>	5TTR4018A1000A	5TTR4024A1000A	5TTR4030A1000A/B	5TTR4036A1000A/B
Power Conns. - V/PH/Hz <sup>(c)</sup>	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
Min. BRCH. CIR. Ampacity	9	14	16/17	18
BR. CIR. PROT. RTG. - Max. (Amps)	20	25	25	30
<b>Compressor</b>	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL
No. Used - No. Stages	1 - 1	1 - 1	1 - 1	1 - 1
Volts/Ph/Hz	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
RL Amps <sup>(d)</sup> - LR Amps	6.9 - 45	10.3 - 60	12.5 - 72.1 / 12.7 - 76	13.5 - 75.0 / 13.5 - 82.8
Factory Installed				
Start Components <sup>(e)</sup>	NO	NO (Uses BAYKSKT263)	NO	NO (Uses BAYKSKT263)
Insulation/Sound Blanket	NO	NO	NO	NO
Compressor Heat	NO	NO	NO	NO
<b>Outdoor Fan</b>	PROPELLER	PROPELLER	PROPELLER	PROPELLER
Dia. (in.) - No. Used	23.02 - 1	23 - 1	23.0 - 1	23 - 1
Type Drive - No. Speeds	DIRECT - 1	DIRECT - 1	DIRECT - 1	DIRECT - 1
CFM @ 0.0 (in.) W.G. <sup>(f)</sup>	2992	3068	3243	3124
No. Motors - HP	1 - 1/8	1 - 1/8	1 - 1/8	1 - 1/8
Motor Speed R.P.M.	825	825	1100	1100
Volts/Ph/Hz	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
FL Amps	0.71	0.71	0.85	0.85
<b>Outdoor Coil - Type</b>	SPINE FIN™	SPINE FIN™	SPINE FIN™	SPINE FIN™
Rows - F.P.I.	1 - 24	1 - 24	1 - 24	1 - 24
Face Area (Sq. Ft.)	21.25	18.75	21.25	18.75
Tube Size (In.)	3/8	3/8	3/8	3/8
<b>Refrigerant</b>				
LBS. - R-454B (O.D. Unit) <sup>(g)</sup>	3 LBS., 12 OZ	3 LBS., 10 OZ	3 LBS., 8 OZ	3 LBS., 8 OZ
Factory Supplied	YES	YES	YES	YES
Valve Connection Size - (in.) O.D. Gas	3/4	3/4	3/4	3/4
Valve Connection Size - (in.) O.D. Liq	5/16	5/16	5/16	5/16
Line Size - (in.) O.D. Gas <sup>(h)</sup>	3/4	3/4	3/4	7/8
Line Size - (in.) O.D. Gas	5/16	5/16	5/16	5/16
<b>Charging Specifications</b>				
Subcooling	10°F	10°F	10°F	10°F
<b>Dimensions</b>	H X W X D			
Crated (In.)	42 x 30 x 33	38 x 30 x 33	42 x 30 x 33	38 x 30 x 33
<b>Weight</b>				
Shipping (lbs.)	220	183	220	183
Net (lbs.)	184	156	184	156
<b>Optional Accessories:</b>				
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079	AY28X079

**Table 2. 5TTR4018 – 5TTR4036 (continued)**

Model No. (a) (b)	5TTR4018A1000A	5TTR4024A1000A	5TTR4030A1000A/B	5TTR4036A1000A/B
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Extreme Condition Mount Kit	BAYECMT023	BAYECMT023	BAYECMT023	BAYECMT023
Start Kit	BAYKSKT263	BAYKSKT263	BAYKSKT263	BAYKSKT263
Crankcase Heater Kit	BAYCCHT302	BAYCCHT302	BAYCCHT302	BAYCCHT302
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001	BAYSEAC001
Low Ambient Kit	BAYLOAM107A	BAYLOAM107A	BAYLOAM107A	BAYLOAM107A
Service Valve Panel Cover	TAYSVPANL0032AA	TAYSVPANL0032AA	TAYSVPANL0044AA	TAYSVPANL0044AA
Refrigerant Lineset (i)				

(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

(b) Rated in accordance with AHRI standard 270.

(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

(d) This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.

(e) Use start components only when compressor is found to enter locked rotor condition and will not start or when lights dim at compressor start. No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

(f) Standard Air - Dry Coil - Outdoor

(g) This value approximate. For more precise value see unit nameplate.

(h) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006\*-EN) for long line sets or specialty applications (xx denotes latest revision).

(i) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

**Table 3. 5TTR4042 – 5TTR4060**

Model No. (a) (b)	5TTR4042A1000A/B	5TTR4048A1000A/B	5TTR4060A1000A/B
Power Conns. - V/PH/HZ (c)	208/230/1/60	208/230/1/60	208/230/1/60
Min. BRCH. CIR. Ampacity	19 / 23	23 / 25	28 / 30
BR. CIR. PROT. RTG. - Max. (Amps)	30 / 40	35 / 45	50
<b>Compressor</b>	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL
No. Used - No. Stages	1 - 1	1 - 1	1 - 1
Volts/Ph/Hz	208/230/1/60	208/230/1/60	208/230/1/60
RL Amps <sup>(d)</sup> - LR Amps	14.7 - 109.1 / 17.9 - 95.9	17.3 - 126 / 19.6 - 118	21.8 - 143 / 23.4 - 134
Factory Installed			
Start Components (e)	NO	NO (Uses BAYKSKT263)	NO (Uses BAYKSKT263)
Insulation/Sound Blanket	NO	NO	NO
Compressor Heat	NO	NO	NO
<b>Outdoor Fan</b>	PROPELLER	PROPELLER	PROPELLER
Dia. (in.) - No. Used	27.5 - 1	27.5 - 1	27.5 - 1
Type Drive - No. Speeds	DIRECT - 1	DIRECT - 1	DIRECT - 1
CFM @ 0.0 (in.) W.G. (f)	4841	5165	5255
No. Motors - HP	1 - 1/5	1 - 1/5	1 - 1/5
Motor Speed R.P.M.	850	850	850
Volts/Ph/Hz	208/230/1/60	208/230/1/60	208/230/1/60
FL Amps	1.05	0.93	0.93
<b>Outdoor Coil - Type</b>	SPINE FIN™	SPINE FIN™	SPINE FIN™
Rows - F.P.I.	1 - 24	1 - 24	1 - 24
Face Area (Sq. Ft.)	24.93	30.8	30.8
Tube Size (In.)	3/8	3/8	3/8
<b>Refrigerant</b>			
LBS. - R-454B (O.D. Unit) (g)	5 LBS., 1 OZ	6 LBS., 10 OZ	5 LBS., 15 OZ



## Product Specifications

**Table 3. 5TTR4042 – 5TTR4060 (continued)**

Model No. (a) (b)	5TTR4042A1000A/B	5TTR4048A1000A/B	5TTR4060A1000A/B
Factory Supplied	YES	YES	YES
Valve Connection Size - (in.) O.D. Gas	7/8	7/8	7/8
Valve Connection Size - (in.) O.D. Liq	5/16	5/16	5/16
Line Size - (in.) O.D. Gas <sup>(h)</sup>	7/8	7/8	7/8
Line Size - in. O.D. Liq.	5/16	5/16	5/16
<b>Charging Specifications</b>			
Subcooling	10°F	10°F	10°F
<b>Dimensions</b>			
	H x W x D		
Crated (In.)	42.5 x 35 x 38	50.5 x 35 x 38	50.5 x 35 x 38
<b>Weight</b>			
Shipping (lbs.)	246	307	302
Net (lbs.)	212	257	252
<b>Optional Accessories:</b>			
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101
Extreme Condition Mount Kit	BAYECMT004	BAYECMT004	BAYECMT004
Start Kit	BAYKSKT263	BAYKSKT263	BAYKSKT263
Crankcase Heater Kit	BAYCCHT301	BAYCCHT301	BAYCCHT301
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001
Low Ambient Kit	BAYLOAM107A	BAYLOAM107A	BAYLOAM107A
Service Valve Panel Cover	TAYSVPANL0046AA	TAYSVPANL0046AA	TAYSVPANL0046AA
Refrigerant Lineset <sup>(i)</sup>			

(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

(b) Rated in accordance with AHRI standard 270.

(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

(d) This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.

(e) Use start components only when compressor is found to enter locked rotor condition and will not start or when lights dim at compressor start. No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

(f) Standard Air - Dry Coil - Outdoor

(g) This value approximate. For more precise value see unit nameplate.

(h) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006\*-EN) for long line sets or specialty applications (xx denotes latest revision).

(i) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.



# Sound Power Level

**Table 4. Sound power level**

MODEL	A-Weighted Sound Power Level [dB(A)]	Full Octave Sound Power(dB)							
		63 Hz*	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
5TTR4018A	73	79	69	67	70	70	64	59	53
5TTR4024A	71	78	72	69	68	66	61	58	53
5TTR4030A	73	79	69	67	70	70	64	59	53
5TTR4036A	71	78	72	69	68	66	61	58	53
5TTR4042A	71	78	72	69	68	66	61	58	53
5TTR4048A	71	81	75	71	70	68	63	58	53
5TTR4060A	71	81	75	71	70	68	63	58	53

**Note:** Rated in accordance with AHRI Standard 270–2008 \*For reference only.



## Accessory Description and Usage

**Anti-Short Cycle Timer** — Solid state timing device that prevents compressor recycling until five (5) minutes have elapsed after satisfying call or power interruptions. Use in area with questionable power delivery, commercial applications, long lineset, etc.

**Evaporation Defrost Control** — SPST Temperature actuated switch that cycles the condenser off as indoor coil reaches freeze-up conditions. Used for low ambient cooling to 30°F with TXV.

**Rubber Isolators** — Five (5) large rubber donuts to isolate condensing unit from transmitting energy into mounting frame or pad. Use on any application where sound transmission needs to be minimized.

**Hard Start Kit** — Start capacitor and relay to assist compressor motor start-up. Use in areas with marginal power supply, on long linesets, low ambient conditions, etc.

**Extreme Condition Mount Kit** — Bracket kits to securely mount condensing unit to a frame or pad without removing any panels. Use in areas with high winds, or on commercial roof tops, etc.

### AHRI Standard Capacity Rating Conditions


AHRI Standard 210/240 Rating Conditions

1. Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.
2. High Temperature Heating 47°F DB, 43°F WB air entering outdoor coil, 70°F DB air entering indoor coil.
3. Low Temperature Heating 17°F DB air entering indoor coil.
4. Rated indoor airflow for heating is the same as for cooling.

**AHRI Standard 270 Rating Conditions** — (Noise rating numbers are determined with the unit in cooling operations.) Standard Noise Rating number is at 95°F outdoor air.

## Model Nomenclature


### Outdoor Units

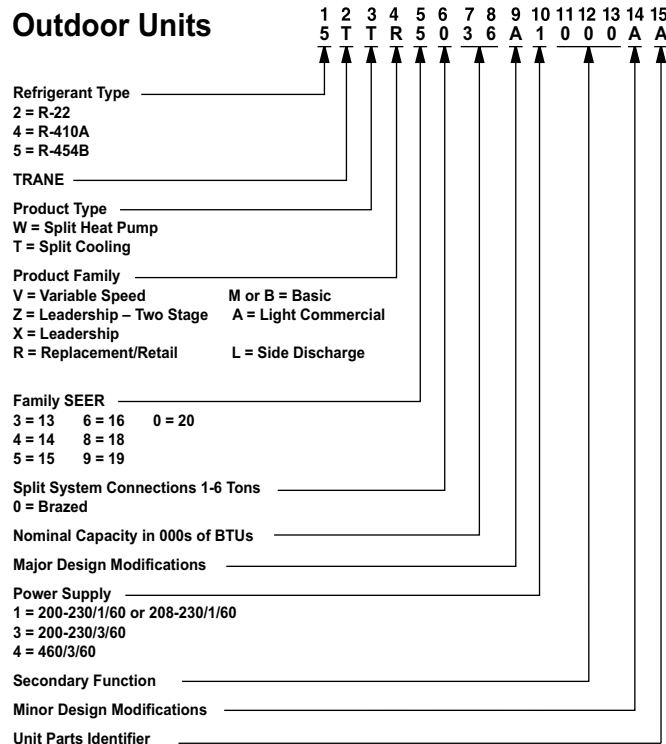

# Wiring Diagrams

**Figure 1. 018A – 048A models**

TO POWER SUPPLY PER UNIT NAMEPLATE AND LOCAL CODES

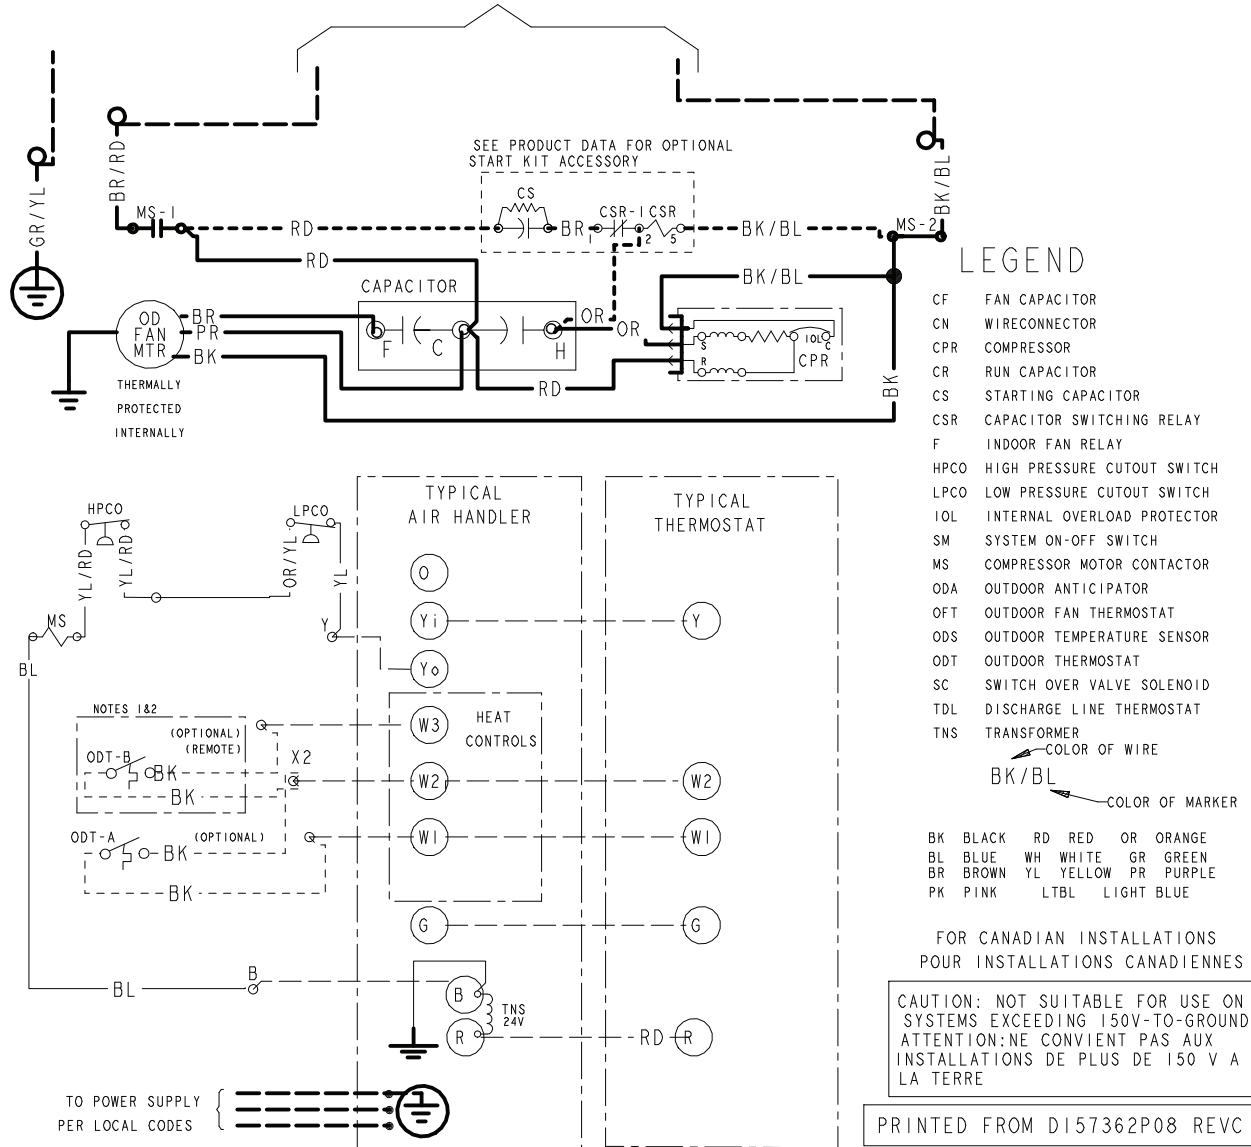


**Figure 2. 018A – 048A models**

**NOTES:**

1. IF ODT-B IS NOT USED. ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER. IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED. ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V) FIELD WIRING MUST BE 18 AWG MIN.
- ▲ 4. FIELD GROUND MUST BE ATTACHED TO THE GROUND LUG ON THE RUNTRU AND AMERISTAR UNITS.
- ▲ 5. GROUND CONNECTION FOR TRANE/ AMERICAN STANDARD ONLY.


**LEGEND**

- 24 V } FACTORY LINE WIRING
- - - 24 V } FIELD WIRING
- - - FIELD INSTALLED FACTORY WIRING
- ⎓ MAGNETIC COIL
- ⏏ GROUND
- JUNCTION
- ⏏ CAPACITOR
- ⏏ WIRE NUT OR
- TERMINAL
- ⏏ TRANSFORMER
- ⏏ FUSE
- ⏏ TERMINAL BLOCK/BOARD
- ⏏ RELAY CONTACT (N.O.)
- ⏏ RELAY CONTACT (N.C.)
- ⏏ THERMISTOR
- ⏏ TEMP ACTUATED SWITCH
- ⏏ INTERNAL OVERLOAD PROTECTION
- ⏏ PRESSURE ACTUATED SWITCH
- ⏏ RESISTOR OR HEATING ELEMENT
- ⏏ MOTOR WINDING
- ⏏ POL. PLUG FEMALE HOUSING (MALE TERMINALS)
- ⏏ POL. PLUG MALE HOUSING (FEMALE TERMINALS)

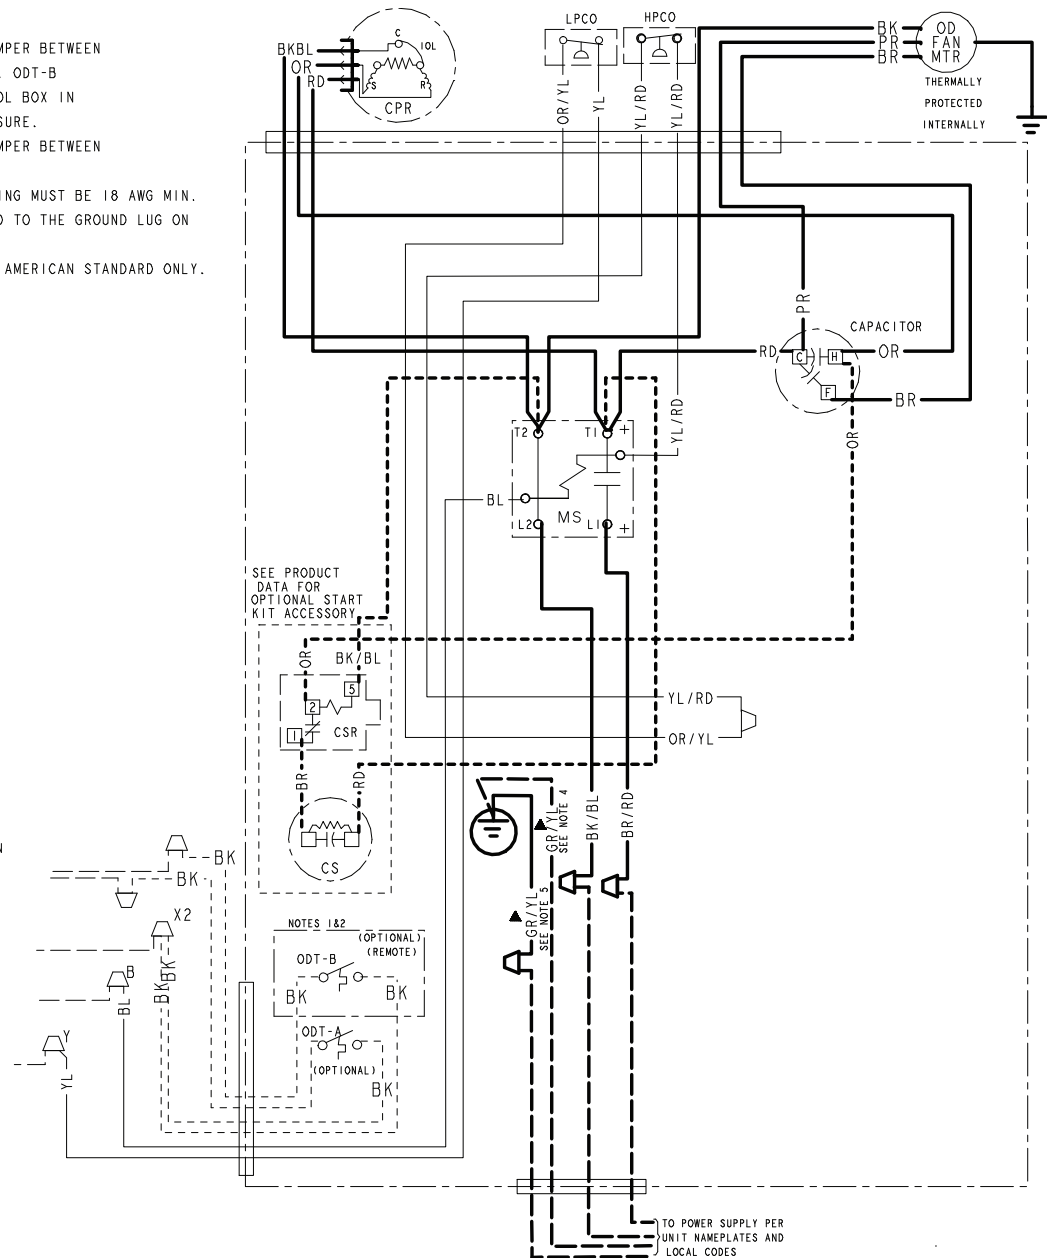


PRINTED FROM D157362P08 REV C

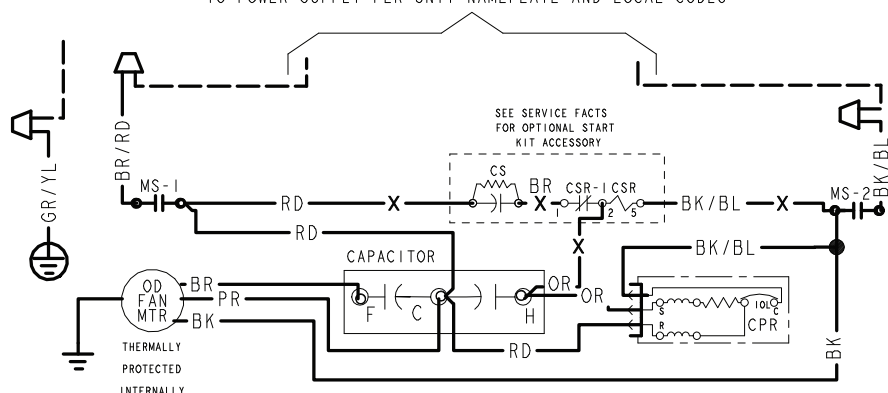

TO POWER SUPPLY PER UNIT NAMEPLATE AND LOCAL CODES

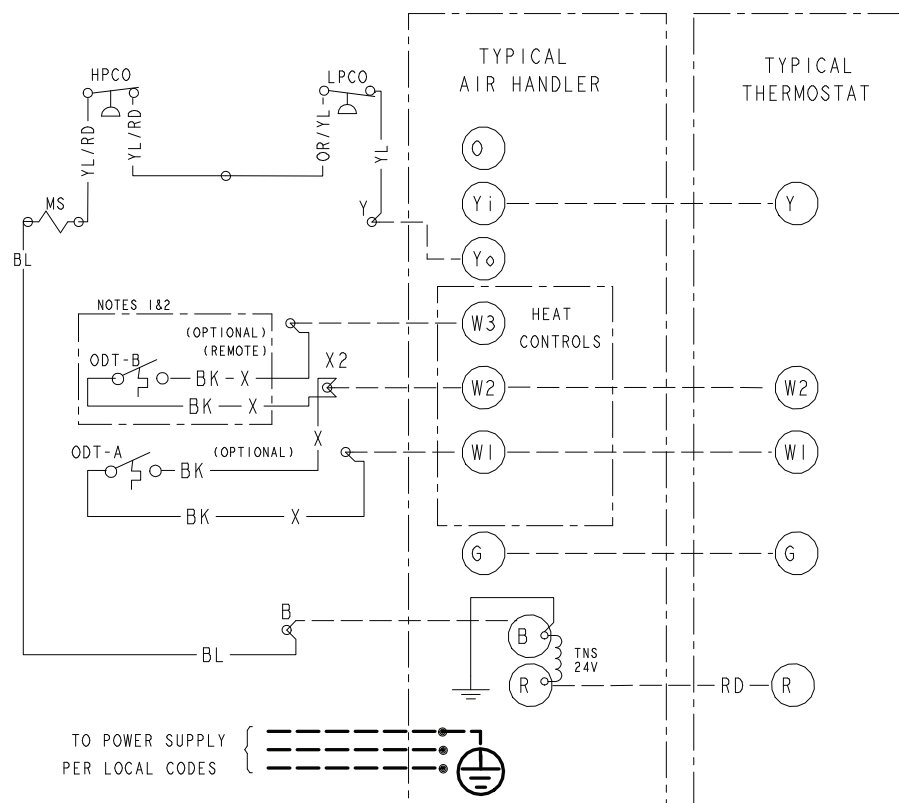

## LEGEND



- |      |                             |
|------|-----------------------------|
| CF   | FAN CAPACITOR               |
| CN   | WIRE CONNECTOR              |
| CPR  | COMPRESSOR                  |
| CR   | RUN CAPACITOR               |
| CS   | STARTING CAPACITOR          |
| CSR  | CAPACITOR SWITCHING RELAY   |
| ODT  | OUTDOOR THERMOSTAT          |
| HPCO | HIGH PRESSURE CUTOUT SWITCH |
| LPCO | LOW PRESSURE CUTOUT SWITCH  |
| MS   | COMPRESSOR MOTOR CONTACTOR  |
| TNS  | TRANSFORMER                 |
| IOL  | INTERNAL OVERLOAD PROTECTOR |

 COLOR OF WIRE  
 BK/BL  
 COLOR OF MARKER

BK	BLACK	RD	RED	OR	ORANGE
BL	BLUE	WH	WHITE	GR	GREEN
BR	BROWN	YL	YELLOW	PR	PURPLE
PK	PINK				

FOR CANADIAN INSTALLATIONS  
POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON  
SYSTEMS EXCEEDING 150V-TO-GROUND  
ATTENTION: NE CONVIENT PAS AUX  
INSTALLATIONS DE PLUS DE 150 V A  
LA TERRE

PRINTED FROM DI60963P01 REVC





## Wiring Diagrams

**Figure 4. 060A models**

**NOTES:**

1. IF ODT-B IS NOT USED. ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER. IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED. ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V) FIELD WIRING MUST BE 18 AWG MINIMUM.
4. USE COPPER CONDUCTORS ONLY!
- ▲ 5. FIELD GROUND MUST BE ATTACHED TO THE GROUND LUG ON THE RUNTRU AND AMERISTAR UNITS.
- ▲ 6. GROUND CONNECTION FOR TRANE/ AMERICAN STANDARD ONLY.


### LEGEND

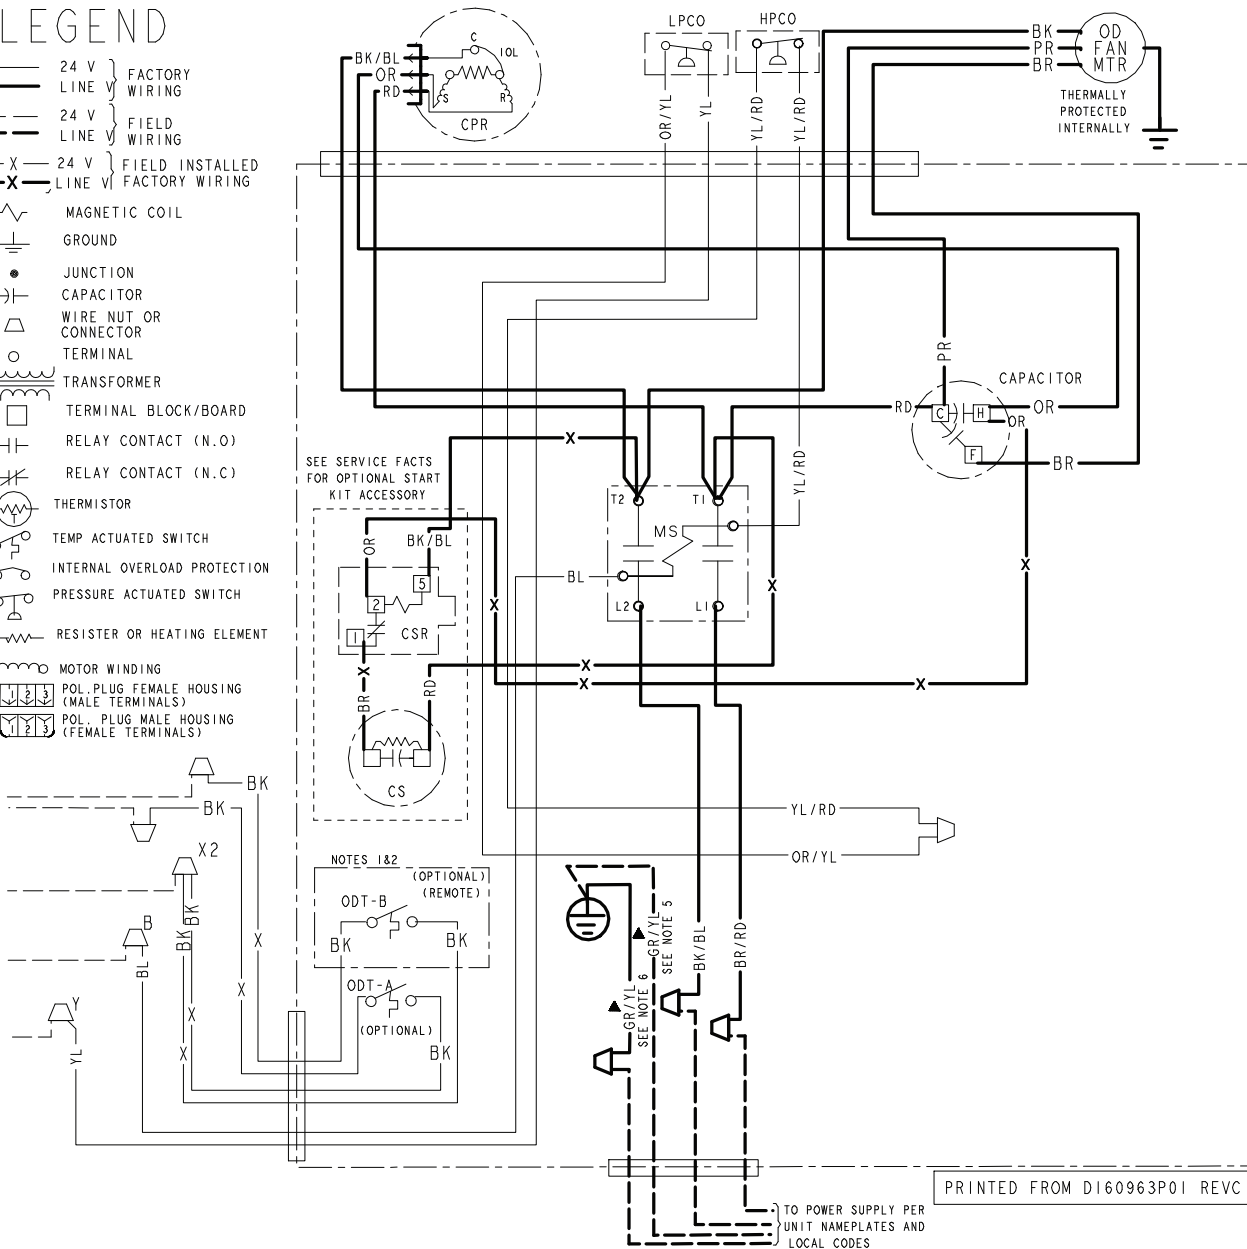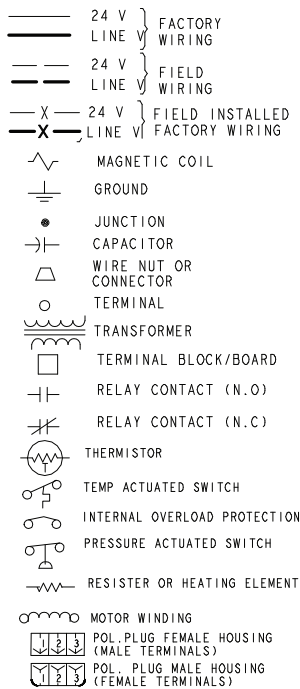

PRINTED FROM DI60963P01 REV C

# Dimensional Data

**Figure 5. Dimensional data**

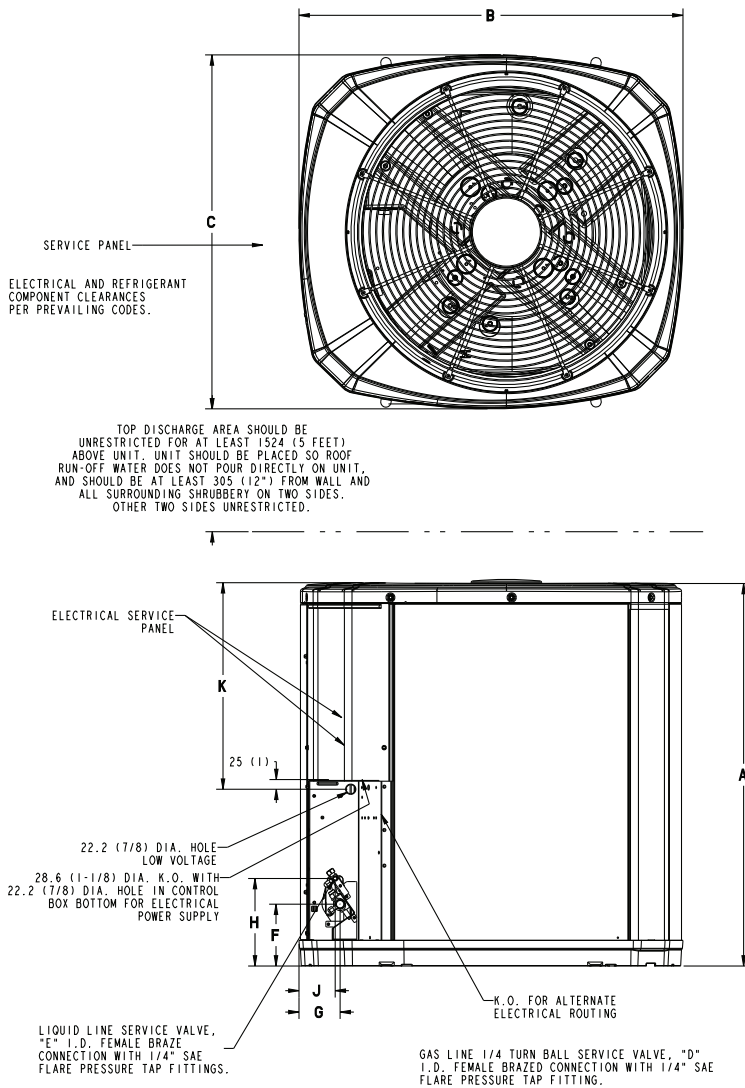

**Table 5. Unit dimensions**

Model	Base	A	B	C	D	E	F	G	H	J	K
5TTR4018A	3	933 (36-3/4)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	143 (5-5/8)	92 (3-5/8)	210 (8-1/4)	79 (3-1/8)	508 (20)
5TTR4024A	3	832 (32-3/4)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	127 (5)	76 (3)	197 (7-3/4)	60 (2-3/8)	508 (20)
5TTR4030A	3	933 (36-3/4)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	143 (5-5/8)	92 (3-5/8)	210 (8-1/4)	79 (3-1/8)	508 (20)
5TTR4036A	3	832 (32-3/4)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	127 (5)	76 (3)	197 (7-3/4)	60 (2-3/8)	508 (20)
5TTR4042A	4	943 (37-1/8)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	143 (5-5/8)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
5TTR4048A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)
5TTR4060A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)



# Mechanical Specification Options

## General

The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 60335-2-40. Exterior is designed for outdoor application.

## Casing

Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish. The corner panels are prepainted. All panels are subjected to our 1,000 hour salt spray test.

## Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor and low and high pressure switches. A factory supplied, field installed liquid line drier is standard.

## Compressor

The compressor features internal over temperature and pressure protection. Other features include: Centrifugal oil pump and low vibration and noise.

## Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

## Low Ambient Cooling

As manufactured, this system has a cooling capacity to 55°F. The addition of an evaporator defrost control permits operation to 40°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30°F.

The addition of the BAYLOAM107A low ambient kit permits ambient cooling to 20°F.

**Thermostats** – Cooling only and heat/cooling (manual and automatic change over). Sub-base to match thermostat and locking thermostat cover.





Trane - by Trane Technologies (NYSE: TT), a global innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit [trane.com](http://trane.com) or [tranetechnologies.com](http://tranetechnologies.com).



The AHRI Certified mark indicates Trane U.S. Inc. participation in the AHRI Certification program. For verification of individual certified products, go to [ahridirectory.org](http://ahridirectory.org).

Trane has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.